

SC1223K InnoSwitch™ Family



Off-Line CV/CC Flyback Switcher IC with Integrated MOSFET, Sync-Rect and Feedback

Product Highlights

Highly Integrated, Compact Footprint

- Incorporates flyback controller, 650 V MOSFET, secondary-side sensing and synchronous rectification
- Integrated, HIPOT-isolated, feedback link
- Exceptional CV/CC accuracy, independent of transformer design or external components
- Instantaneous transient response $\pm 5\%$ CV with 0-100-0% load step

EcoSmart™ – Energy Efficient

- <10 mW No-load @ 230 VAC with optional bias winding
- Easily meets all global energy efficiency regulations
- Low heat dissipation

Advanced Protection / Safety Features

- Primary sensed output OVP with optional bias winding
- Secondary sensed output overshoot clamp
- Secondary sensed output OCP to zero output voltage
- Hysteretic thermal shutdown

Full Safety and Regulatory Compliance

- 100% production HIPOT compliance testing at 6 kV DC/1 sec
- Reinforced insulation
- Isolation voltage = 3,500 VAC
- UL1577 and TUV (EN60950) safety approved
- EN61000-4-8 (100 A/m) and EN61000-4-9 (1000 A/m) compliant

Green Package

- Halogen free and RoHS compliant


Applications

- Chargers and adapters for smart mobile devices


Description

The InnoSwitch family of ICs dramatically simplifies the development and manufacturing of low voltage, high current power supplies, particularly those in compact enclosures or with high efficiency requirements. The InnoSwitch architecture is revolutionary in that the devices incorporate both primary and secondary controllers, with sense elements and a safety-rated feedback mechanism into a single IC.

Close component proximity and innovative use of the integrated communication link permit accurate control of a secondary-side synchronous rectification MOSFET and optimization of primary-side switching to maintain high efficiency across the entire load range. Additionally, the minimal DC bias requirements of the link, enables the system to achieve less than 10 mW no-load in challenging applications such as smart-mobile device chargers.

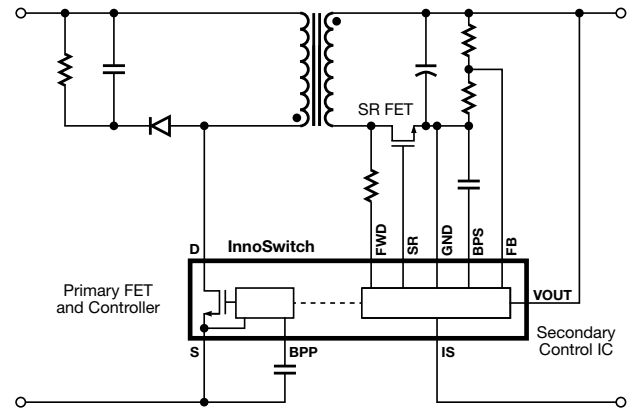

(a) Typical Application Schematic PI-6986-031113

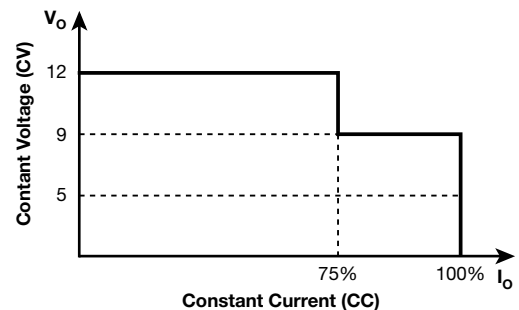

PI-7146-121213

(b) Output Characteristic

Figure 1. Typical Application/Performance.




Figure 2. High Creepage, Safety-Compliant eSOP Package.

Output Power Table

Product ³	230 VAC $\pm 15\%$		85-265 VAC	
	Adapter ¹	Peak or Open Frame ²	Adapter ¹	Peak or Open Frame ²
SC1223K	18 W	22 W	18 W	22 W

Table 1. Output Power Table.

Notes:

1. Minimum continuous power in a typical non-ventilated enclosed adapter measured at 40 °C ambient. Assumes +12 V output.
2. Minimum peak power capability.
3. Package: KR: eSOP-R16B.

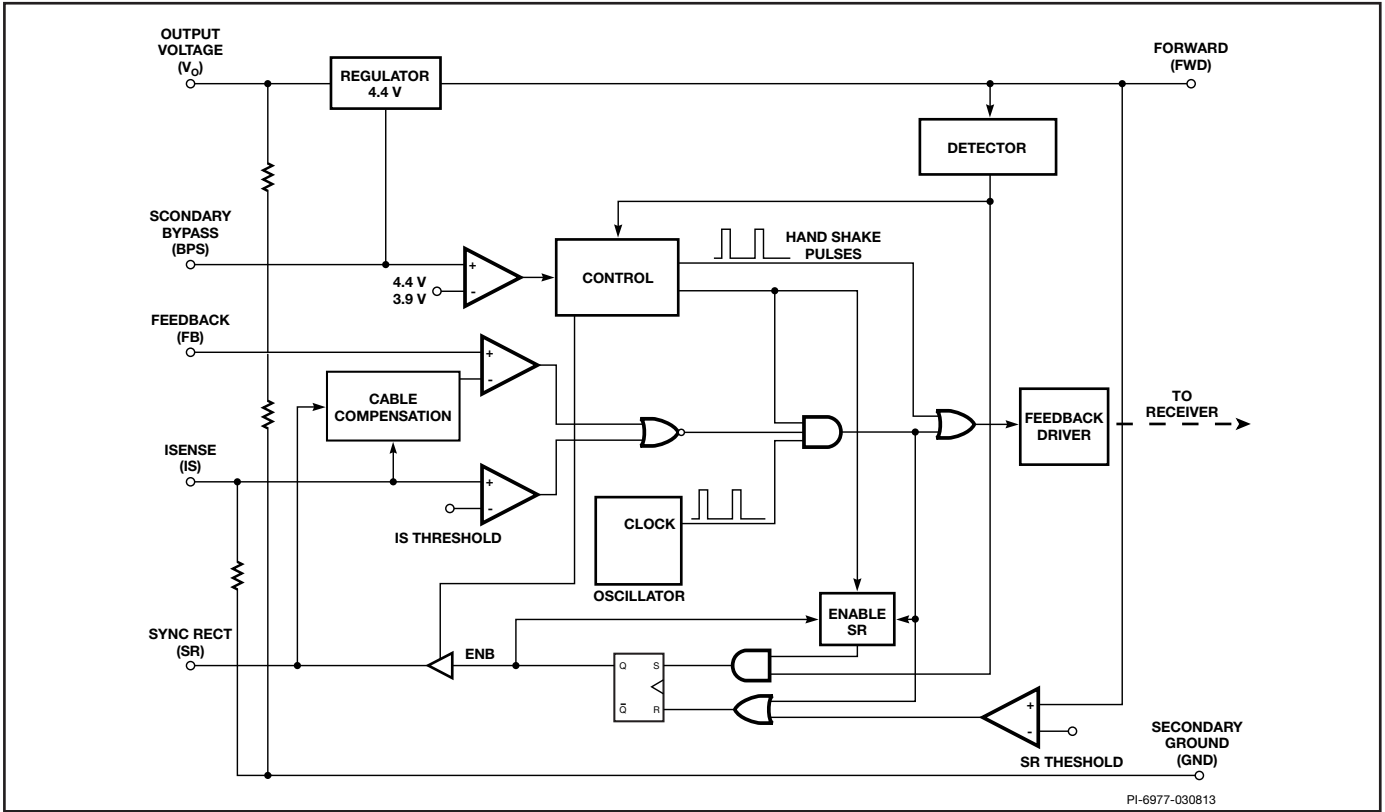


Figure 3. Secondary-Side Controller Block Diagram.

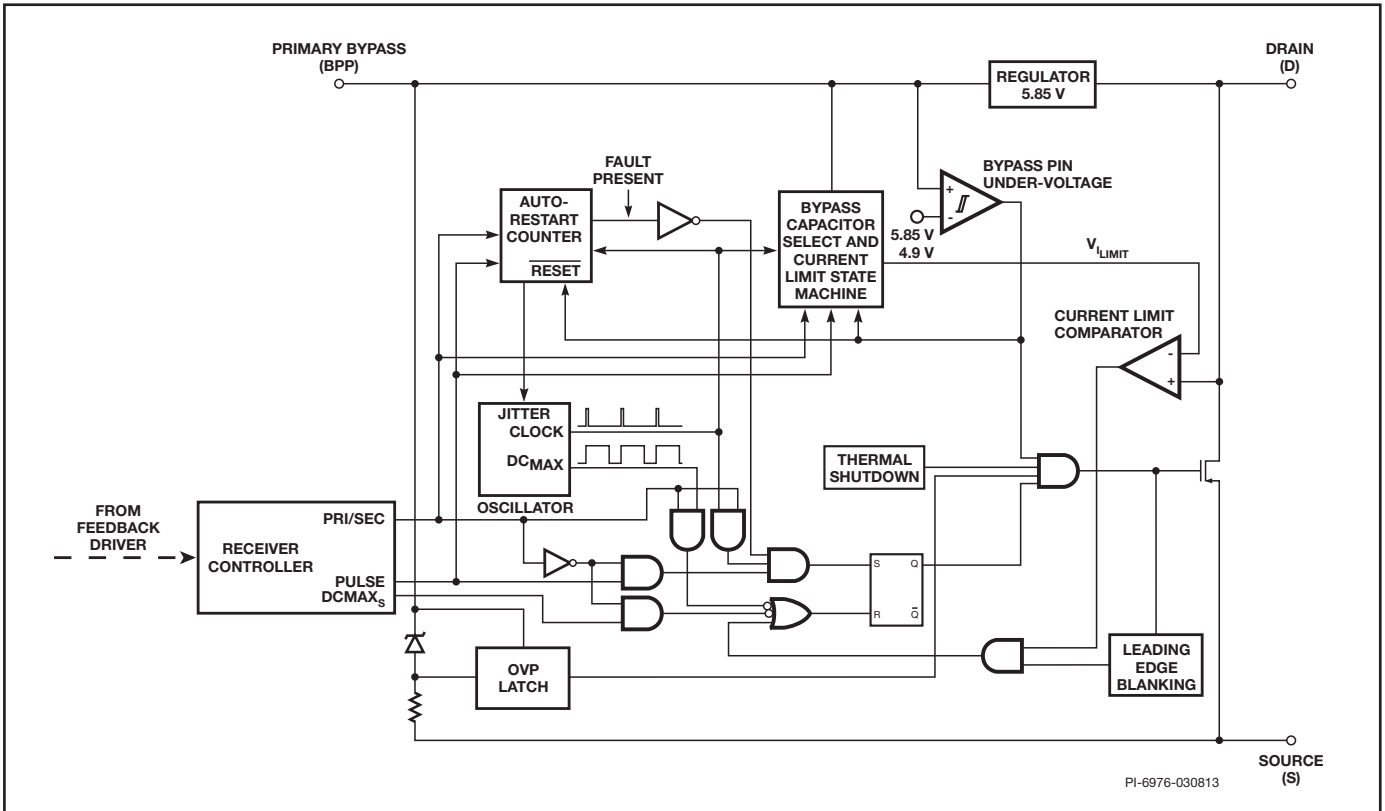


Figure 4. Primary-Side Controller Buck Diagram.

Pin Functional Description

Drain (D) Pin: (Pin 1)

This pin is the power MOSFET drain connection.

PRIMARY BYPASS (BPP) Pin: (Pin 7)

It is the connection point for an external bypass capacitor for the primary IC supply.

FEEDBACK (FB) Pin: (Pin 14)

This pin connects to an external resistor divider to set the power supply CV voltage regulation threshold.

FORWARD (FWD) Pin: (Pin 10)

The connection point to the switching node of the transformer output winding for sensing and other functions.

OUTPUT VOLTAGE (VOUT) Pin: (Pin 11)

This pin is connected directly to the output voltage of the power supply to provide bias to the secondary IC.

SYNCHRONOUS RECTIFIER DRIVE (SR) Pin: (Pin 12)

Connection to external SR FET gate terminal.

SECONDARY BYPASS (BPS) Pin: (Pin 13)

It is the connection point for an external bypass capacitor for the secondary IC supply.

SECONDARY GROUND (GND): (Pin 15)

Ground connection for the secondary IC.

ISENSE (IS) Pin: (Pin 16)

Connection to the power supply output terminals. Internal current sense is connected between this pin and the SECONDARY GROUND pin.

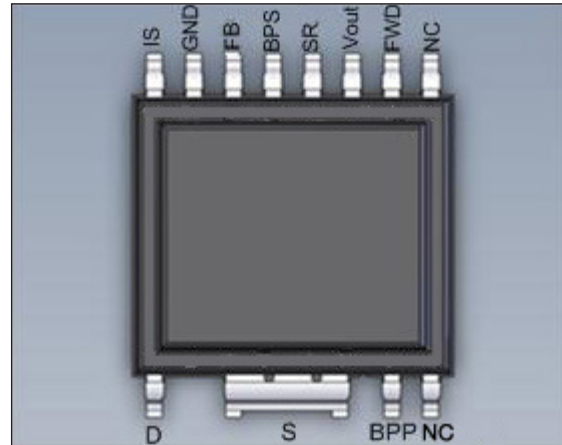


Figure 5. Pin Configuration.

InnoSwitch Operation

InnoSwitch devices operate in the current limit mode. When enabled, the oscillator turns the power MOSFET on at the beginning of each cycle. The MOSFET is turned off when the current ramps up to the current limit or when the DC_{MAX} limit is reached. Since the highest current limit level and frequency of a InnoSwitch design are constant, the power delivered to the load is proportional to the primary inductance of the transformer and peak primary current squared. Hence, designing the supply involves calculating the primary inductance of the

transformer for the maximum output power required. If the InnoSwitch is appropriately chosen for the power level, the current in the calculated inductance will ramp up to current limit before the DC_{MAX} limit is reached.

InnoSwitch senses the output voltage on the FEEDBACK pin using a resistive voltage divider to determine whether or not to proceed with the next switching cycle. The sequence of cycles is used to determine the current limit. Once a cycle is started, it

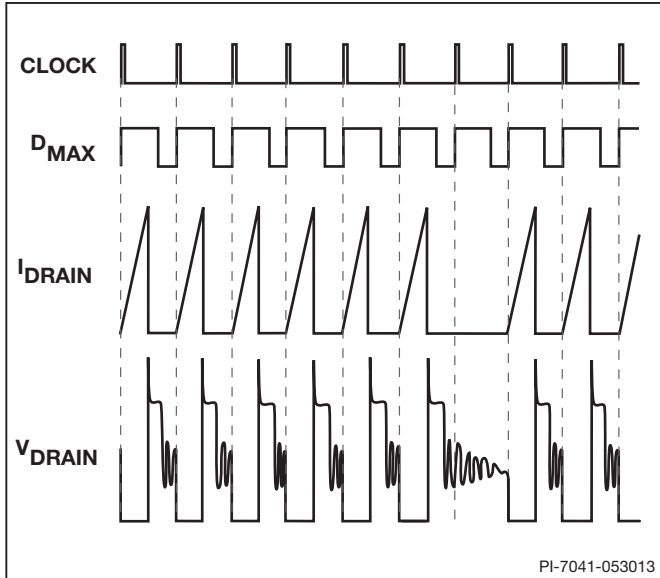


Figure 6. Operation at Near Maximum Loading.

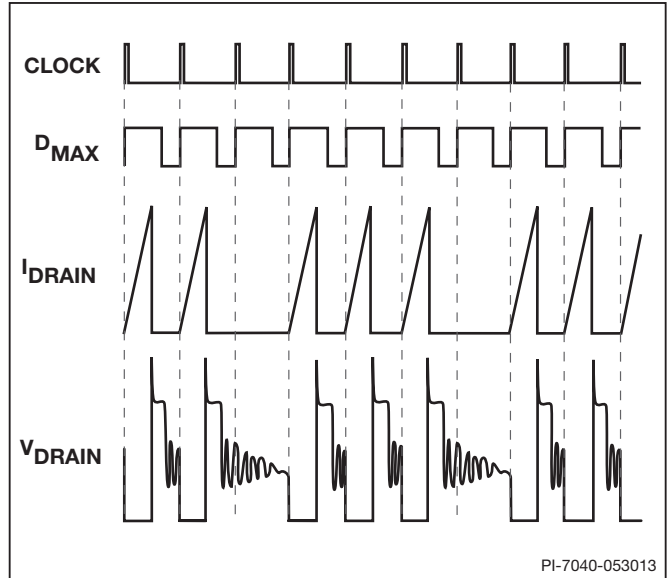


Figure 7. Operation at Moderately Heavy Loading.

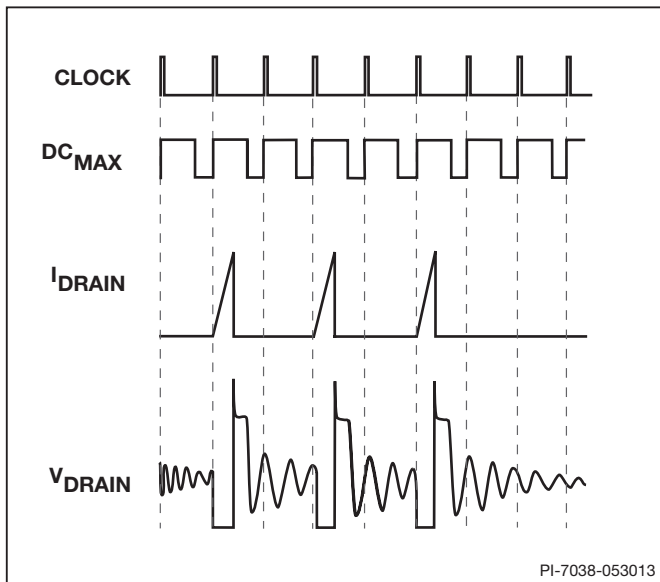


Figure 8. Operation at Medium Loading.

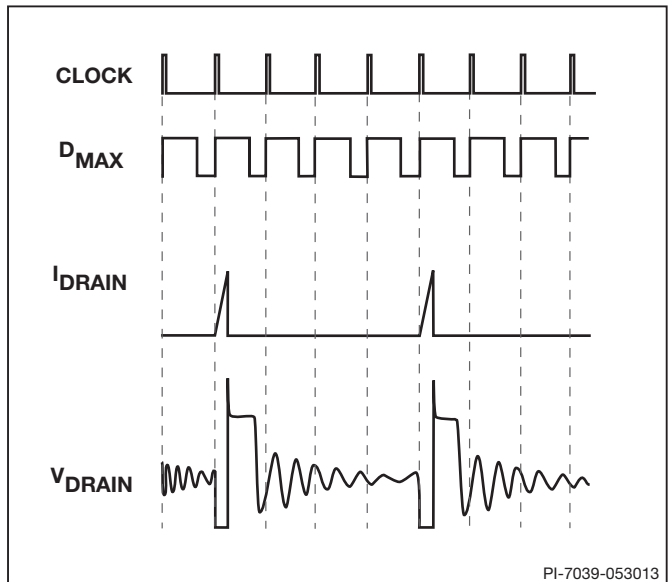


Figure 9. Operation at Very Light Load.

always completes the cycle. This operation results in a power supply in which the output voltage ripple is determined by the output capacitor, and the amount of energy per switch cycle.

ON/OFF Operation with Current Limit State Machine

The internal clock of the InnoSwitch runs all the time. At the beginning of each clock cycle, the voltage comparator on the FEEDBACK pin decides whether or not to implement a switch cycle, and based on the sequence of samples over multiple cycles, it determines the appropriate current limit. At high loads, the state machine sets the current limit to its highest value. At lighter loads, the state machine sets the current limit to reduced values.

At near maximum load, InnoSwitch will conduct during nearly all of its clock cycles (Figure 6). At slightly lower load, it will “skip” additional cycles in order to maintain voltage regulation at the power supply output (Figure 7). At medium loads, cycles will be skipped and the current limit will be reduced (Figure 8). At very light loads, the current limit will be reduced even further (Figure 9). Only a small percentage of cycles will occur to satisfy the power consumption of the power supply.

The response time of the ON/OFF control scheme is very fast compared to PWM control. This provides tight regulation and excellent transient response.

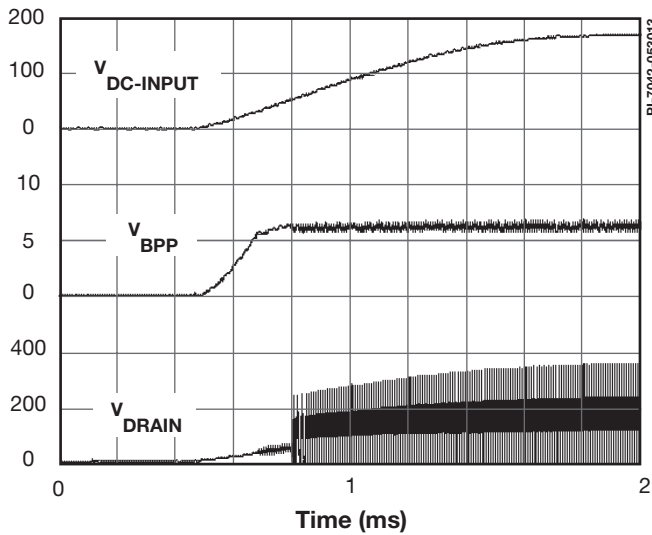


Figure 10. Power-Up.

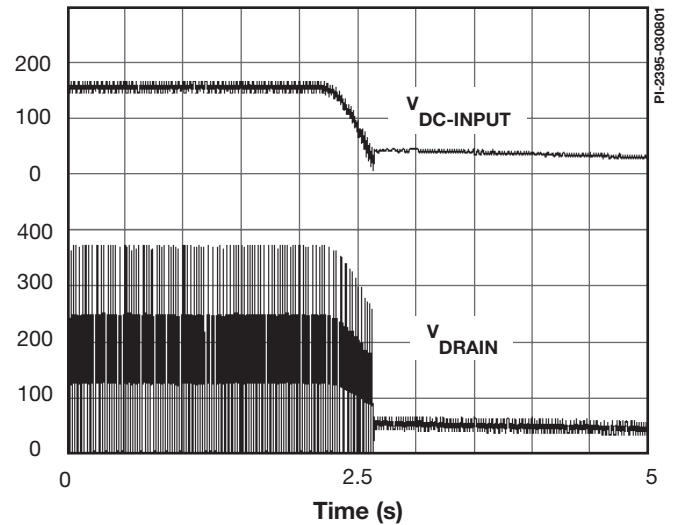


Figure 11. Normal Power-Down Timing.

Absolute Maximum Ratings^{1,2}

DRAIN Pin Voltage	-0.3 V to 650 V	Lead Temperature	260 °C
DRAIN Pin Peak Current	1710 (3200) mA ³	Notes:	
PRIMARY BYPASS/SECONDARY BYPASS Pin Voltage.....	-0.3 V to 9 V	1. All voltages referenced to Source and Secondary Ground, T _A = 25 °C.	
PRIMARY BYPASS/SECONDARY BYPASS Pin Current	100 mA	2. Maximum ratings specified may be applied one at a time without causing permanent damage to the product. Exposure to Absolute Maximum Ratings conditions for extended periods of time may affect product reliability.	
FORWARD Pin Voltage.....	-1.5 V to 150 V	3. Higher peak Drain current is allowed while the Drain voltage is simultaneously less than 400 V.	
FEEDBACK Pin Voltage	-0.3 to 9 V	4. Normally limited by internal circuitry.	
SR/P Pin Voltage	-0.3 to 9 V	5. 1/16" from case for 5 seconds.	
OUTPUT VOLTAGE Pin Voltage.....	-0.3 to 15 V		
Storage Temperature	-65 to 125 °C		
Operating Junction Temperature ⁴	-40 to 125 °C		
Ambient Temperature.....	-40 to 85 °C		

Thermal Resistance

Thermal Resistance: K Package:	Notes:
(θ _{JA}).....65 °C/W ³ , 69 °C/W ²	1. Measured on the SOURCE pin close to the plastic interface.
(θ _{JC}).....12 °C/W	2. Solder to 0.36 sq. in (232 mm ²), 2 oz. (610 g/m ²) copper clad.
	3. Solder to 1 sq. in (645 mm ²), 2 oz. (610 g/m ²) copper clad.
	4. The case temperature is measured at the bottom-side exposed pad.

Parameter	Conditions	Rating	Units
-----------	------------	--------	-------

Ratings for UL1577 (Adapter power rating is derated power capability)			
Primary-Side Current Rating	Current from pin (3-6) to pin 1	1.5	A
Primary-Side Power Rating	T _{AMB} = 25 °C (Device mounted in socket resulting in T _{CASE} = 120 °C)	1.35	W
Secondary-Side Current Rating	Current from pin 16 to pin 15	2.0	A
Secondary-Side Power Rating	T _{AMB} = 25 °C (Device mounted in socket)	0.125	W

Parameter	Symbol	Conditions SOURCE = 0 V T _{Jl} = -40 °C to +125 °C (Note C) (Unless Otherwise Specified)	Min	Typ	Max	Units

Control Functions							
Output Frequency Applies to Both Primary and Secondary Controllers	f _{OSC}	T _J = 25 °C	Average	93	100	107	kHz
			Peak-to-Peak Jitter		6		
Maximum Duty-Cycle	DC _{MAX}	T _J = 0 °C to 125 °C	60				%

Parameter	Symbol	Conditions	Min	Typ	Max	Units
		SOURCE = 0 V $T_{Jl} = -40\text{ }^{\circ}\text{C}$ to $+125\text{ }^{\circ}\text{C}$ (Unless Otherwise Specified)				
Control Functions (cont.)						
PRIMARY BYPASS Pin Supply Current	I_{S1}	$V_{BPP} = V_{BPP} + 0.1\text{ V}$ (MOSFET not Switching) See Note 2		240	300	μA
	I_{S2}	$T_J = 25\text{ }^{\circ}\text{C}$, $V_{BPP} = V_{BPP} + 0.1\text{ V}$ (MOSFET Switching at f_{OSC}) See Note 1,3		980	1100	
PRIMARY BYPASS Pin Charge Current	I_{CH1}	$T_J = 25\text{ }^{\circ}\text{C}$, $V_{BP} = 0\text{ V}$ See Notes 4, 5	-5.0	-4.5	-4.0	mA
	I_{CH2}	$T_J = 25\text{ }^{\circ}\text{C}$, $V_{BP} = 4\text{ V}$ See Notes 4, 5	-3.5	-3.0	-2.4	
PRIMARY BYPASS Pin Voltage	V_{BPP}	See Note 4	5.75	5.95	6.15	V
PRIMARY BYPASS Pin Voltage Hysteresis	$V_{BPP(H)}$		0.50	0.57	0.65	V
PRIMARY BYPASS Shunt Voltage	V_{SHUNT}	$I_{BPP} = 2\text{ mA}$	6.16	6.45	6.70	V
Circuit Protection						
Standard Current Limit (BPP) Capacitor = 0.1 μF	I_{LIMIT} See Note 5	$di/dt = 213\text{ mA}/\mu\text{s}$ $T_J = 25\text{ }^{\circ}\text{C}$	874	950	1026	mA
Reduced Current Limit (BPP) Capacitor = 1 μF	$I_{LIMIT-1}$ See Note 5	$di/dt = 213\text{ mA}/\mu\text{s}$ $T_J = 25\text{ }^{\circ}\text{C}$	790	850	945	mA
Increased Current Limit (BPP) Capacitor = 10 μF	$I_{LIMIT+1}$ See Note 5	$di/dt = 213\text{ mA}/\mu\text{s}$ $T_J = 25\text{ }^{\circ}\text{C}$	975	1050	1178	mA
Initial Current Limit	I_{INIT}	$T_J = 25\text{ }^{\circ}\text{C}$ See Note 1	$0.75 \times$ $I_{LIMIT(TYP)}$			mA
Leading Edge Blanking Time	t_{LEB}	$T_J = 25\text{ }^{\circ}\text{C}$ See Note 1	170	250		ns
Current Limit Delay	t_{ILD}	$T_J = 25\text{ }^{\circ}\text{C}$ See Note 1, 6		170		ns
Thermal Shutdown	T_{SD}		135	142	150	$^{\circ}\text{C}$

Parameter	Symbol	Conditions		Min	Typ	Max	Units
		SOURCE = 0 V T _J = -40 °C to +125 °C (Unless Otherwise Specified)					
Circuit Protection (cont.)							
Thermal Shutdown Hysteresis	T _{SD(H)}				75		°C
PRIMARY BYPASS Pin Shutdown Threshold Current	I _{SD}			5.6	7.6	9.6	mA
Primary Bypass Power-up Reset Threshold Voltage	V _{BPP(RESET)}		T _J = 25 °C	2.8	3.0	3.2	V
Auto-Restart On-time at f _{OSC}	t _{AR}		T _J = 25 °C See Note 7	71	76	81	ms
Auto-Restart Trigger Skip Time	t _{AR(SK)}		T _J = 25 °C See Note 7		1		s
Auto-Restart Off-time at f _{OSC}	t _{AR(OFF)}		T _J = 25 °C See Note 7		2		s
Output							
ON-State Resistance	R _{DS(ON)}	I _D = 1050 mA	T _J = 25 °C	1.30	1.60	2.20	Ω
			T _J = 100 °C	2.15	2.30	2.80	
OFF-State Drain Leakage Current	I _{DSS1}		V _{BPP} = 6.2 V V _{DS} = 520 V T _J = 125 °C See Note 8			200	μA
	I _{DSS1}		V _{BPP} = 6.2 V V _{DS} = 325 V T _J = 25 °C See Notes 1, 8		15		μA
Breakdown Voltage	BV _{DSS}		V _{BPP} = 6.2 V T _J = 25 °C See Note 9	650			V
Drain Supply Voltage				50			V
Secondary							
FEEDBACK Pin Voltage	V _{FB}		T _J = 25 °C	1.250	1.265	1.280	V
FEEDBACK Pin Voltage at Turn-Off Voltage	V _{FB(AR)}			0.58 × V _{FB}	0.63 × V _{FB}	0.68 × V _{FB}	
Cable Drop Compensation Factor	ϕ _{CD}		T _J = 25 °C	1.05	1.06	1.07	
SECONDARY BYPASS Pin Current at No-Load	I _{SNL}		T _J = 25 °C	210	240	270	μA

Parameter	Symbol	Conditions		Min	Typ	Max	Units
		SOURCE = 0 V $T_{Jl} = -40\text{ }^{\circ}\text{C}$ to $+125\text{ }^{\circ}\text{C}$ (Unless Otherwise Specified)					
Secondary							
SECONDARY BYPASS Pin Voltage	V_{BPS}			4.3	4.45	4.6	V
SECONDARY BYPASS Pin Undervoltage Threshold	$V_{BPS(UVLO)}$			3.5	3.8	4.2	V
SECONDARY BYPASS Pin Undervoltage Hysteresis	$V_{BPS(HYS)}$			0.25	0.67	1.04	V
Output (IS Pin) Current Limit Voltage Threshold	IS_{VTH}	See Note 10			33		mV
Constant-Current Regulation Threshold	I_{CC}	$T_J = 25\text{ }^{\circ}\text{C}$		2.0			A
Normalized Output Current	I_o	$T_J = 25\text{ }^{\circ}\text{C}$		1.00	1.04	1.08	
Synchronous Rectifier¹							
SYNCHRONOUS RECTIFIER Pin Threshold	V_{SRTH}			-19.5	-24	-28.5	mV
SYNCHRONOUS RECTIFIER Pin Pull-Up Current	I_{SRPU}	$T_J = 25\text{ }^{\circ}\text{C}$ $C_{LOAD} = 2\text{ nF}$, $f_s = 100\text{ kHz}$		145	165	185	mA
SYNCHRONOUS RECTIFIER Pin Pull-Down Current	I_{SRPD}	$T_J = 25\text{ }^{\circ}\text{C}$ $C_{LOAD} = 2\text{ nF}$, $f_s = 100\text{ kHz}$		240	265	290	mA
SYNCHRONOUS RECTIFIER Pin Drive Voltage	V_{SR}			4.2	4.4	4.6	V
Rise Time	t_R	$T_J = 25\text{ }^{\circ}\text{C}$ $C_{LOAD} = 2\text{ nF}$ See Note 1	0-100%		71		Ns
			10-90%		40		
Fall Time	t_F	$T_J = 25\text{ }^{\circ}\text{C}$ $C_{LOAD} = 2\text{ nF}$ See Note 1	0-100%		32		Ns
			10-90%		15		
Output Pull-Up Resistance	R_{PU}	$T_J = 25\text{ }^{\circ}\text{C}$ $V_{SPS} = 4.4\text{ V}$ $I_{SR} = 10\text{ mA}$ See Note 1			11.5		Ω
Output Pull-Down Resistance	R_{PD}	$T_J = 25\text{ }^{\circ}\text{C}$ $V_{SPS} = 4.4\text{ V}$ $I_{SR} = 10\text{ mA}$ See Note 1			3.5		Ω


Notes:

1. This parameter is derived from characterization.
2. I_{S1} is an estimate of device current consumption at no-load, since the operating frequency is so low under these conditions. Total device consumption at no-load is sum of I_{S1} and I_{DSS2} (this does not include secondary losses)
3. Since the output MOSFET is switching, it is difficult to isolate the switching current from the supply current at the Drain. An alternative is to measure the PRIMARY BYPASS pin current at 6.2 V.
4. The PRIMARY BYPASS pin is not intended for sourcing supply current to external circuitry.
5. To ensure correct current limit it is recommended that nominal 0.1 μ F/1 μ F/10 μ F capacitors are used. In addition, the BPP capacitor value tolerance should be equal or better than indicated below across the ambient temperature range of the target application. The minimum and maximum capacitor values are guaranteed by characterization.

Nominal PRIMARY BYPASS Pin Capacitor Value	Tolerance Relative to Nominal Capacitor Value	
	Minimum	Maximum
0.1 μ F	-60%	+100%
1 μ F	-50%	+100%
10 μ F	-50%	N/A

6. This parameter is derived from the change in current limit measured at 1X and 4X of the di/dt shown in the I_{LIMIT} specification.
7. Auto-restart on-time has same temperature characteristics as the oscillator (inversely proportional to frequency).
8. I_{DSS1} is the worst-case OFF state leakage specification at 80% of BV_{DSS} and the maximum operating junction temperature. I_{DSS2} is a typical specification under worst-case application conditions (rectified 265 VAC) for no-load consumption calculations.
9. Breakdown voltage may be checked against minimum BV_{DSS} specification by ramping Drain voltage up to but not exceeding minimum BV_{DSS} .
10. For reference only. This is the total range of current limit threshold which corrects for variations in the current sense bond wire. Both of which are trimmed to set the normalized output constant current.

eSOP-R16B (KR Package)

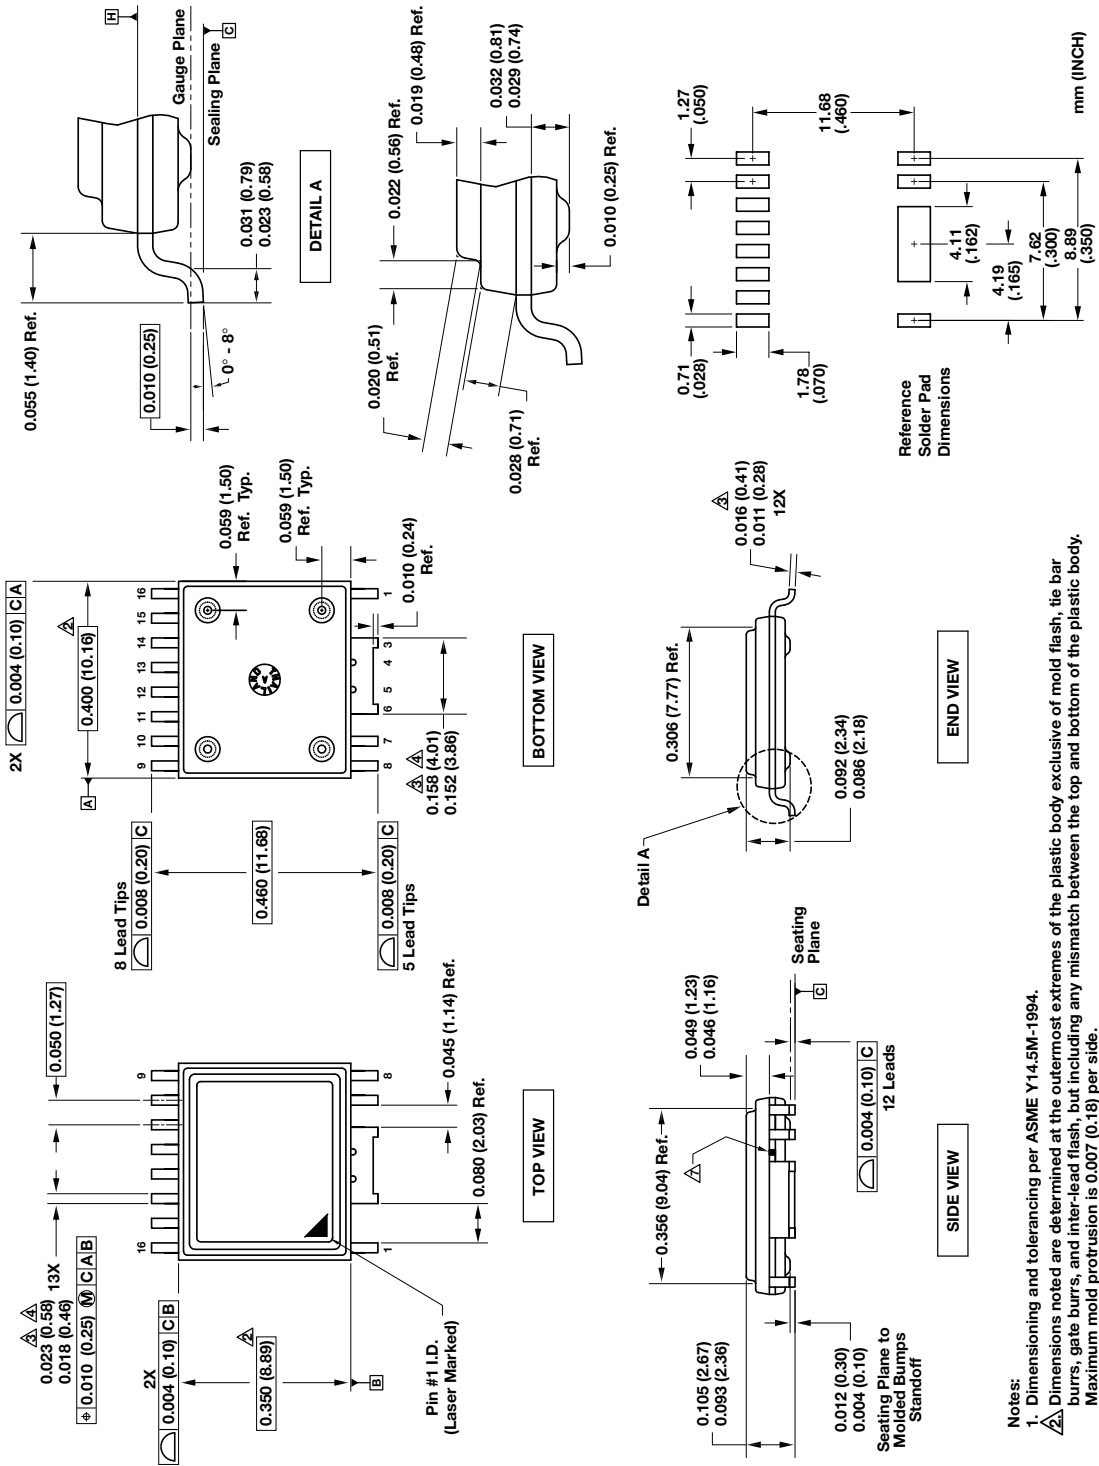

- Notes:
1. Dimensioning and tolerancing per ASME Y14.5M-1994.
 2. Dimensions noted are determined at the outermost extremes of the plastic body exclusive of mold flash, tie bar burrs, gate burrs, and inter-lead flash, but including any mismatch between the top and bottom of the plastic body. Maximum mold protrusion is 0.007 (0.18) per side.
 3. Dimensions noted are inclusive of plating thickness.
 4. Does not include inter-lead flash or protrusions.
 5. Controlling dimensions in inches (mm).
 6. Datums A and B to be determined in Datum H.
 7. Exposed metal at the plastic package body outline/surface between leads 2 and 3, connected internally to lead 2.

Revision	Notes	Date
A	Preliminary	03/14
B	Code A	06/14

For the latest updates, visit our website: www.powerint.com

Power Integrations reserves the right to make changes to its products at any time to improve reliability or manufacturability. Power Integrations does not assume any liability arising from the use of any device or circuit described herein. POWER INTEGRATIONS MAKES NO WARRANTY HEREIN AND SPECIFICALLY DISCLAIMS ALL WARRANTIES INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY RIGHTS.

Patent Information

The products and applications illustrated herein (including transformer construction and circuits external to the products) may be covered by one or more U.S. and foreign patents, or potentially by pending U.S. and foreign patent applications assigned to Power Integrations. A complete list of Power Integrations patents may be found at www.powerint.com. Power Integrations grants its customers a license under certain patent rights as set forth at <http://www.powerint.com/ip.htm>.

Life Support Policy

POWER INTEGRATIONS PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF POWER INTEGRATIONS. As used herein:

1. A Life support device or system is one which, (i) is intended for surgical implant into the body, or (ii) supports or sustains life, and (iii) whose failure to perform, when properly used in accordance with instructions for use, can be reasonably expected to result in significant injury or death to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

The PI logo, TOPSwitch, TinySwitch, LinkSwitch, LYTSwitch, DPA-Switch, PeakSwitch, CAPZero, SENZero, LinkZero, HiperPFS, HiperTFS, HiperLCS, Qspeed, EcoSmart, Clampless, E-Shield, Filterfuse, StakFET, PI Expert and PI FACTS are trademarks of Power Integrations, Inc. Other trademarks are property of their respective companies. ©2014, Power Integrations, Inc.

Power Integrations Worldwide Sales Support Locations

World Headquarters

5245 Hellyer Avenue
San Jose, CA 95138, USA.
Main: +1-408-414-9200
Customer Service:
Phone: +1-408-414-9665
Fax: +1-408-414-9765
e-mail: usasales@powerint.com

China (Shanghai)

Rm 2410, Charity Plaza, No. 88
North Caoxi Road
Shanghai, PRC 200030
Phone: +86-21-6354-6323
Fax: +86-21-6354-6325
e-mail: chinasales@powerint.com

China (ShenZhen)

3rd Floor, Block A,
Zhongtuo International Business
Center, No. 1061, Xiang Mei Rd,
FuTian District, ShenZhen,
China, 518040
Phone: +86-755-8379-3243
Fax: +86-755-8379-5828
e-mail: chinasales@powerint.com

Germany

Lindwurmstrasse 114
80337 Munich
Germany
Phone: +49-895-527-39110
Fax: +49-895-527-39200
e-mail: eurosales@powerint.com

India

#1, 14th Main Road
Vasanthanagar
Bangalore-560052 India
Phone: +91-80-4113-8020
Fax: +91-80-4113-8023
e-mail: indiasales@powerint.com

Italy

Via Milanese 20, 3rd. Fl.
20099 Sesto San Giovanni (MI)
Italy
Phone: +39-024-550-8701
Fax: +39-028-928-6009
e-mail: eurosales@powerint.com

Japan

Kosei Dai-3 Bldg.
2-12-11, Shin-Yokohama,
Kohoku-ku
Yokohama-shi Kanagwan
222-0033 Japan
Phone: +81-45-471-1021
Fax: +81-45-471-3717
e-mail: japansales@powerint.com

Korea

RM 602, 6FL
Korea City Air Terminal B/D, 159-6
Samsung-Dong, Kangnam-Gu,
Seoul, 135-728, Korea
Phone: +82-2-2016-6610
Fax: +82-2-2016-6630
e-mail: koreasales@powerint.com

Singapore

51 Newton Road
#19-01/05 Goldhill Plaza
Singapore, 308900
Phone: +65-6358-2160
Fax: +65-6358-2015
e-mail: singaporesales@powerint.com

Taiwan

5F, No. 318, Nei Hu Rd., Sec. 1
Nei Hu Dist.
Taipei 11493, Taiwan R.O.C.
Phone: +886-2-2659-4570
Fax: +886-2-2659-4550
e-mail: taiwansales@powerint.com

UK

First Floor, Unit 15, Meadway
Court, Rutherford Close,
Stevenage, Herts. SG1 2EF
United Kingdom
Phone: +44 (0) 1252-730-141
Fax: +44 (0) 1252-727-689
e-mail: eurosales@powerint.com

Applications Hotline

World Wide +1-408-414-9660

Applications Fax

World Wide +1-408-414-9760