
Design Example Report

Title	<i>15 W Isolated Flyback Power Supply with StackFET Using InnoSwitch™ 3-AQ INN3996CQ</i>
Specification	30 VDC – 1200 VDC Input; 12 V / 1.25 A Output (>60 VDC Input)
Application	High Input Voltage for Automotive
Author	Applications Engineering Department
Document Number	DER-889Q
Date	April 20, 2021
Revision	1.2

Summary and Features

- High input voltage: up to 1200 VDC
- InnoSwitch3-AQ – industry first AC/DC ICs with isolated, safety rated integrated feedback
- Built-in synchronous rectification for >82% efficiency
- All the benefits of secondary-side control with the simplicity of primary-side regulation
 - Insensitive to transformer variation
 - Extremely fast transient response independent of load timing

PATENT INFORMATION

The products and applications illustrated herein (including transformer construction and circuits external to the products) may be covered by one or more U.S. and foreign patents, or potentially by pending U.S. and foreign patent applications assigned to Power Integrations. A complete list of Power Integrations' patents may be found at www.power.com. Power Integrations grants its customers a license under certain patent rights as set forth at <https://www.power.com/company/intellectual-property-licensing/>.

Power Integrations

5245 Hellyer Avenue, San Jose, CA 95138 USA.
Tel: +1 408 414 9200 Fax: +1 408 414 9201
www.power.com

Table of Contents

1	Introduction	4
2	Power Supply Specification	5
3	Schematic.....	6
4	Circuit Description	7
4.1	INN3996CQ IC Primary	7
4.2	INN3996CQ IC Secondary	7
5	PCB Layout	9
6	Bill of Materials	11
7	Transformer Design.....	12
7.1	Electrical Diagram.....	12
7.2	Electrical Specification.....	12
7.3	Transformer Build Diagram	12
7.4	Material List	13
7.5	Transformer Instruction	13
7.6	Winding Illustrations.....	14
8	Performance Data	21
8.1	Efficiency vs. Load and Input Voltage	21
8.2	Full Load Efficiency vs. Line.....	22
8.3	Efficiency at Low Input Voltage	23
8.4	No-Load Input Power.....	23
8.5	Load and Line Regulation.....	24
9	Waveforms	25
9.1	INN3996CQ Drain Voltage and Current, Steady-State.....	25
9.2	INN3996CQ Drain Voltage and Current, Start-up	26
9.3	Total and StackFET Drain to Source Voltage, Steady-State	27
9.4	Total and StackFET Drain to Source Voltage, Start-up.....	28
9.5	SR FET Waveforms, Steady-State	29
9.6	SR FET Waveforms, Start-up.....	30
9.7	Output Ripple Measurements.....	31
9.7.1	100% Loading Condition	32
9.7.2	75% Loading Condition	33
9.7.3	50% Loading Condition	34
9.7.4	25% Loading Condition	35
9.7.5	0% Loading Condition	36
9.8	Output Voltage Ripple (ATE)	37
9.9	Output Load Transient.....	38
9.9.1	Output Load Transient, 100% to 50% Load.....	38
9.9.2	Output Load Transient, 100% to 0% Load.....	39
9.10	FWD Waveforms During Shorted Output.....	40
10	Thermal Performance.....	41
10.1	Temperature vs. Output Power.....	42
10.2	Maximum Output Power vs. Ambient Temperature	43

11 Revision History44

Important Note:
Although this board is designed to satisfy safety isolation requirements, the engineering prototype has not been agency approved. Therefore, all testing should be performed using a DC supply to provide the DC input to the prototype board.

1 Introduction

This document is an engineering report describing a 30 VDC to 1200 VDC input, 12 V output, 15 W (maximum) power supply utilizing INN3996CQ from Power Integrations. The document contains the power supply specification, schematic, bill-of-materials and basic performance data.

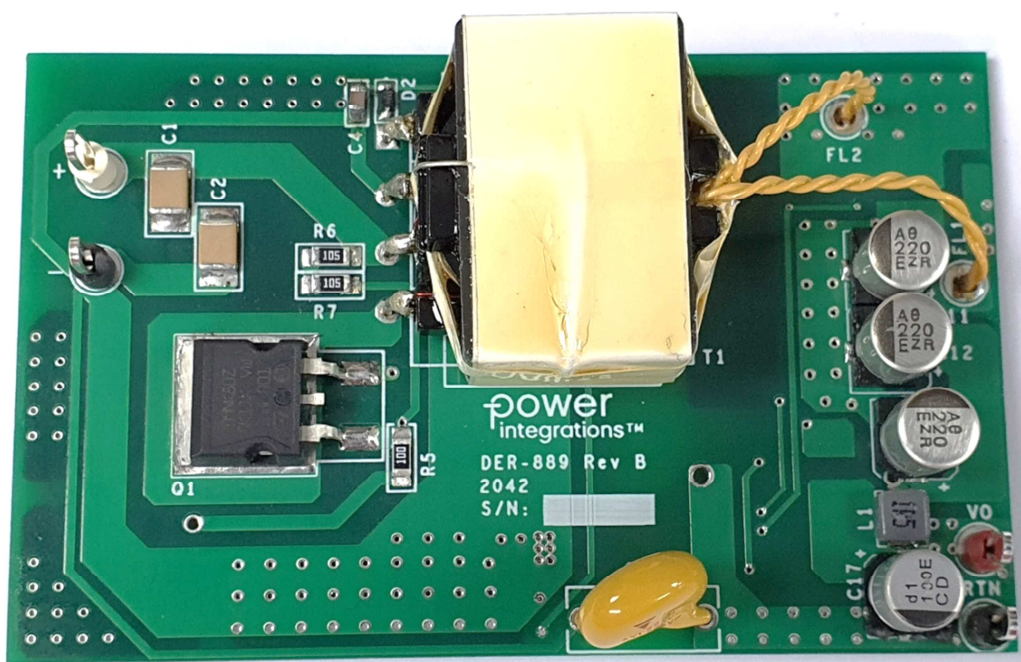


Figure 1 – Populated Circuit Board Photograph, Top.

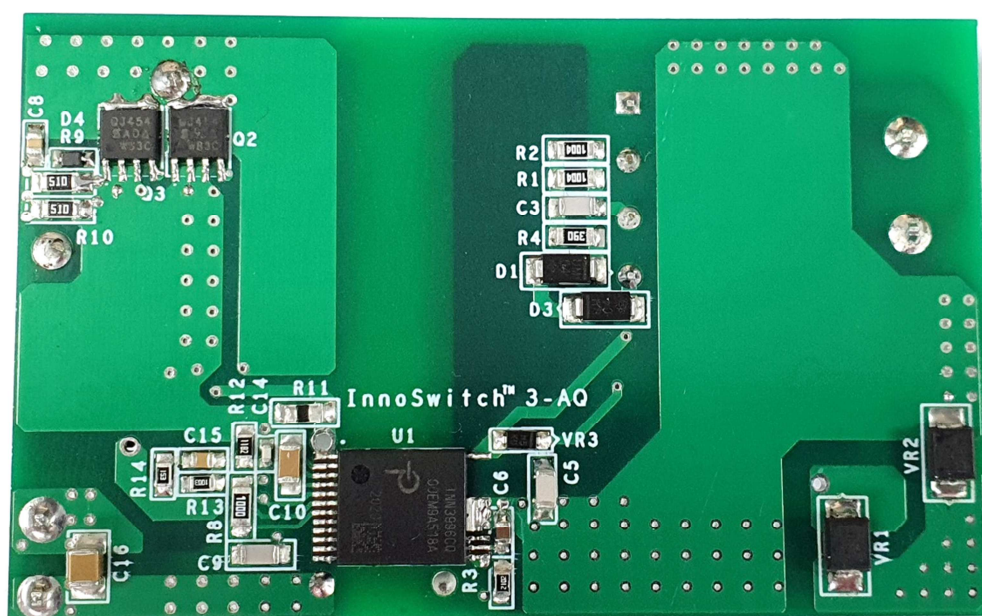


Figure 2 – Populated Circuit Board Photograph, Bottom.

2 Power Supply Specification

The table below represents the minimum acceptable performance of the design. Actual performance is listed in the results section.

Description	Symbol	Min	Typ	Max	Units	Comment
Input						
Voltage	V_{IN}	30	800	1200	VDC	For Electric Vehicle Emergency PSU.
Maximum Output Power						
	P_{OUT}			2.2	W	V_{IN} of 30 VDC, $P_{MAX} < 0.75$ W for Start-up, $P_{MAX} < 2.2$ W for Reducing Input Voltage
	P_{OUT}			15	W	V_{IN} of 60 VDC to 1200 VDC.
Output						
Output Voltage	V_{OUT}		12		V	$\pm 5\%$ ($V_{IN} > 400$ VDC).
Output Current	I_{OUT}			1.25	A	
Output Ripple Voltage	V_{RIPPLE}			300	mV	On Board.
Isolation						Meets IEC 60664-1 as a Minimum. Reinforce Better.
Ambient Temperature	T_{AMB}	-40			W	

3 Schematic

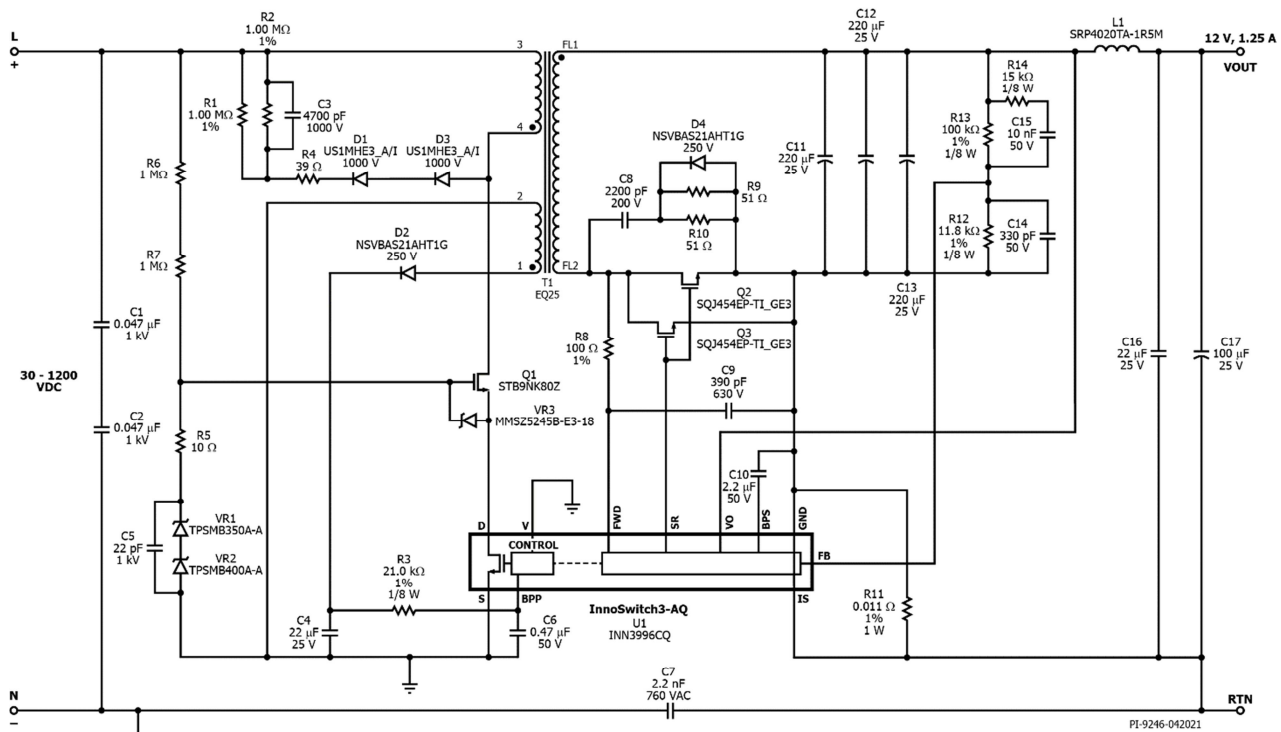


Figure 3 – Schematic.

4 Circuit Description

4.1 *INN3996CQ IC Primary*

One end of the transformer primary is connected to the DC bus. The other is connected to a high-voltage (800 V) MOSFET (Q1) that is a cascode connected to the Drain of the integrated power MOSFET inside the INN3996CQ IC (U1). In this configuration the effective Drain-Source voltage rating of the primary is 1700 V_{PK}.

High-voltage ceramic capacitors C1 and C2 are used for the decoupling capacitor for the DC input voltage, and a low cost RCD clamp formed by D1, D3, R4, R1, R2 and C3 limits the peak total drain voltage, which is the sum of STACKFET and INN3996CQ drain voltages, to about 1460 V at 1200 VDC input due to the effects of transformer leakage inductance. Capacitor C7, Y capacitor, is used to attenuate the high frequency common mode noise on the output.

The IC is self-starting, using an internal high-voltage current source to charge the BPP pin capacitor, C6, when DC input voltage is first applied. During normal operation the primary-side block is powered from an auxiliary winding on the transformer. The output of this is configured as a flyback winding which is rectified and filtered using diode D2 and capacitor C4, and fed in the BPP pin via a current limiting resistor R3.

Zener diode VR1 and VR2 clamp the maximum drain-source voltage across the INN3996CQ IC (U1) to below 800 V. Zener diode VR3 ensures that the maximum gate-source voltage of Q1 does not exceed 15 V. Resistor R6, R7, and C5 provide bias to enhance the gate of Q1 when its source is switched low by the drain of U1.

4.2 *INN3996CQ IC Secondary*

The secondary-side of the INN3996CQ IC provides output voltage, output current sensing and drive to a MOSFET providing synchronous rectification.

Output rectification for the 12 V output is provided by SR FETs Q2 and Q3. Low ESR capacitors, C11, C12, C13, C16, C17 and output inductor L1 provide filtering. RC snubber network comprising R9, R10, and C8 for Q2 and Q3 damps high frequency ringing across SR FETs, which results from leakage inductance of the transformer windings and the secondary trace inductances. The gates of Q2 and Q3 are turned on based on the winding voltage sensed via R8 and the FWD pin of the IC. In continuous conduction mode operation, the power MOSFET is turned off just prior to the secondary-side controller commanding a new switching cycle from the primary. In discontinuous mode the MOSFET is turned off when the voltage drop across the MOSFET falls below ground. Secondary-side control of the primary-side MOSFET ensures that it is never on simultaneously with the synchronous rectification MOSFET. The MOSFET drive signal is output on the SR pin. The secondary-side of the IC is self-powered from either the secondary winding forward voltage or the output voltage. The output voltage powers the

device, fed into the VO pin. It will charge the decoupling capacitor C10 via an internal regulator.

Resistors R12 and R13 form a voltage divider network that senses the output voltage. INN3996CQ IC has an internal reference of 1.265 V. Capacitor C14 provides decoupling from high frequency noise affecting power supply operation, and C15 and R14 is the feedforward network to speed up the response time to lower the output ripple. The output current is sensed by R11 with a threshold of approximately 35 mV to reduce losses. Once the current sense threshold across these resistors is exceeded, the device adjusts the number of switch pulses to maintain a fixed output current.

5 PCB Layout

Layers: 4
 Board Thickness: 0.062"
 Board Material: FR4
 Copper Weight: 2 oz
 Surface finish: LF HASL

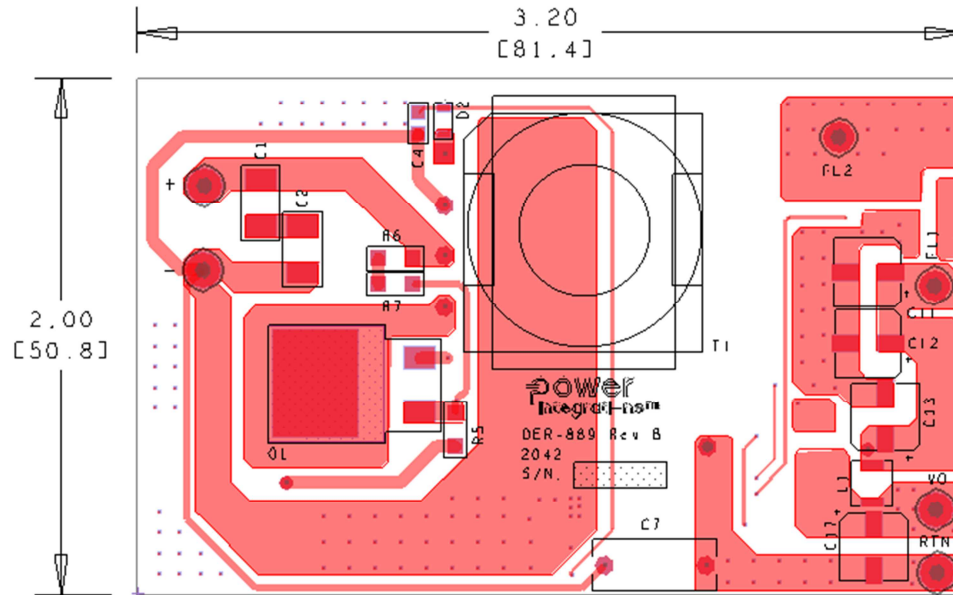


Figure 4 – Printed Circuit Board Layout (Top).

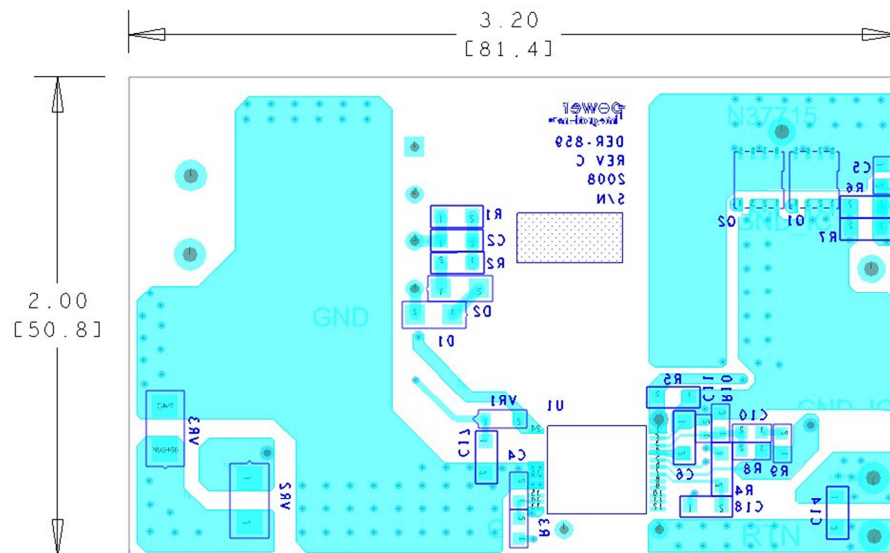


Figure 5 – Printed Circuit Board Layout (Bottom).

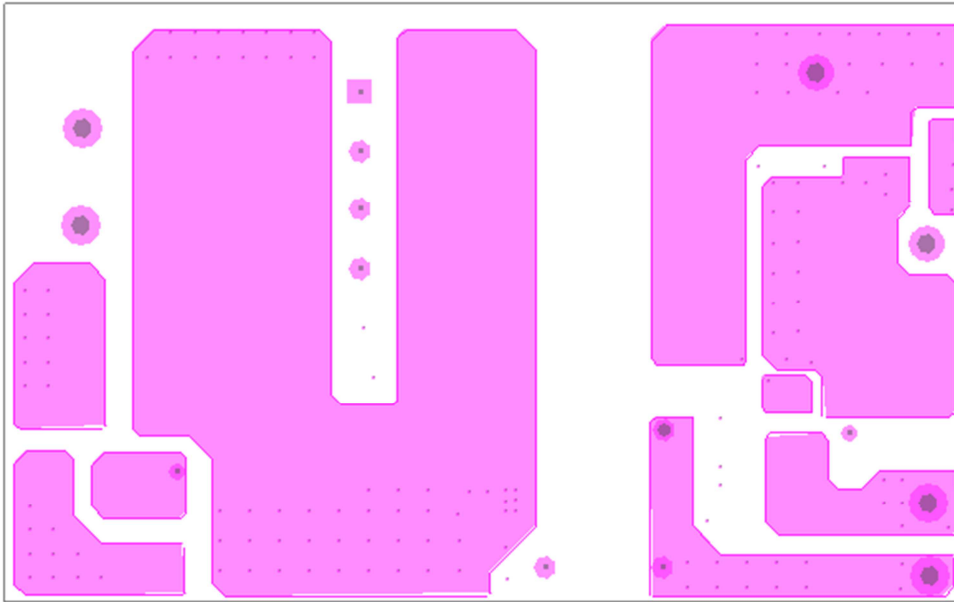


Figure 6 – Printed Circuit Board Layout (Internal layer 1).

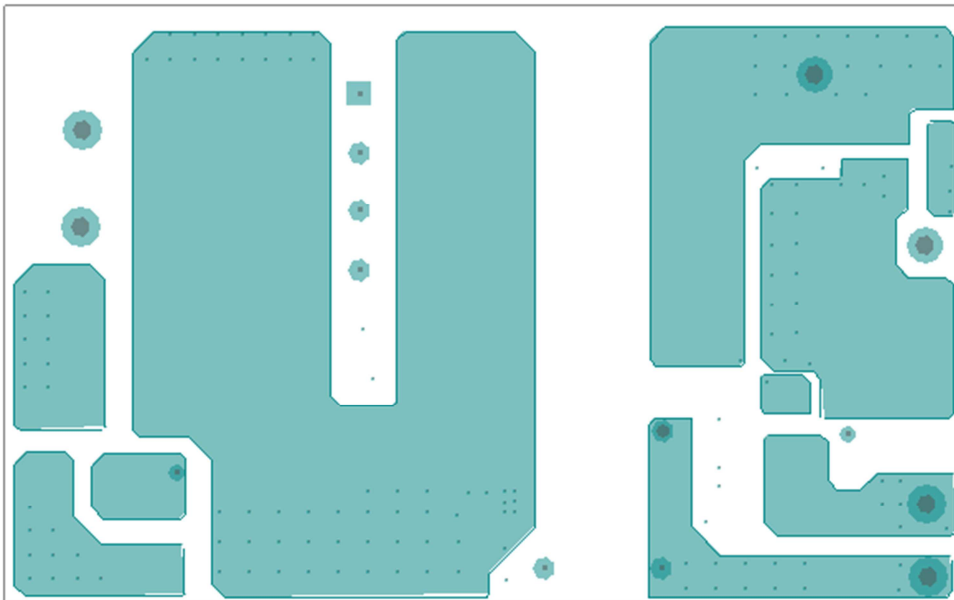


Figure 7 – Printed Circuit Board Layout (Internal layer 2).

6 Bill of Materials

Item	Qty	Ref Des	Description	Mfg Part Number	Mfg
1	2	C1 C2	0.047 μ F, $\pm 10\%$, 1000V (1kV), Ceramic, X7R, 1812	1812Y1K00473KST	Knowles Syfer
2	1	C3	4700pF, $\pm 10\%$, 1000V (1kV), Ceramic Capacitor, X7R, 1206	C1206C472KDRACAUTO	Kemet
3	1	C4	22 μ F $\pm 20\%$ 25V Ceramic X5R 0805	GRT21BR61E226ME13L	Murata
4	1	C5	22 pF, $\pm 5\%$, 1000V (1kV), Ceramic, C0G, NP0, 1206	C1206C220JDGACAUTO	Kemet
5	1	C6	0.47 μ F, $\pm 10\%$, 50 V, Ceramic, X7R, 0805, -55°C ~ 125°C	CGA4J3X7R1H474K125AB	TDK
6	1	C7	2200 pF, $\pm 20\%$, 760VAC, Ceramic Y5U (E) Radial, Disc	AY1222M47Y5UC63L0	Vishay
7	1	C8	2200 pF, $\pm 10\%$, 200V, Ceramic, X7R, 0805	08052C222K4T2A	AVX
8	1	C9	390 pF $\pm 5\%$ 630VDC, Ceramic C0G, NP0 1206	GCM31A5C2J391JX01D	Murata
9	1	C10	2.2 μ F, $\pm 10\%$, 50 V, Ceramic, X7R, Bypass, Decoupling, 1206	C1206C225K5RACAUTO7210	KEMET Murata
10	3	C11 C12 C13	220 μ F, 25 V, Electrolytic, 0.260" L x 0.260" W (6.60mm x 6.60mm) x 0.315" H (8.00mm), SMD	EMZR250ARA221MF80G	United Chemi-Con
11	1	C14	330 pF, $\pm 5\%$, 50 V, Ceramic, C0G, NP0, 0603	C0603C331J5GACAUTO	KEMET
12	1	C15	10 nF, $\pm 10\%$, 50 V, Ceramic, X7R, 0805	08055C103K4Z2A	AVX
13	1	C16	22 μ F $\pm 20\%$, 25 V, Ceramic, X7R, 1210	CGA6P3X7R1E226M250AB	TDK
14	1	C17	100 μ F, $\pm 20\%$, 25 V, Z=320 m Ω , Electrolytic, 0.260" L x 0.260" W (6.60 mm x 6.60 mm) x 0.315" H (8.00mm), SMD	UCD1E101MCL1GS	Nichicon
15	2	D1 D3	Diode Standard 1000 V 1 A SMT DO-214AC (SMA)	US1MHE3_A/I	Vishay
16	2	D2 D4	Diode, General Purpose, 250 V, 200 mA, SC-76, SOD-323	NSVBAS21AHT1G	ON Semi
17	1	L1	1.5 μ H, $\pm 20\%$, Shielded, Wirewound, Inductor, 4.5 A, 42 m Ω Max, Automotive, AEC-Q200, 2-SMD	SRP4020TA-1R5M	Bourns
18	1	Q1	N-Channel 800V 5.2A (Tc) 125 W (Tc) SMT D2PAK	STB9NK80Z	ST Micro
19	2	Q2 Q3	MOSFET, N-Channel, 200 V, 13 A (Tc), 68W (Tc), Automotive, AEC-Q101, PowerPAK® SO-8, PowerPAK SO-8	SQJ454EP-T1_GE3	Vishay
20	2	R1 R2	RES, 1.00 M Ω , 1%, 1/4 W, Thick Film, 1206	ERJ-8ENF1004V	Panasonic
21	1	R3	RES, 21.0 k Ω , 1%, 1/8 W, Thick Film, 0805	ERJ-6ENF2102V	Panasonic
22	1	R4	RES, 39 Ω , 5%, 1/4 W, Thick Film, 1206	ERJ-8GEYJ390V	Panasonic
23	1	R5	RES, 10 Ω , 5%, 1/4 W, Thick Film, 1206	ERJ-8GEYJ100V	Panasonic
24	2	R6 R7	RES, 1.0 M Ω , 5%, 1/4 W, Thick Film, 1206	ERJ-8GEYJ105V	Panasonic
25	1	R8	RES, 100 Ω , 1%, 1/4 W, Thick Film, 1206	ERJ-8ENF1000V	Panasonic
26	2	R9 R10	RES, 51 Ω , 5%, 1/4 W, Thick Film, 1206	ERJ-8GEYJ510V	Panasonic
27	1	R11	0.011 Ω , $\pm 1\%$, ± 75 ppm/°C, 1 W, 1206, Automotive AEC-Q200, Current Sense, -55°C ~ 155°C	ERJ-8CWFR011V	Panasonic
28	1	R12	RES, 11.8 k Ω , 1%, 1/8 W, Thick Film, 0805	ERJ-6ENF1182V	Panasonic
29	1	R13	RES, 100 k Ω , 1%, 1/8 W, Thick Film, 0805	ERJ-6ENF1003V	Panasonic
30	1	R14	RES, 15 k Ω , 5%, 1/8 W, Thick Film, 0805	ERJ-6GEYJ153V	Panasonic
31	1	T1	Bobbin, EQ25, 4 pins, 4pri, 0sec	EQ-2506	Shen Zhen Xin Yu Jia Tech
32	1	U1	InnoSwitch3-AQ, InSOP-24D	INN3996CQ	Power Integrations
33	1	VR1	TVS DIODE, 482 V Clamp, 1.3A Ipp, SMT, DO-214AA (SMBJ)	TPSMB350A-A	Littlefuse
34	1	VR2	TVS DIODE, 548 V Clamp, 1.1A Ipp, SMT, DO-214AA (SMBJ)	TPSMB400A-A	Littlefuse
35	1	VR3	Zener Diode, 15 V, 500 mW, $\pm 5\%$, SMT, SOD-123	MMSZ5245B-E3-18	Vishay

7 Transformer Design

7.1 Electrical Diagram

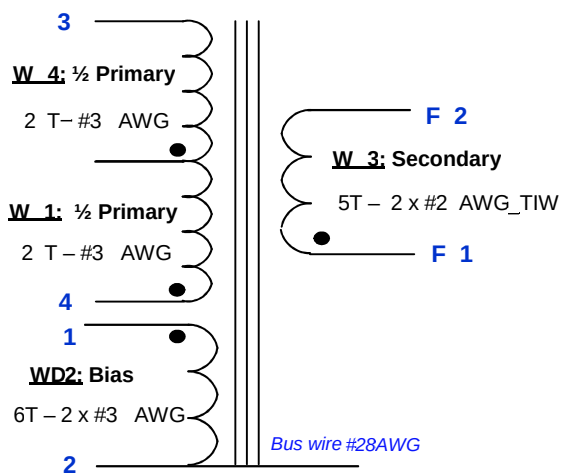


Figure 8 – Electrical Diagram.

7.2 Electrical Specification

Parameter	Condition	Spec.
Nominal Primary Inductance	Measured at 1 V _{PK-PK} , 100 kHz switching frequency, between pin 3 and 4, with all other windings open.	1187 μ H $\pm$ 5%
Resonant Frequency	Between pin 3 and 4, other windings open.	1,200 kHz (Min.)
Primary Leakage Inductance	Between pin 3 and 4, with pins: FL1-FL2 shorted.	7.0 μ H (Max.)

7.3 Transformer Build Diagram

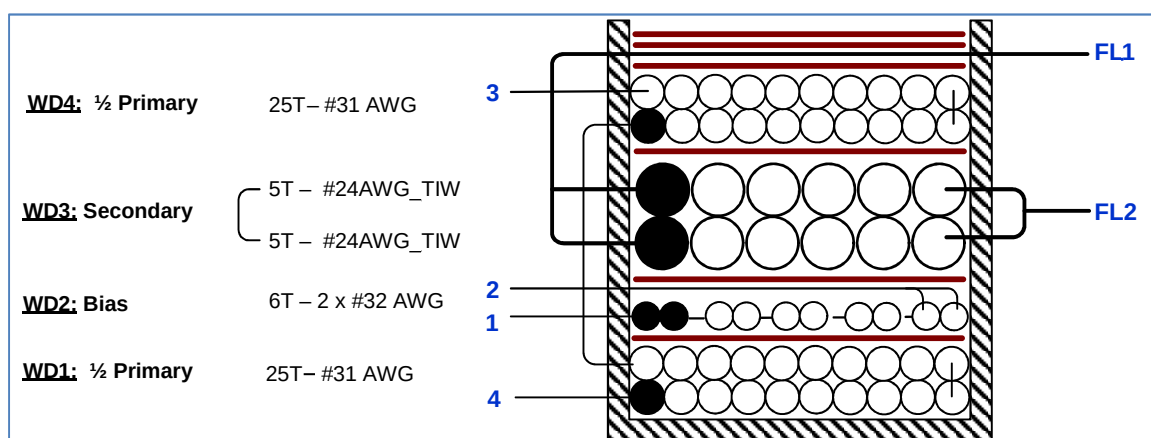


Figure 9 – Transformer Build Diagram.



7.4 **Material List**




Item	Description
[1]	Core: EQ27, ACP-95.
[2]	Bobbin: EQ2506 – Vertical – 4pins (4/0); PI#: 25-01095-00.
[3]	Magnet Wire: #31 AWG, Double Coated.
[4]	Magnet Wire: #32 AWG, Double Coated.
[5]	Magnet Wire: #24 AWG, Triple Insulated Wire.
[6]	Bus Wire: #28 AWG, Alpha Wire, Tinned Copper.
[7]	Tape: 3M 13450-F, Polyester Film, 1 mil Thickness, 4.25 mm Width.
[8]	Tape: 3M 13450-F, Polyester Film, 1 mil Thickness, 27.5 mm x 52 mm.
[9]	Varnish: Dolph BC-359.




7.5 **Transformer Instruction**




Winding Preparation	Make 2 slots with 2 mm width on flanges of secondary side of bobbin Item [2], (see illustration below). Position the bobbin on the mandrel such that the primary side of the bobbin is on the left side. Winding direction is clock-wise direction for forward direction.
WD1 1st Primary	Start at pin 4, wind 25 turns of wire Item [3] in 2 layers, with tight tension, from left to right and right to left. At the last turn, leave this wire with enough length for WD4 – 2 nd Primary.
Insulation	1 layer of tape Item [7].
WD2: Bias	Start at pin1, wind 6 bifilar turns of wire Item [4] from left to right, spread wires evenly on the bobbin. At the last turn bring the wires back to the left and terminate at pin 2.
Insulation	1 layer of tape Item [7].
WD3 Secondary	Start at left slot of secondary side of bobbin, use wire Item [5] leaving ~ 1", mark as FL1, and wind 5 turns with tight tension. At the last turn, exit the wire at the right slot, also leaving ~ 1" and mark as FL2. Repeat same winding above and on top, also start as FL1 and end FL2.
Insulation	1 layer of tape Item [7].
WD4 2nd Primary	Using wire floating from WD1, continue winding 25 turns in 2 layers, and terminate at pin 3.
Insulation	Place 1 layer of tape Item [7], bring 2 wires floating FL1 from Secondary – WD3 to right slot and continue placing another 2 layers of tape to secure these wires and all the windings.
Finish Assembly	Gap core halves to get 1187 μ H. Use 50 mm of bus wire Item [6], solder to pin 2 then lean along core halves and secure with tape. Varnish with Item [9]. Places 2 layers of tape Item [8] at bottom of transformer, wrap up to the body, and 1 layer of tape Item [7] around the transformer, (see illustration below).



7.6 Winding Illustrations

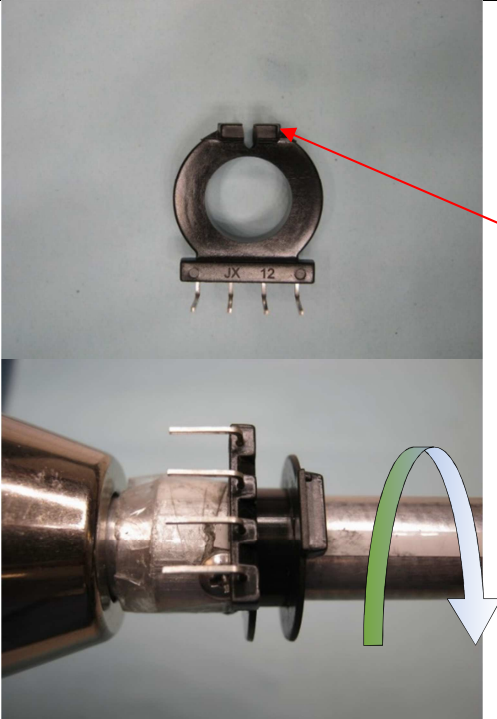
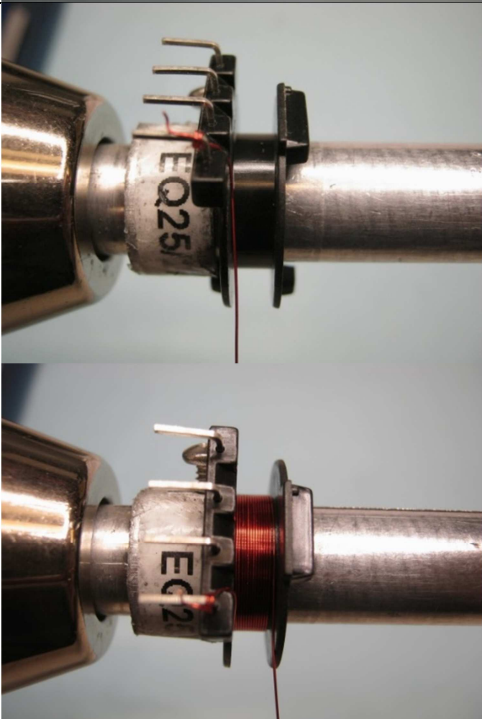
Winding Preparation		Make 2 slots with 2 mm width on flanges of secondary side of bobbin Item [2], (see illustration beside). Position the bobbin on the mandrel such that the primary side of the bobbin is on the left side. Winding direction is clock-wise direction for forward direction.
WD1 1st Primary		Start at pin 4, wind 25 turns of wire Item [3] in 2 layers, with tight tension, from left to right and right to left. At the last turn, leave this wire with enough length for WD4 – 2nd Primary.

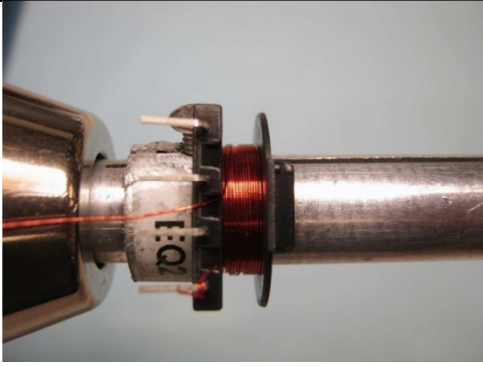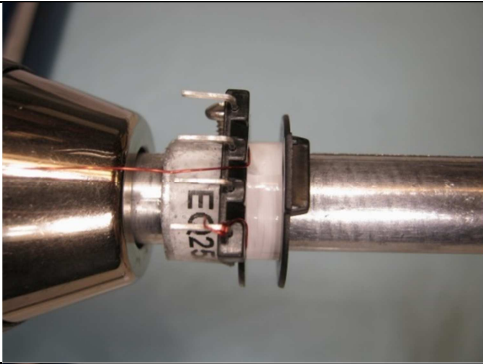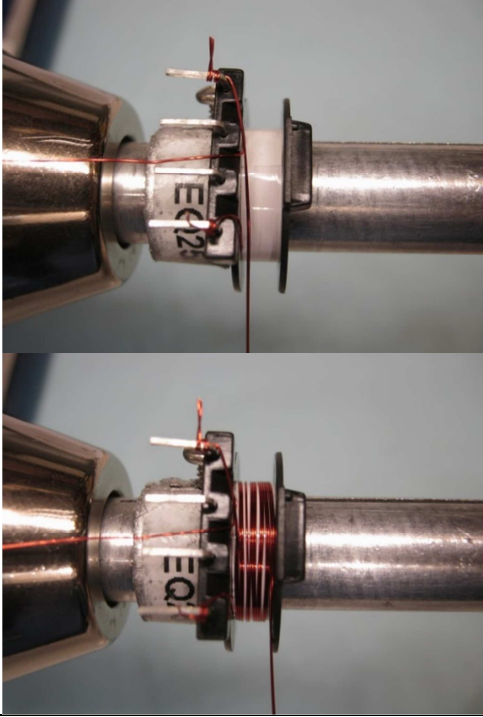
		
Insulation		1 layer of tape Item [7].
WD2: Bias		Start at pin1, wind 6 bifilar turns of wire Item [4] from left to right, spread wires evenly on the bobbin. At the last turn bring the wires back to the left and terminate at pin 2.

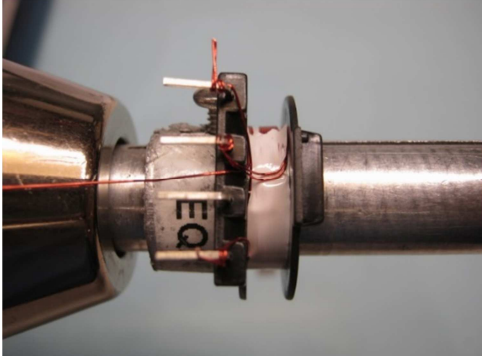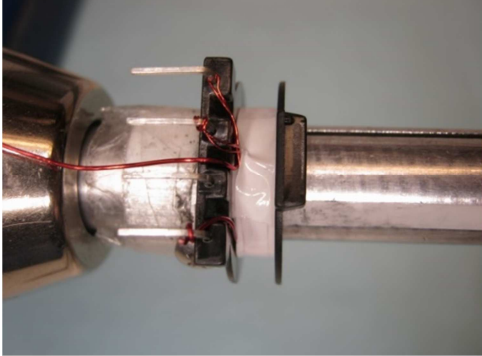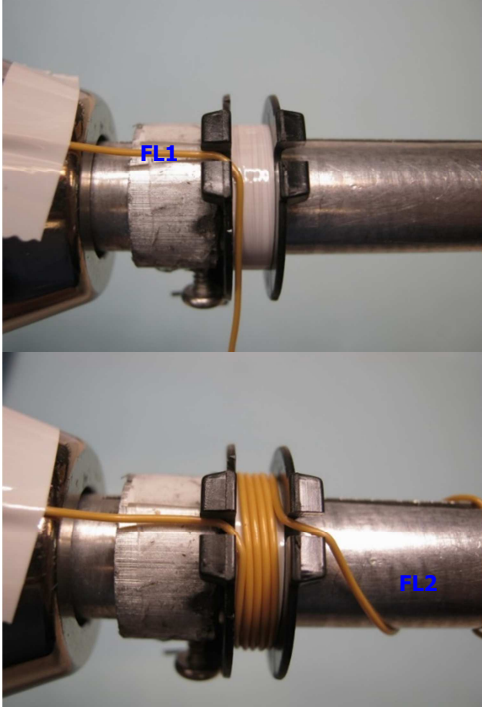		
Insulation		1 layer of tape item [7].
WD3 Secondary		Start at left slot of secondary side of bobbin, use wire Item [5] leaving ~ 1", mark as FL1, and wind 5 turns with tight tension. At the last turn, exit the wire at the right slot, also leaving ~ 1" and mark as FL2. Repeat same winding above and on top, also start as FL1 and end FL2.

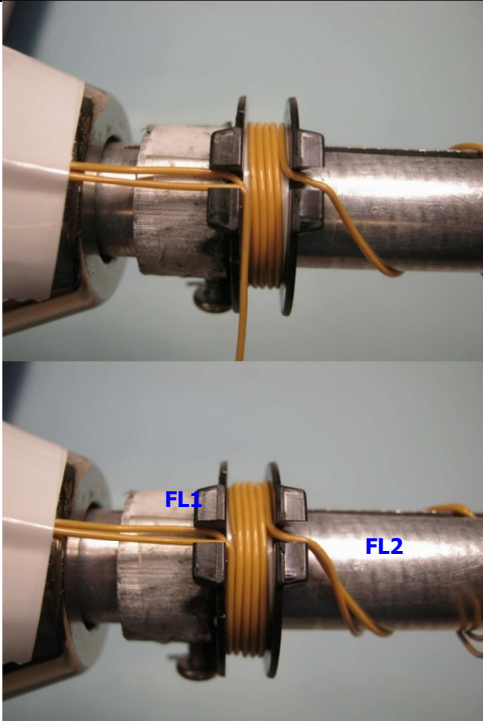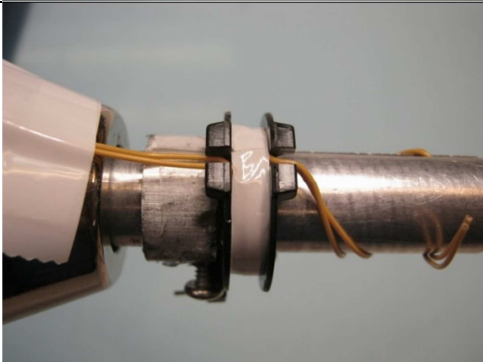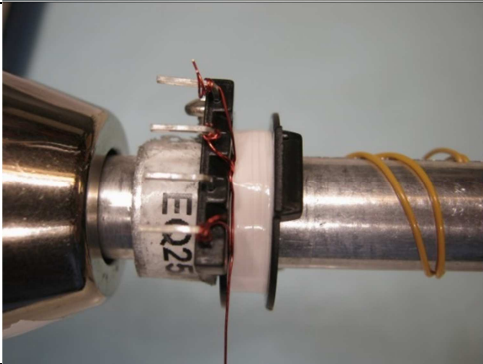		
Insulation		1 layer of tape Item [7].
WD4 2nd Primary		Using wire floating from WD1, continue winding 25 turns in 2 layers, and terminate at pin 3.

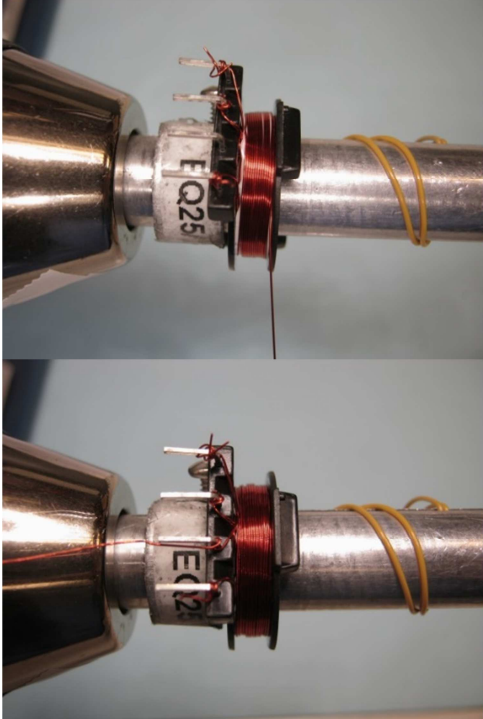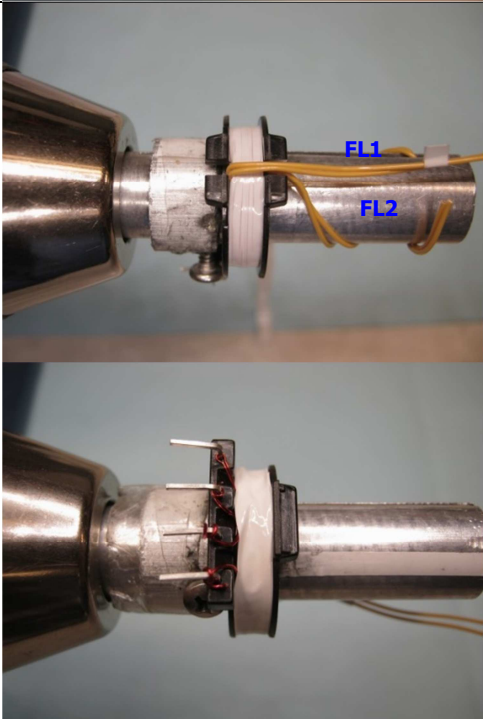		
Insulation		Place 1 layer of tape Item [7], bring 2 wires floating FL1 from Secondary – WD3 to right slot and continue placing another 2 layers of tape to secure these wires and all the windings.

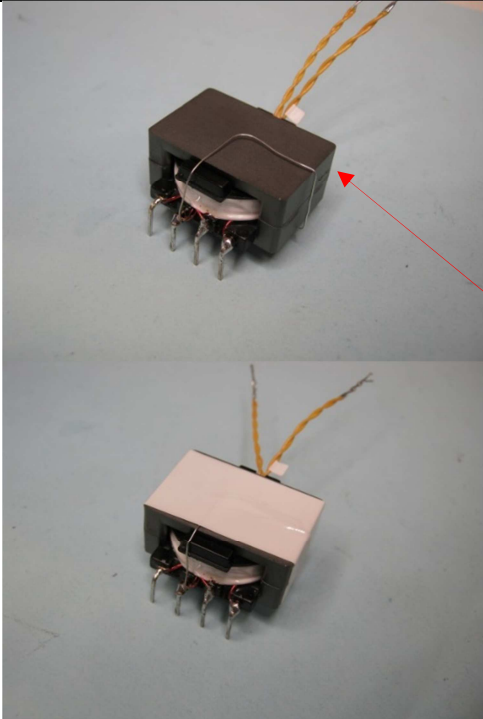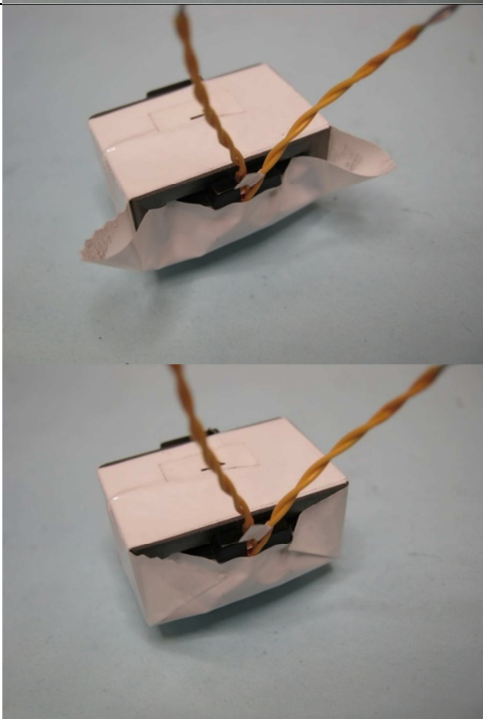Finish		Gap core halves to get 1187 μH. Use 50 mm of bus wire Item [6], solder to pin 2 then lean along core halves and secure with tape. Varnish with Item [9].
Finish (Cont'd)		Places 2 layers of tape Item [8] at bottom of transformer, wrap up to the body, and 1 layer of tape Item [7] around the transformer, (see illustration below).

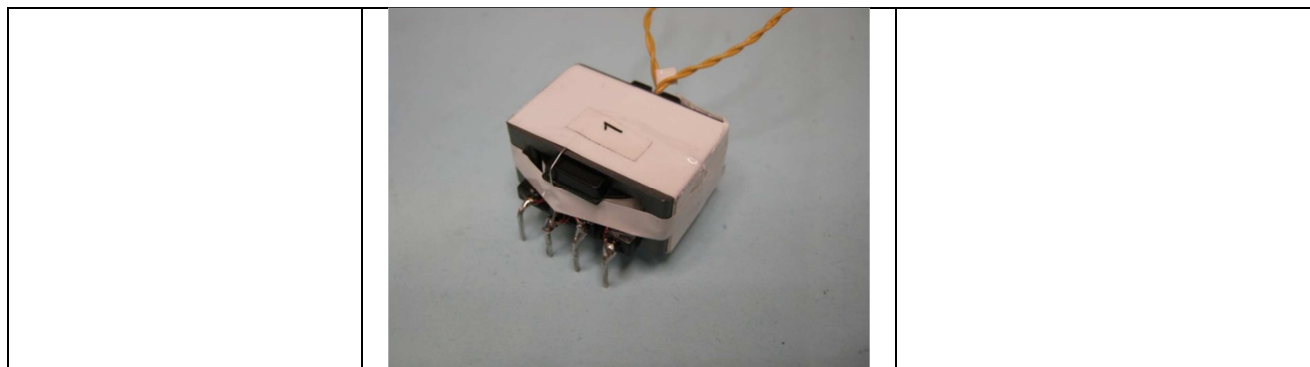

8 Performance Data

All measurements performed with room ambient temperature. Measured at PCB output terminal.

8.1 Efficiency vs. Load and Input Voltage

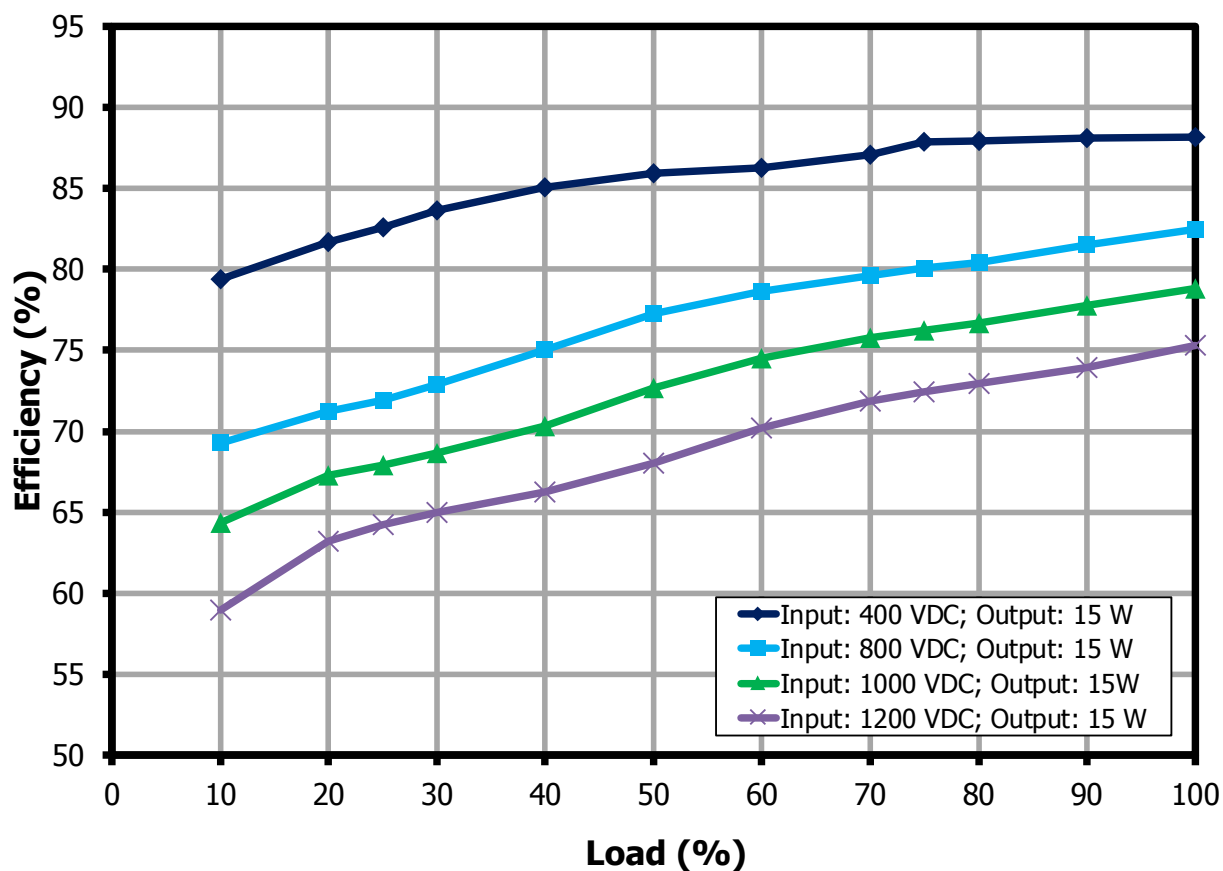


Figure 10 – Efficiency vs. Load and Input Voltage, Room Temperature.

8.2 Full Load Efficiency vs. Line

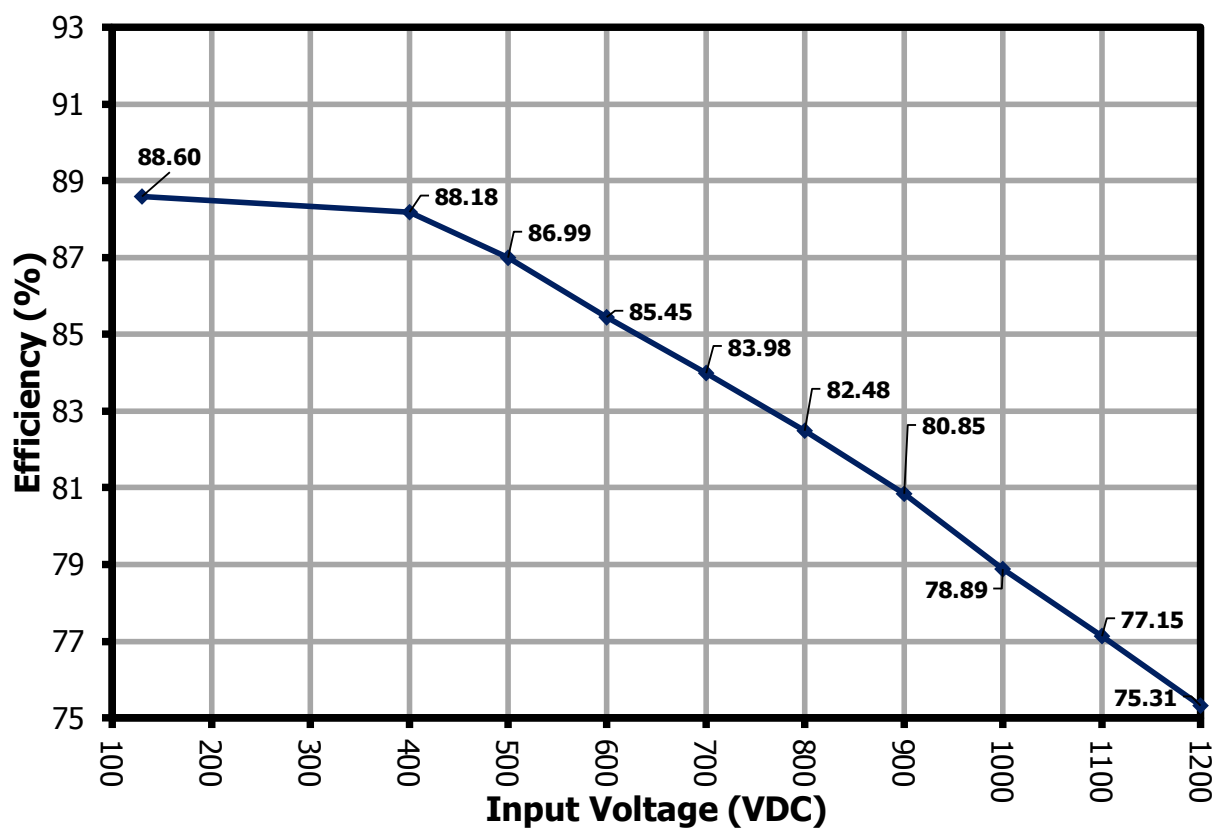


Figure 11 – Efficiency vs. Line (VDC), Room Temperature.

8.3 Efficiency at Low Input Voltage

V _{IN} (VDC)	P _{IN} (W)	V _{OUT} (V)	I _{OUT} (A)	P _{OUT} (W)	Efficiency (%)
130	16.97	12.03	1.25	15.03	88.60
100	17.14	12	1.25	14.99	87.45
90	17.32	12.01	1.25	15.00	86.63
60	17.14	11.53	1.25	14.41	84.29
40	9.98	11.42	0.70	7.99	80.13
35	8.02	11.40	0.55	6.27	78.10
30	2.84	11.59	0.19	2.20	77.38

Note: 2 W Load at 30 VDC Input during power down only.

8.4 No-Load Input Power

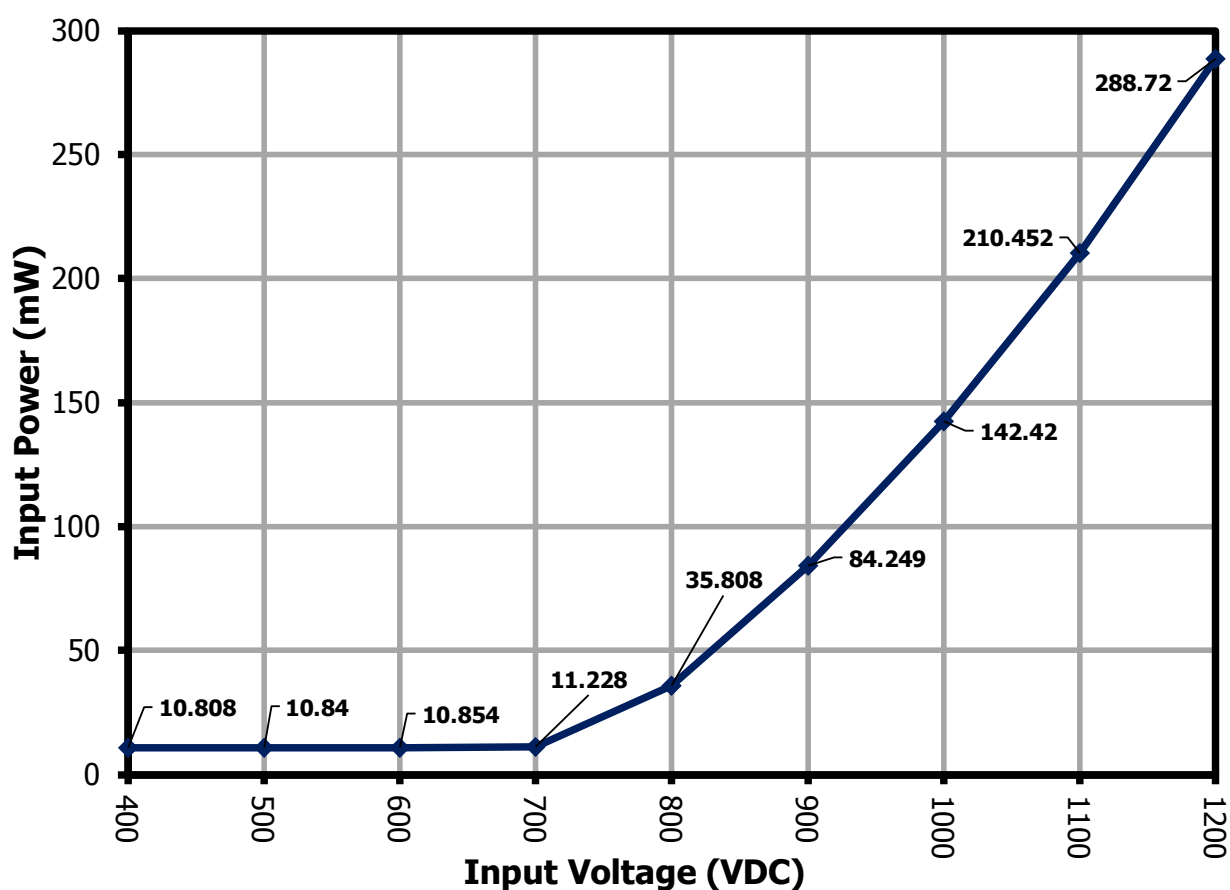


Figure 12 – No-Load Input Power, Room Temperature.

8.5 Load and Line Regulation

Measurements taken at 0% to 100% of rated load

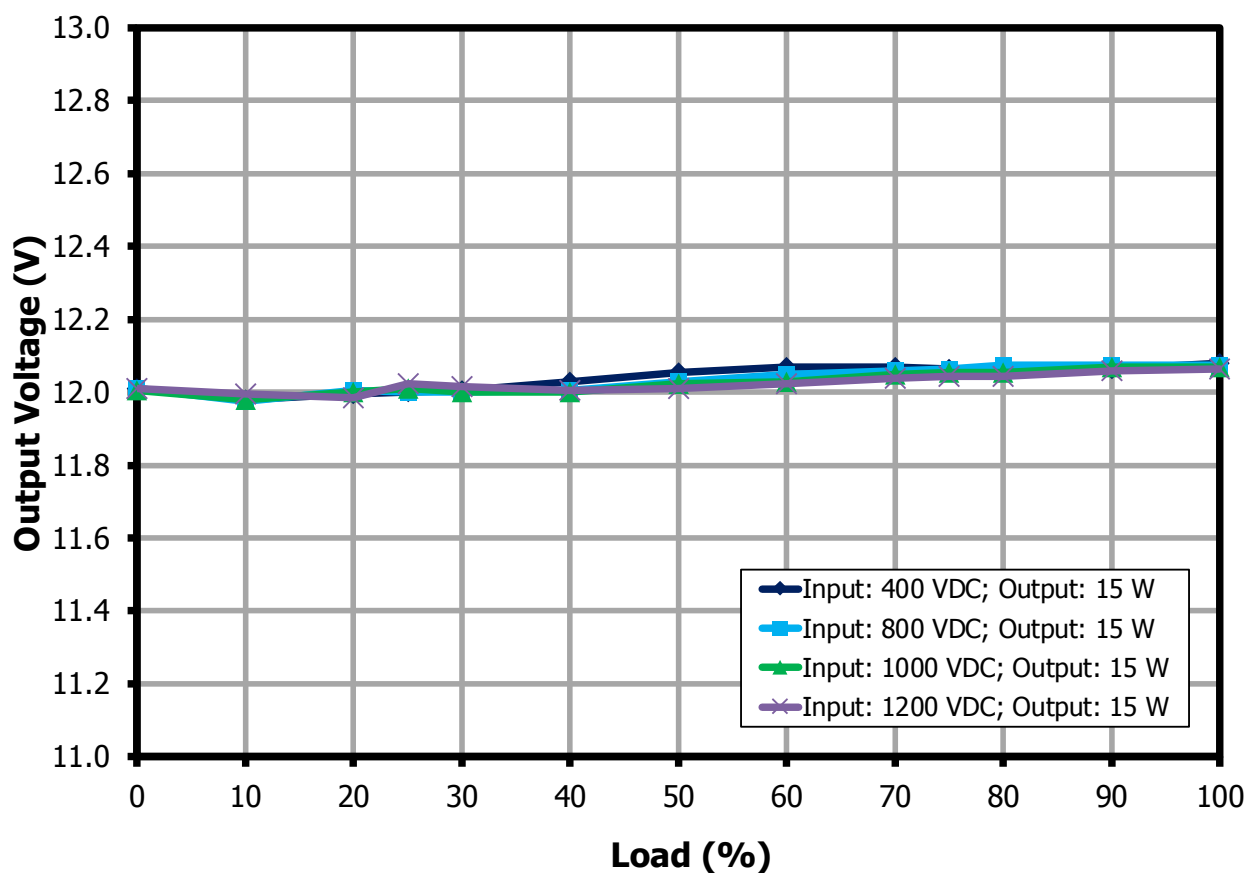


Figure 13 – Output Voltage vs. Output Current and Input Voltage (VDC), Room Temperature.

9 Waveforms

9.1 *INN3996CQ* Drain Voltage and Current, Steady-State

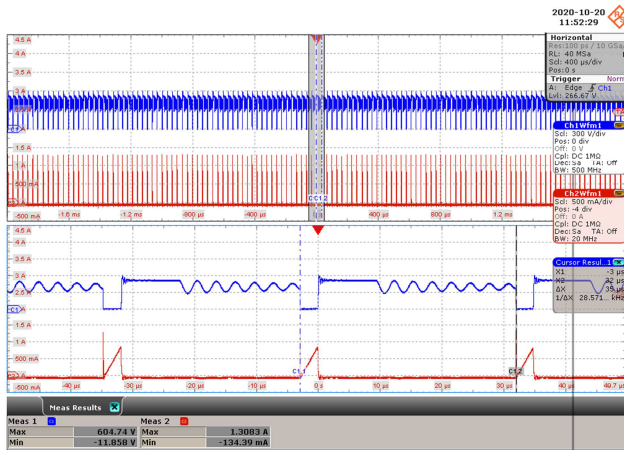


Figure 14 – Drain Voltage and Current Waveforms.
 $V_{IN} = 400 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 $V_{DS(\text{MAX})} = 604 \text{ V}$.
 Upper: V_{DRAIN} , 300 V, 400 $\mu\text{s}/\text{div}$.
 Lower: I_{DRAIN} , 500 mA, 400 $\mu\text{s}/\text{div}$.
 Bottom Half: Zoom @ 10 $\mu\text{s}/\text{div}$.

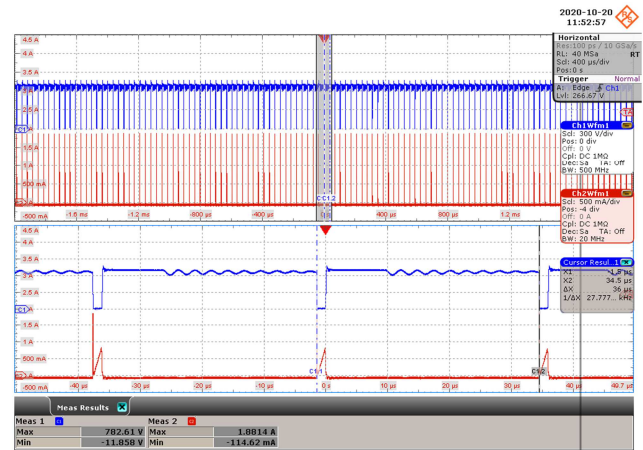


Figure 15 – Drain Voltage and Current Waveforms.
 $V_{IN} = 800 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 $V_{DS(\text{MAX})} = 782 \text{ V}$.
 Upper: V_{DRAIN} , 300 V, 400 $\mu\text{s}/\text{div}$.
 Lower: I_{DRAIN} , 500 mA, 400 $\mu\text{s}/\text{div}$.
 Bottom Half: Zoom @ 10 $\mu\text{s}/\text{div}$.

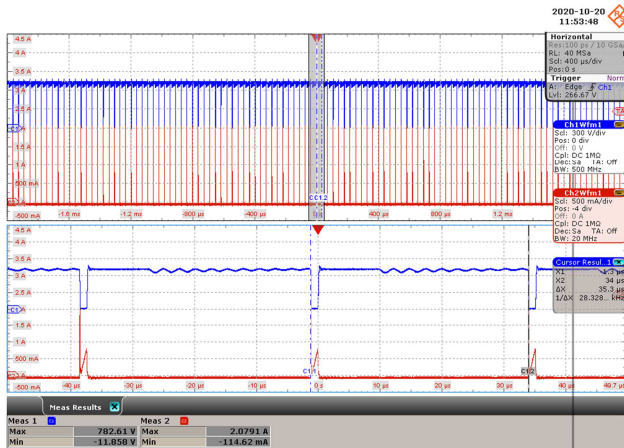


Figure 16 – Drain Voltage and Current Waveforms.
 $V_{IN} = 1000 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 $V_{DS(\text{MAX})} = 782 \text{ V}$.
 Upper: V_{DRAIN} , 300 V, 400 $\mu\text{s}/\text{div}$.
 Lower: I_{DRAIN} , 500 mA, 400 $\mu\text{s}/\text{div}$.
 Bottom Half: Zoom @ 10 $\mu\text{s}/\text{div}$.

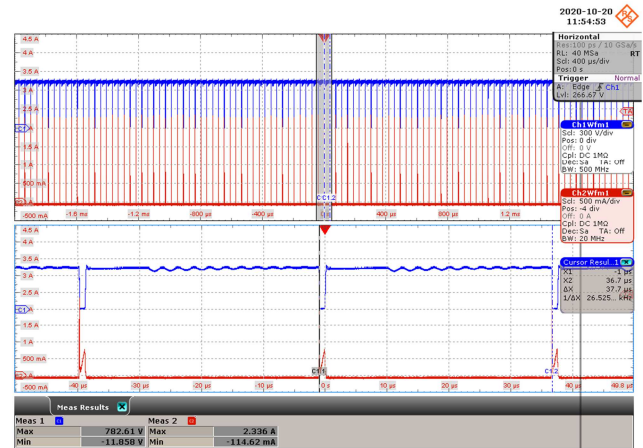


Figure 17 – Drain Voltage and Current Waveforms.
 $V_{IN} = 1200 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 $V_{DS(\text{MAX})} = 782 \text{ V}$.
 Upper: V_{DRAIN} , 300 V, 400 $\mu\text{s}/\text{div}$.
 Lower: I_{DRAIN} , 500 mA, 400 $\mu\text{s}/\text{div}$.
 Bottom Half: Zoom @ 10 $\mu\text{s}/\text{div}$.

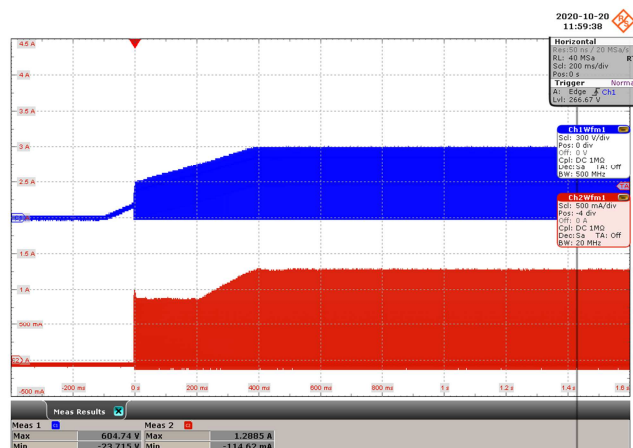
9.2 **INN3996CQ Drain Voltage and Current, Start-up**

Figure 18 – Drain Voltage and Current Waveforms.
 $V_{IN} = 400 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 $V_{DS(MAX)} = 604 \text{ V}$.
 Upper: V_{DRAIN} , 300 V, 200 ms / div.
 Lower: I_{DRAIN} , 500 mA, 200 ms / div.

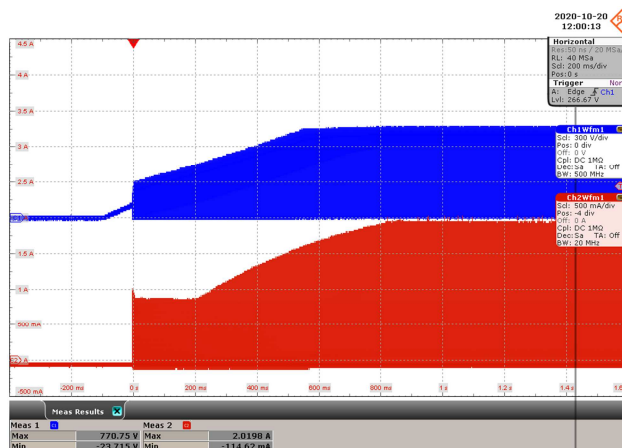


Figure 19 – Drain Voltage and Current Waveforms.
 $V_{IN} = 800 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 $V_{DS(MAX)} = 770 \text{ V}$.
 Upper: V_{DRAIN} , 300 V, 200 ms / div.
 Lower: I_{DRAIN} , 500 mA, 200 ms / div.

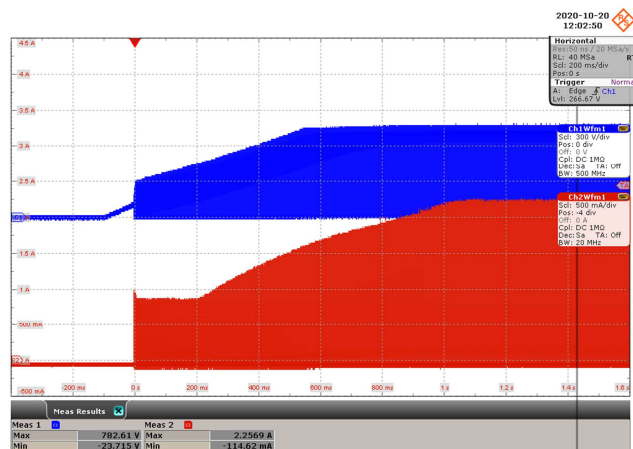


Figure 20 – Drain Voltage and Current Waveforms.
 $V_{IN} = 1000 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 $V_{DS(MAX)} = 782 \text{ V}$.
 Upper: V_{DRAIN} , 300 V, 200 ms / div.
 Lower: I_{DRAIN} , 500 mA, 200 ms / div.

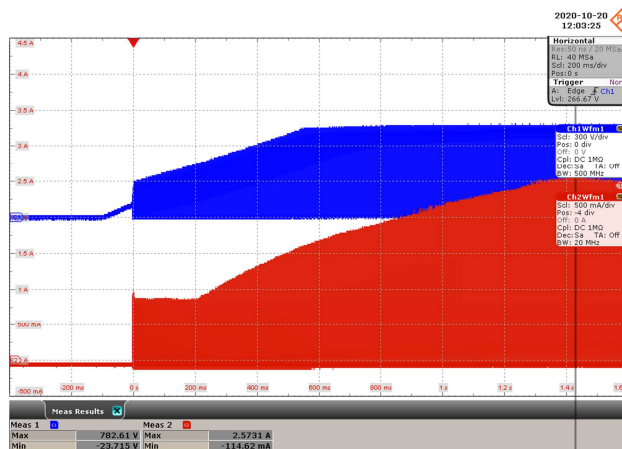


Figure 21 – Drain Voltage and Current Waveforms.
 $V_{IN} = 1200 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 $V_{DS(MAX)} = 782 \text{ V}$.
 Upper: V_{DRAIN} , 300 V, 200 ms / div.
 Lower: I_{DRAIN} , 500 mA, 200 ms / div.

9.3 Total and StackFET Drain to Source Voltage, Steady-State

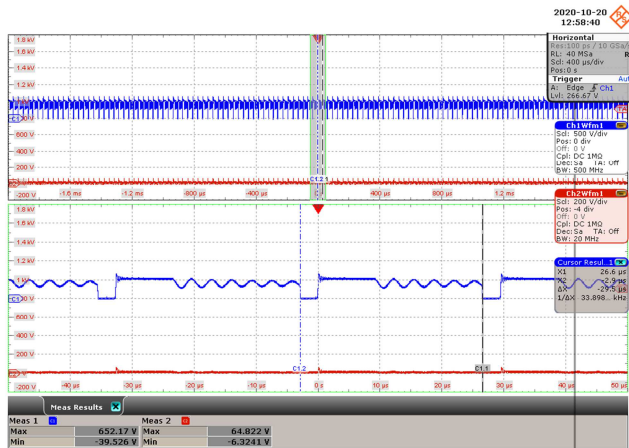


Figure 22 – Total and STACKFET Drain to Source Voltage Waveforms.
 $V_{IN} = 400 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 $V_{STACKFET(MAX)} = 65 \text{ V}$, $V_{DS_TOTAL(MAX)} = 652 \text{ V}$.
 Upper: V_{TOTAL} , 500 V, 400 μs / div.
 Lower: $V_{STACKFET}$, 200 V, 400 μs / div.
 Bottom Half: Zoom @ 10 μs / div.

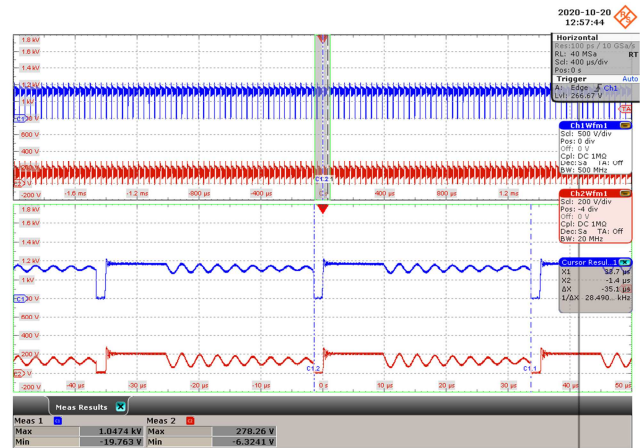


Figure 23 – Total and STACKFET Drain to Source Voltage Waveforms.
 $V_{IN} = 800 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 $V_{STACKFET(MAX)} = 278 \text{ V}$, $V_{TOTAL(MAX)} = 1047 \text{ V}$.
 Upper: V_{TOTAL} , 500 V, 400 μs / div.
 Lower: $V_{STACKFET}$, 200 V, 400 μs / div.
 Bottom Half: Zoom @ 10 μs / div.

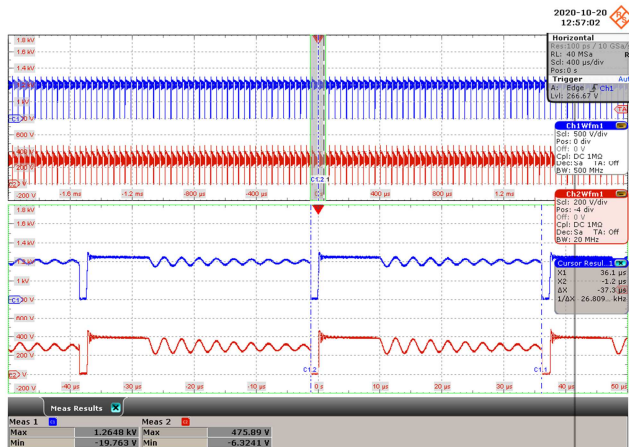


Figure 24 – Total and STACKFET Drain to Source Voltage Waveforms.
 $V_{IN} = 1000 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 $V_{STACKFET(MAX)} = 476 \text{ V}$, $V_{TOTAL(MAX)} = 1265 \text{ V}$.
 Upper: V_{TOTAL} , 500 V, 400 μs / div.
 Lower: $V_{STACKFET}$, 200 V, 400 μs / div.
 Bottom Half: Zoom @ 10 μs / div.

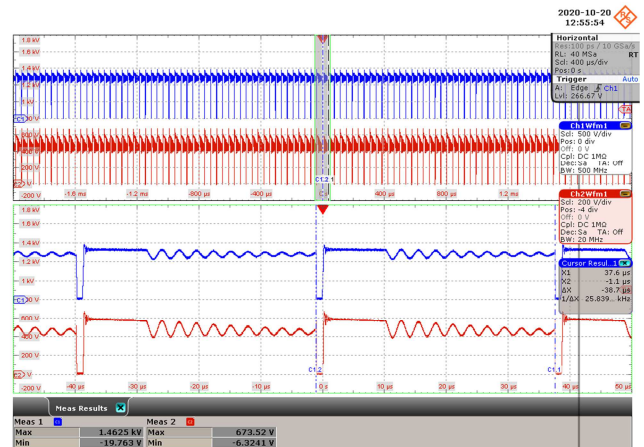


Figure 25 – Total and STACKFET Drain to Source Voltage Waveforms.
 $V_{IN} = 1200 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 $V_{STACKFET(MAX)} = 674 \text{ V}$, $V_{TOTAL(MAX)} = 1463 \text{ V}$.
 Upper: V_{TOTAL} , 500 V, 400 μs / div.
 Lower: $V_{STACKFET}$, 200 V, 400 μs / div.
 Bottom Half: Zoom @ 10 μs / div.

9.4 Total and StackFET Drain to Source Voltage, Start-up

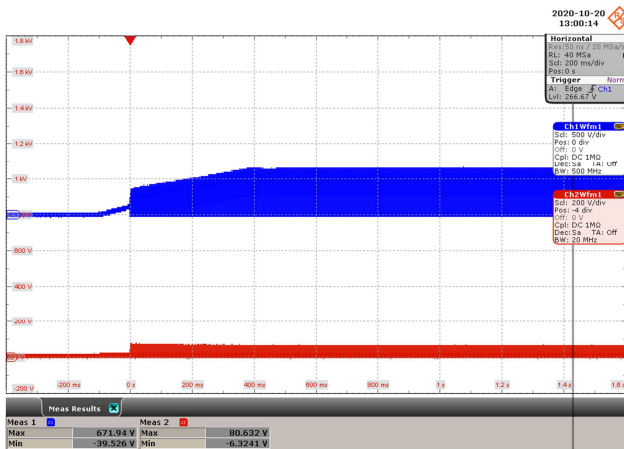


Figure 26 – Total and STACKFET Drain to Source Voltage Waveforms.
 $V_{IN} = 400 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 $V_{STACKFET(MAX)} = 81 \text{ V}$, $V_{DS_TOTAL(MAX)} = 672 \text{ V}$.
 Upper: V_{TOTAL} , 500 V, 200 ms / div.
 Lower: $V_{STACKFET}$, 200 V, 200 ms / div.

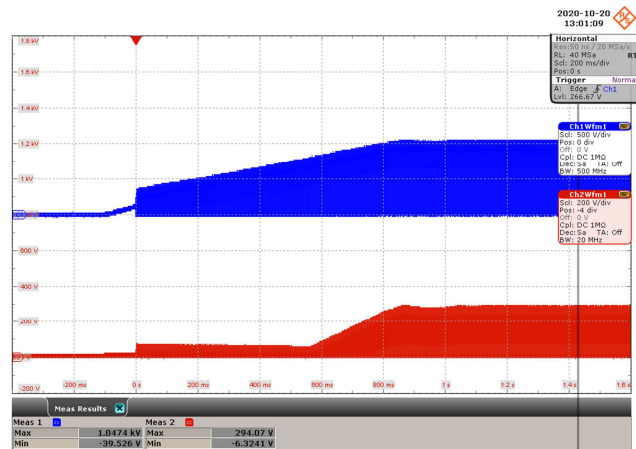


Figure 27 – Total and STACKFET Drain to Source Voltage Waveforms.
 $V_{IN} = 800 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 $V_{STACKFET(MAX)} = 294 \text{ V}$, $V_{TOTAL(MAX)} = 1047 \text{ V}$.
 Upper: V_{TOTAL} , 500 V, 200 ms / div.
 Lower: $V_{STACKFET}$, 200 V, 200 ms / div.

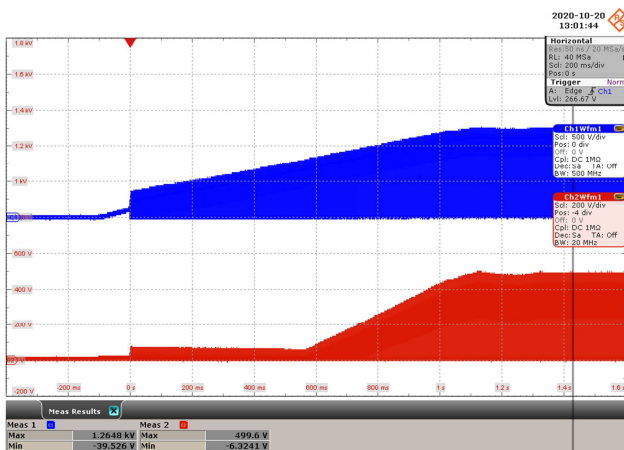


Figure 28 – Total and STACKFET Drain to Source Voltage Waveforms.
 $V_{IN} = 1000 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 $V_{STACKFET(MAX)} = 500 \text{ V}$, $V_{TOTAL(MAX)} = 1265 \text{ V}$.
 Upper: V_{TOTAL} , 500 V, 200 ms / div.
 Lower: $V_{STACKFET}$, 200 V, 200 ms / div.

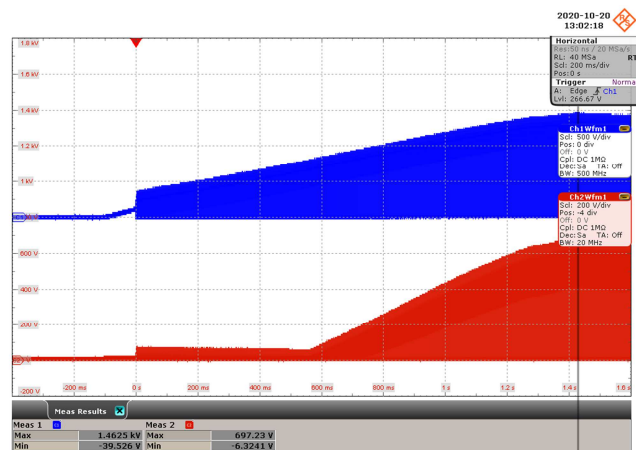


Figure 29 – Total and STACKFET Drain to Source Voltage Waveforms.
 $V_{IN} = 1200 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 $V_{STACKFET(MAX)} = 697 \text{ V}$, $V_{TOTAL(MAX)} = 1463 \text{ V}$.
 Upper: V_{TOTAL} , 500 V, 200 ms / div.
 Lower: $V_{STACKFET}$, 200 V, 200 ms / div.

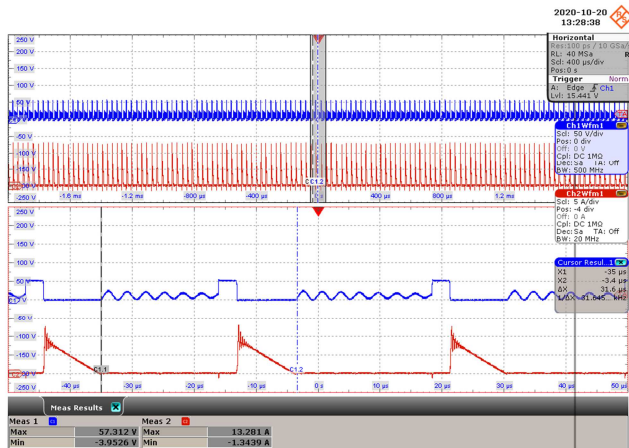
9.5 *SR FET Waveforms, Steady-State*

Figure 30 – SRFET Drain to Source Voltage Waveforms.
 $V_{IN} = 400 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 SRFET $V_{DS(MAX)}$ = 57.3 V.
 SRFET $I_{DS(MAX)}$ = 13.3 A.
 Upper: SRFET V_{DS} , 50 V, 400 μs / div.
 Lower: SRFET I_{DS} , 5 A, 400 μs / div.
 Bottom Half: Zoom @ 10 μs / div.

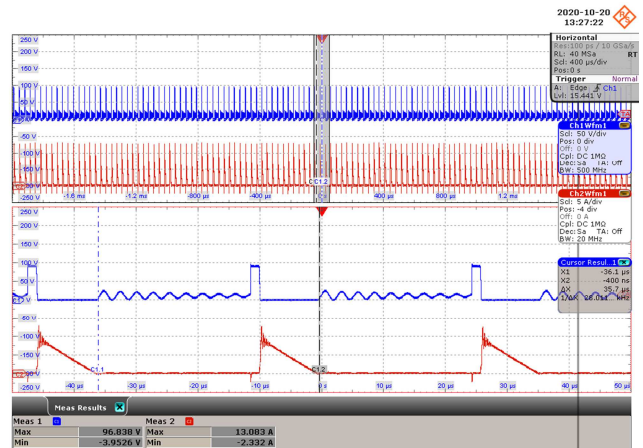


Figure 31 – SRFET Drain to Source Voltage Waveforms.
 $V_{IN} = 800 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 SRFET $V_{DS(MAX)}$ = 96.8 V.
 SRFET $I_{DS(MAX)}$ = 13.1 A.
 Upper: SRFET V_{DS} , 50 V, 400 μs / div.
 Lower: SRFET I_{DS} , 5 A, 400 μs / div.
 Bottom Half: Zoom @ 10 μs / div.

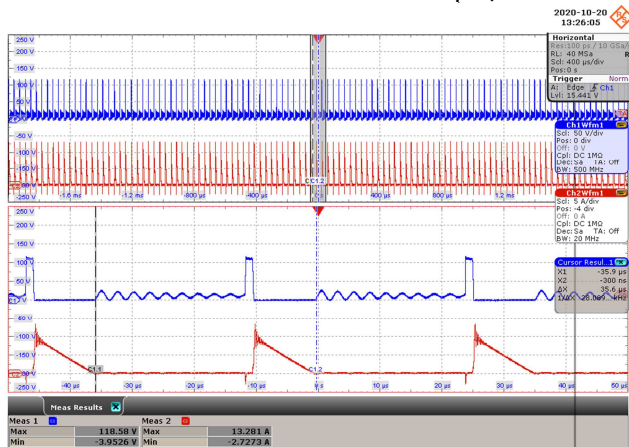


Figure 32 – SRFET Drain to Source Voltage Waveforms.
 $V_{IN} = 1000 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 SRFET $V_{DS(MAX)}$ = 118.6 V.
 SRFET $I_{DS(MAX)}$ = 13.3 A.
 Upper: SRFET V_{DS} , 50 V, 400 μs / div.
 Lower: SRFET I_{DS} , 5 A, 400 μs / div.
 Bottom Half: Zoom @ 10 μs / div.

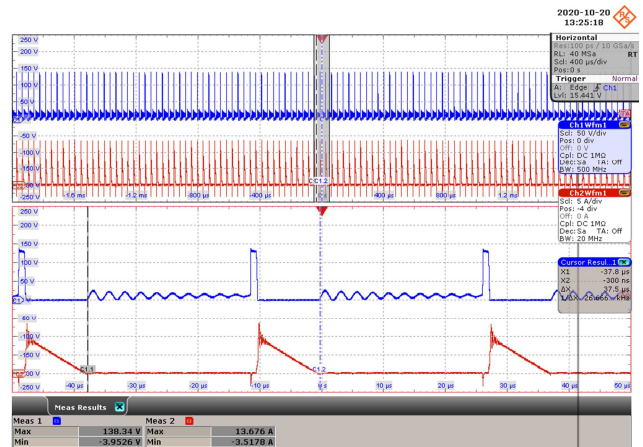
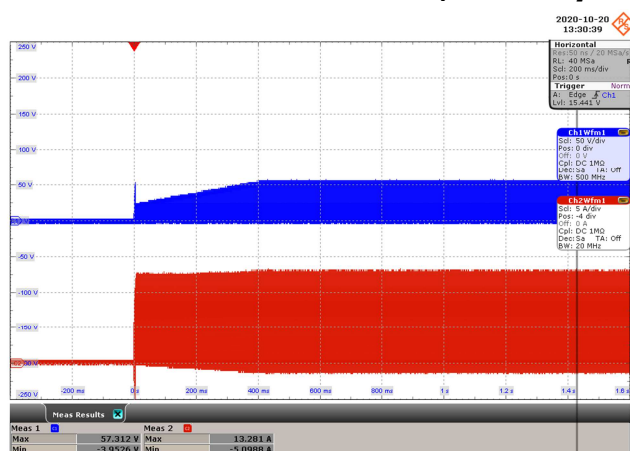
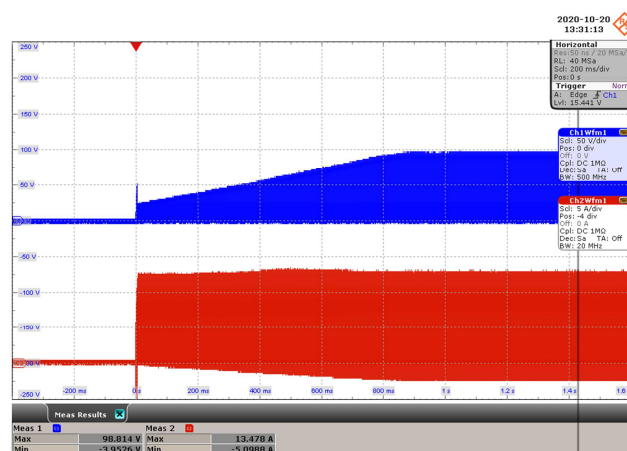



Figure 33 – SRFET Drain to Source Voltage Waveforms.
 $V_{IN} = 1200 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 SRFET $V_{DS(MAX)}$ = 138.3 V.
 SRFET $I_{DS(MAX)}$ = 13.7 A.
 Upper: SRFET V_{DS} , 50 V, 400 μs / div.
 Lower: SRFET I_{DS} , 5 A, 400 μs / div.
 Bottom Half: Zoom @ 10 μs / div.

9.6 *SR FET Waveforms, Start-up***Figure 34** – SRFET Drain to Source Voltage Waveforms.


$V_{IN} = 400 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 SRFET $V_{DS(MAX)} = 57.3 \text{ V}$.
 SRFET $I_{DS(MAX)} = 13.3 \text{ A}$.
 Upper: SRFET V_{DS} , 50 V, 200 ms / div.
 Lower: SRFET I_{DS} , 5 A, 200 ms / div.

**Figure 35** – SRFET Drain to Source Voltage Waveforms.

$V_{IN} = 800 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 SRFET $V_{DS(MAX)} = 98.8 \text{ V}$.
 SRFET $I_{DS(MAX)} = 13.5 \text{ A}$.
 Upper: SRFET V_{DS} , 50 V, 200 ms / div.
 Lower: SRFET I_{DS} , 5 A, 200 ms / div.

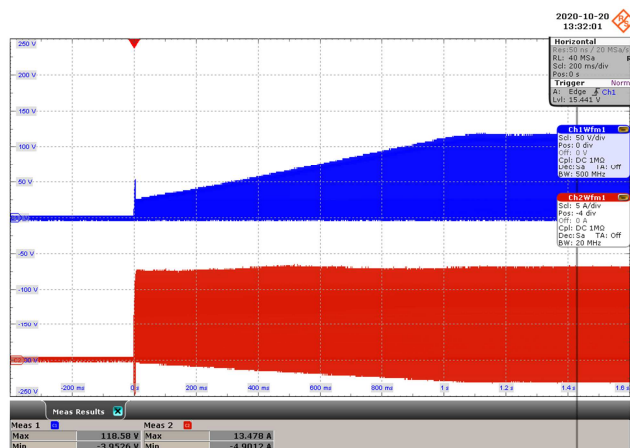**Figure 36** – SRFET Drain to Source Voltage Waveforms.

$V_{IN} = 1000 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 SRFET $V_{DS(MAX)} = 118.6 \text{ V}$.
 SRFET $I_{DS(MAX)} = 13.5 \text{ A}$.
 Upper: SRFET V_{DS} , 50 V, 200 ms / div.
 Lower: SRFET I_{DS} , 5 A, 200 ms / div.

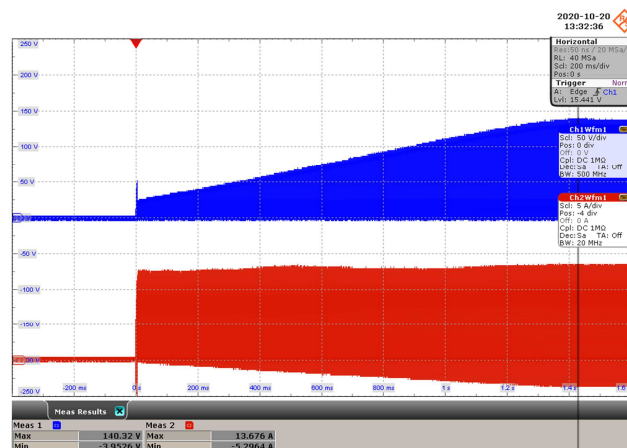**Figure 37** – SRFET Drain to Source Voltage Waveforms.

$V_{IN} = 1200 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 SRFET $V_{DS(MAX)} = 140.3 \text{ V}$.
 SRFET $I_{DS(MAX)} = 13.7 \text{ A}$.
 Upper: SRFET V_{DS} , 50 V, 200 ms / div.
 Lower: SRFET I_{DS} , 5 A, 200 ms / div.

9.7 ***Output Ripple Measurements***

For DC output ripple measurements, a modified oscilloscope test probe must be utilized in order to reduce spurious signals due to pick-up. Details of the probe modification are provided in the Figures below.

The 4987BA probe adapter is affixed with once capacitor tied in parallel across the probe tip. The capacitor includes one (1) 1 μ F/50 V ceramic type.

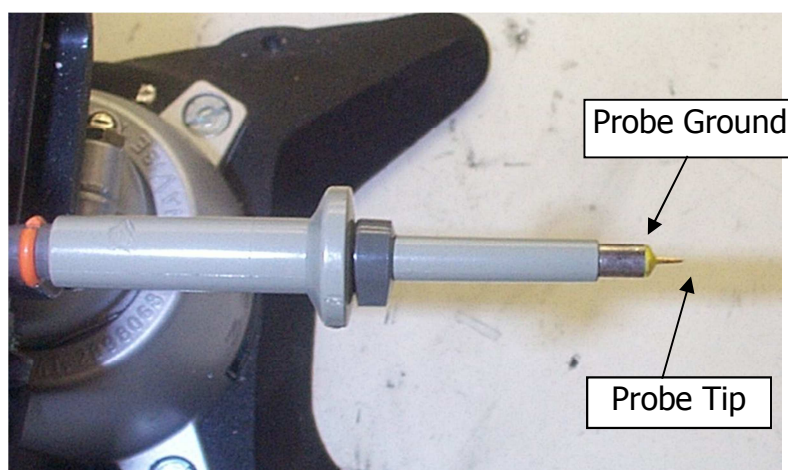


Figure 38 – Oscilloscope Probe Prepared for Ripple Measurement. (End Cap and Ground Lead Removed)

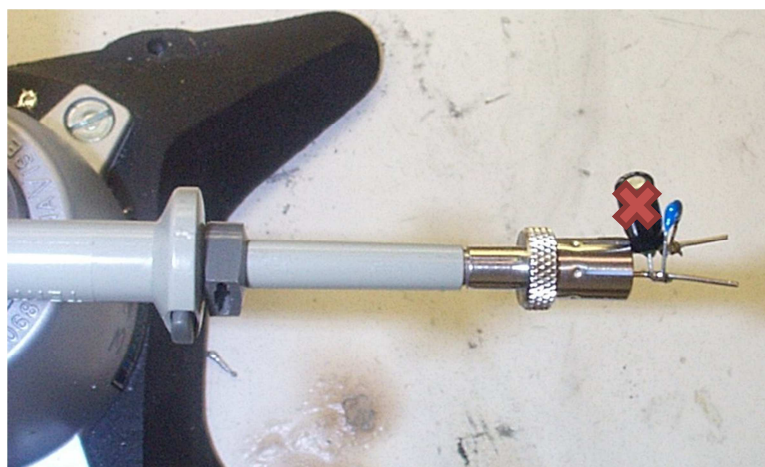
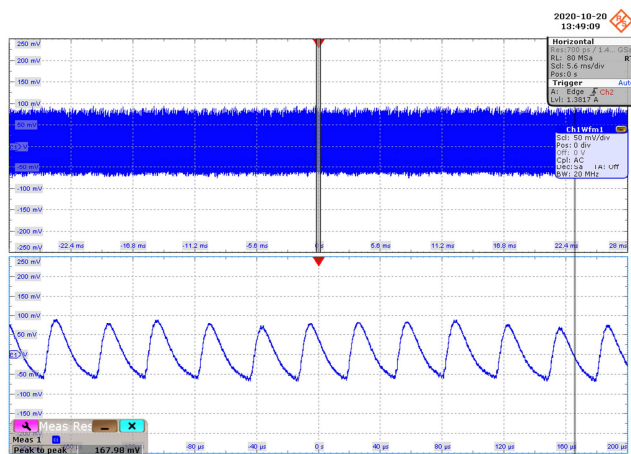
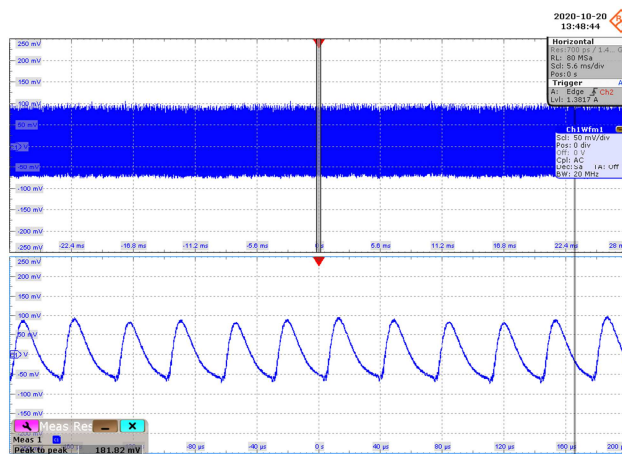
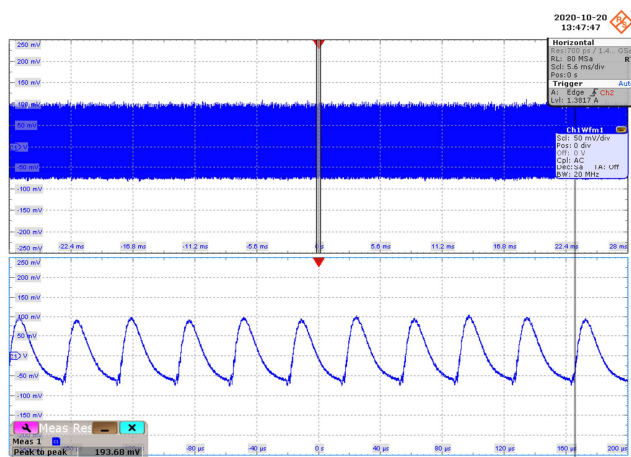
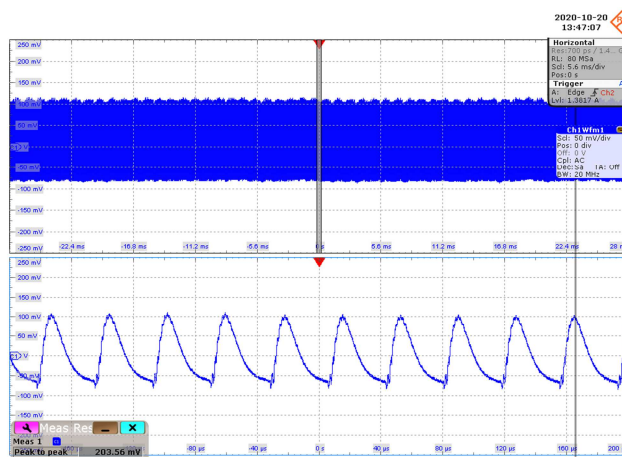


Figure 39 – Oscilloscope Probe with Probe Master (www.probemaster.com) 4987A BNC Adapter. (Modified with wires for ripple measurement, and one parallel decoupling capacitor added)

9.7.1 100% Loading Condition

**Figure 40** – Output Voltage Ripple. $V_{IN} = 400 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.Upper: V_{OUT} , 50 mV, 5.6 ms / div.Lower: Zoom @ 40 μs / div. $V_{RIPPLE} = 168 \text{ mV}_{P-P}$.**Figure 41** – Output Voltage Ripple. $V_{IN} = 800 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.Upper: V_{OUT} , 50 mV, 5.6 ms / div.Lower: Zoom @ 40 μs / div. $V_{RIPPLE} = 182 \text{ mV}_{P-P}$.**Figure 42** – Output Voltage Ripple. $V_{IN} = 1000 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.Upper: V_{OUT} , 50 mV, 5.6 ms / div.Lower: Zoom @ 40 μs / div. $V_{RIPPLE} = 194 \text{ mV}_{P-P}$.**Figure 43** – Output Voltage Ripple. $V_{IN} = 1200 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.Upper: V_{OUT} , 50 mV, 5.6 ms / div.Lower: Zoom @ 40 μs / div. $V_{RIPPLE} = 204 \text{ mV}_{P-P}$.

The top screenshot shows a digital oscilloscope display. The vertical axis represents voltage, ranging from -250 mV to 250 mV. The horizontal axis represents time, ranging from 0 to 200 ns. A noisy signal is displayed, centered around 0 mV. A vertical cursor is positioned at 25.0 ns. The top right corner shows the date and time: 2020-10-20 19:51:33. The bottom right corner shows the measurement settings: Horizontal, Pos: 0.0, Scale: 1.4, RL: 80 MSa, Exp: 5.0 ms/div, Pos: 0.0, Trigger, A: Edge, F: Chk, Off: 500.7, and Ch1: Vol.

The bottom screenshot shows the same digital oscilloscope display. The vertical axis represents voltage, ranging from -250 mV to 250 mV. The horizontal axis represents time, ranging from 0 to 200 ns. A periodic waveform is displayed, centered around 0 mV. A peak-to-peak measurement is shown at the bottom left: Meas 1, Peak to Peak, 160.00 mV. The bottom right corner shows the measurement settings: Horizontal, Pos: 0.0, Scale: 1.4, RL: 80 MSa, Exp: 5.0 ms/div, Pos: 0.0, Trigger, A: Edge, F: Chk, Off: 500.7, and Ch1: Vol.

2020-10-20
13:52:24

Horizontal
RL: 80 MS/s
Pos: 5.0 mV/div
Pos: 0
Trigger
RL: 80 MS/s
Pos: 5.0 mV/div
Pos: 0

Channel 1
Vol: 50 mV/div
Pos: 0
Cou: AC
NRC: SA | AI: Off
BW: 10 MHz

Meas 1
Peak-to-Peak: 175.89 mV

2020-10-20 13:52:48

Horizontal

Pos: 0.0 V

Div: 5.0 mV/div

Pos: 0.0

Trigger: A: Edge F Ch2

On: 1.017%

ch1wfml

Vol: 50 mV/div

Pos: 0.0 V

Div: 0.0 V

Ch2wfml

Vol: 50 mV/div

Pos: 0.0 V


Div: 0.0 V

Peak to peak: 177.8 mV

Max 1

0 s

200 ns

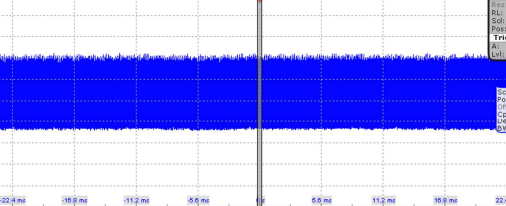

2020-10-20
13:53:20





Horizontal
Pos: 0.000 V
Div: 80.00 mV
Scale: 8.00 mV/div
Position: 0.000 V
Trigger: Auto
A: Edge
B: Ch1
C: 2.017 V

Ch1: 50 mV/div
Pos: 0.000 V
Div: 80.00 mV
Scale: 8.00 mV/div
Position: 0.000 V
Trigger: Auto
A: Edge
B: Ch1
C: 2.017 V


Peak to peak: 181.82 mV

9


9.7.3 50% Loading Condition

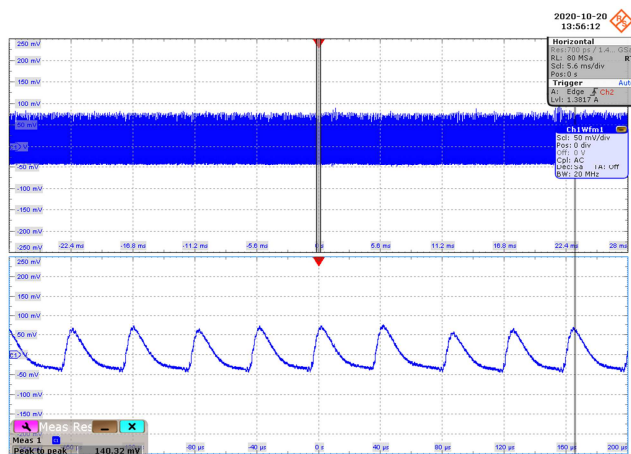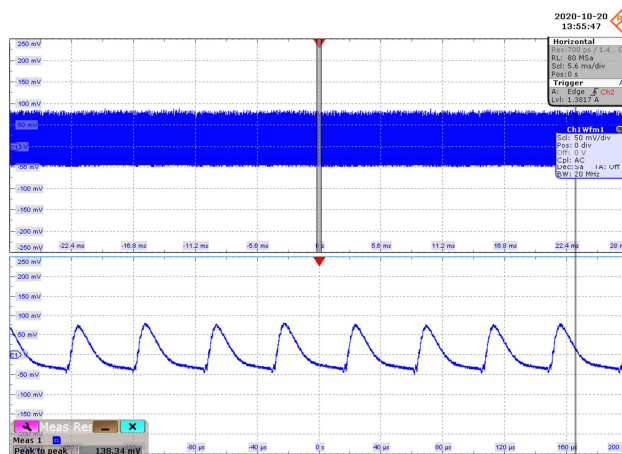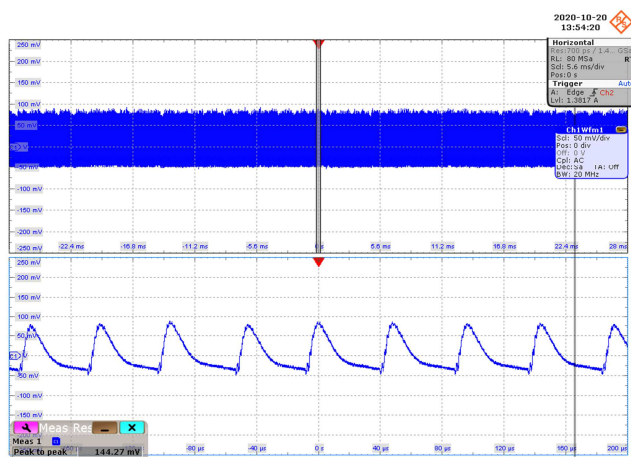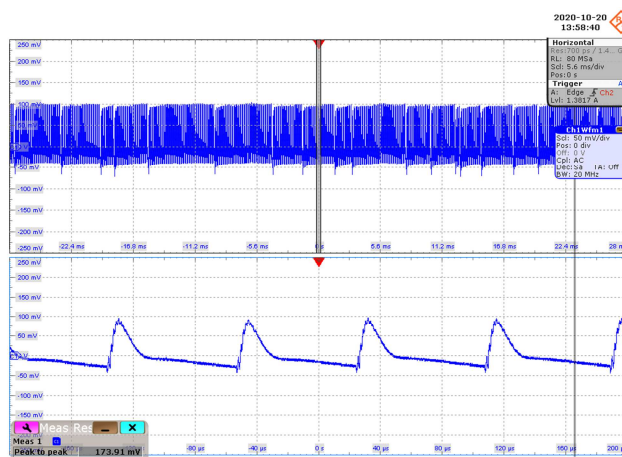**Figure 48** – Output Voltage Ripple. $V_{IN} = 400 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.Upper: V_{OUT} , 50 mV, 5.6 ms / div.Lower: Zoom @ 40 μs / div. $V_{RIPPLE} = 140 \text{ mV}_{P-P}$.**Figure 49** – Output Voltage Ripple. $V_{IN} = 800 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.Upper: V_{OUT} , 50 mV, 5.6 ms / div.Lower: Zoom @ 40 μs / div. $V_{RIPPLE} = 138 \text{ mV}_{P-P}$.**Figure 50** – Output Voltage Ripple. $V_{IN} = 1000 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.Upper: V_{OUT} , 50 mV, 5.6 ms / div.Lower: Zoom @ 40 μs / div. $V_{RIPPLE} = 144 \text{ mV}_{P-P}$.**Figure 51** – Output Voltage Ripple. $V_{IN} = 1200 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.Upper: V_{OUT} , 50 mV, 5.6 ms / div.Lower: Zoom @ 40 μs / div. $V_{RIPPLE} = 174 \text{ mV}_{P-P}$.


9.7.4 25% Loading Condition

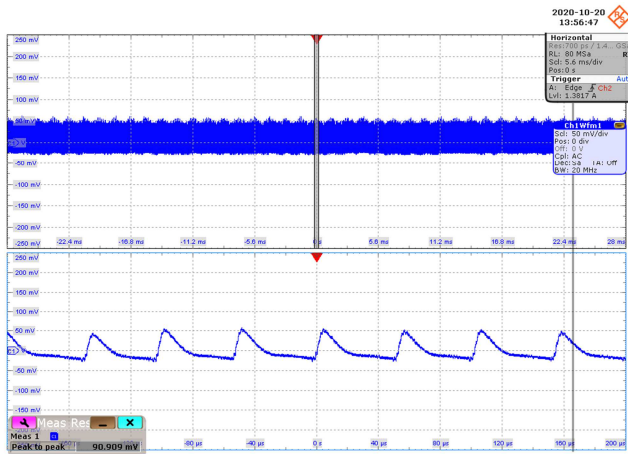**Figure 52** – Output Voltage Ripple.


$V_{IN} = 400 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 Upper: V_{OUT} , 50 mV, 5.6 ms / div.
 Lower: Zoom @ 40 μs / div.
 $V_{RIPPLE} = 99 \text{ mV}_{P-P}$.

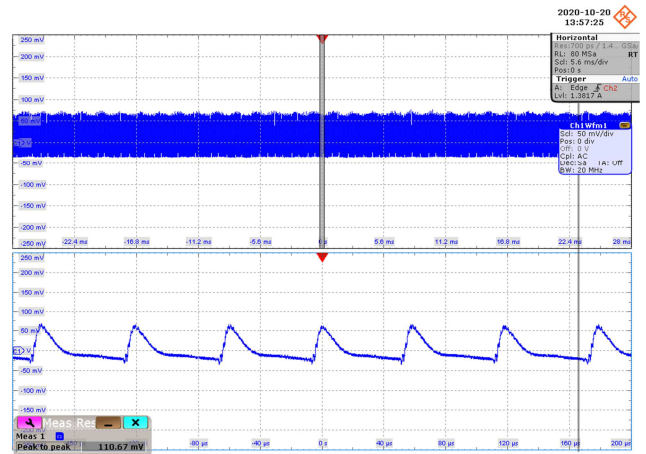**Figure 53** – Output Voltage Ripple.

$V_{IN} = 800 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 Upper: V_{OUT} , 50 mV, 5.6 ms / div.
 Lower: Zoom @ 40 μs / div.
 $V_{RIPPLE} = 111 \text{ mV}_{P-P}$.

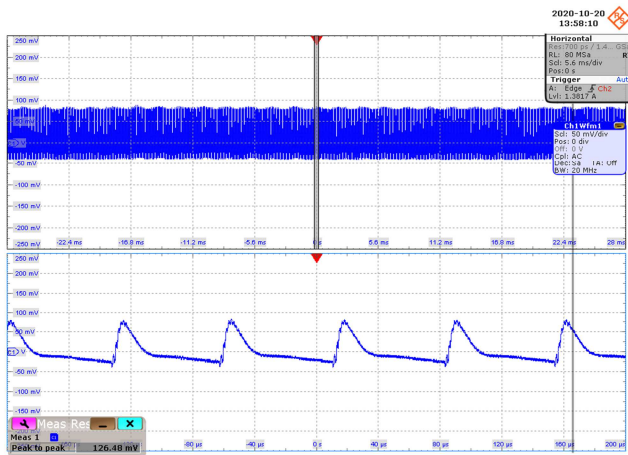**Figure 54** – Output Voltage Ripple.

$V_{IN} = 1000 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 Upper: V_{OUT} , 50 mV, 5.6 ms / div.
 Lower: Zoom @ 40 μs / div.
 $V_{RIPPLE} = 126 \text{ mV}_{P-P}$.

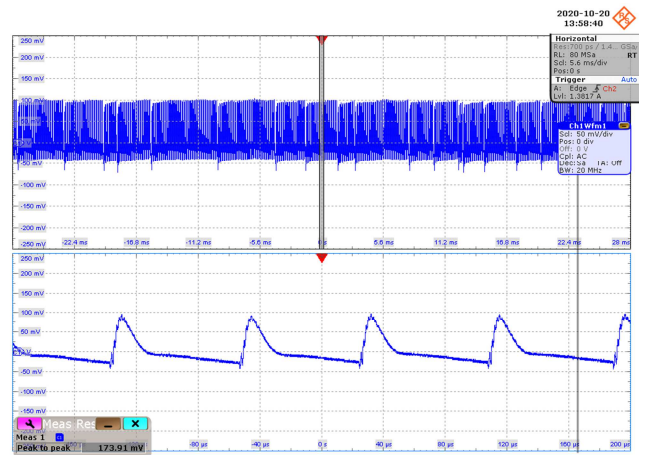**Figure 55** – Output Voltage Ripple.

$V_{IN} = 1200 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A}$.
 Upper: V_{OUT} , 50 mV, 5.6 ms / div.
 Lower: Zoom @ 40 μs / div.
 $V_{RIPPLE} = 174 \text{ mV}_{P-P}$.

The image displays two oscilloscope waveforms. The top waveform shows a square wave with a period of 22.4 ms and a peak-to-peak voltage of 2.5 V. The bottom waveform shows a square wave with a period of 200 μs and a peak-to-peak voltage of 67.194 mV. Both waveforms are measured on a 50 mV/div vertical scale and a 20 ms/div horizontal scale.

2020-10-20 14:01:16

Horizontal

Scale: 20.0 ns/div

Pos: 0.0

Trigger: Normal

Ch1: 50 mV/div

Scale: 50 mV/div

Pos: 0.0

Unit: V

Bandwidth: 100 MHz

Offset: 0.0 V

Meas: Peak to Peak 90.90 mV

Two oscilloscope waveforms are displayed side-by-side, comparing a signal transition with and without a 100 pF capacitor.

Top Waveform (No cap):

- Vertical scale: 50 mV/div (0 to 250 mV)
- Horizontal scale: 20 ns/div (0 to 200 ns)
- Trigger: Edge, Ch1, Normal, 0 V
- Waveform: Shows a sharp, high-frequency spike reaching approximately 250 mV.

Bottom Waveform (With cap):

- Vertical scale: 50 mV/div (0 to 250 mV)
- Horizontal scale: 20 ns/div (0 to 200 ns)
- Trigger: Edge, Ch1, Normal, 100 mV
- Waveform: Shows a much smoother transition with a peak of 102.77 mV.

The comparison demonstrates that the 100 pF capacitor significantly reduces the high-frequency noise and overshoot of the signal transition.


2020-10-20
14:00:13

Horizontal
 Pos: 0.000
 Div: 1.000
 RL: 80 MΩ
 Fall: 5.4 ns/div
 Pos: 0.5
 Trigger: Norm
 Edge: f Ch1
 Len: 75 ms

Ch1 w/1
 Set: 50 mv/div
 Pos: 0 div
 Cou: 0.5
 Cou: Auto AC
 Band: 20 Hz
 Filter: 100 kHz
 Mode: 20 MHz

Peak to peak: 114.62 mV

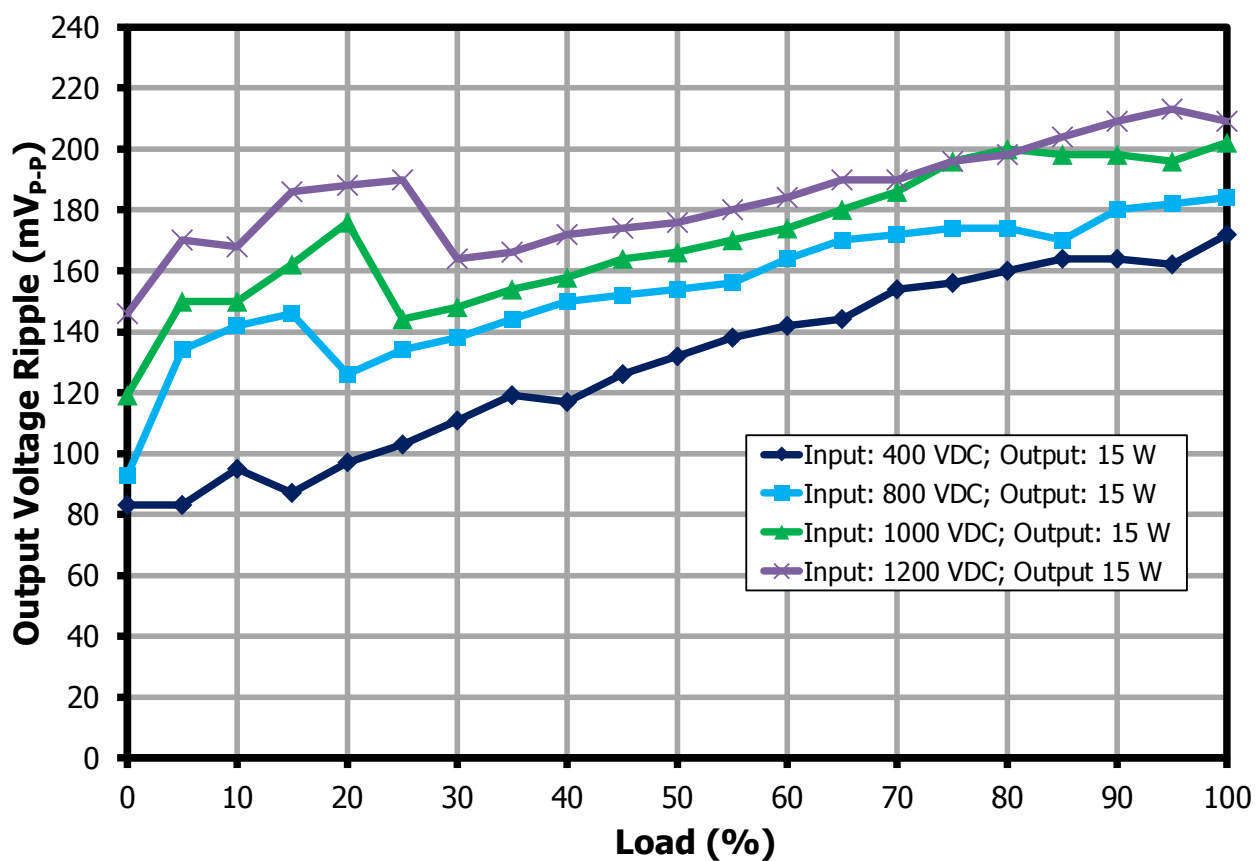

9.8 **Output Voltage Ripple (ATE)****Figure 60** – Output Voltage Ripple.

9.9 Output Load Transient

9.9.1 Output Load Transient, 100% to 50% Load

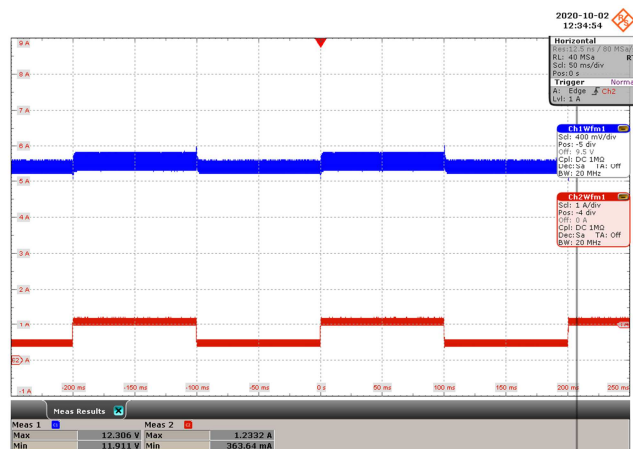


Figure 61 – Output Load Transient, 100% to 50% Load.
 $V_{IN} = 400$ VDC, $I_{OUT} = 1.25$ A to 0.625 A.
 $V_{OUT(MAX)} = 12.31$ V, $V_{OUT(MIN)} = 11.91$ V.
 Upper: V_{OUT} , 400 mV, 50 ms / div.
 Lower: I_{OUT} , 1 A, 50 ms / div.

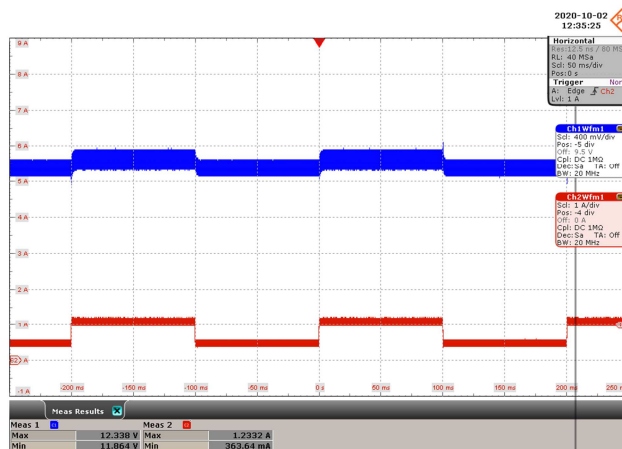


Figure 62 – Output Load Transient, 100 % to 50 % Load.
 $V_{IN} = 800$ VDC, $I_{OUT} = 1.25$ A to 0.625 A.
 $V_{OUT(MAX)} = 12.34$ V, $V_{OUT(MIN)} = 11.85$ V.
 Upper: V_{OUT} , 400 mV, 50 ms / div.
 Lower: I_{OUT} , 1 A, 50 ms / div.

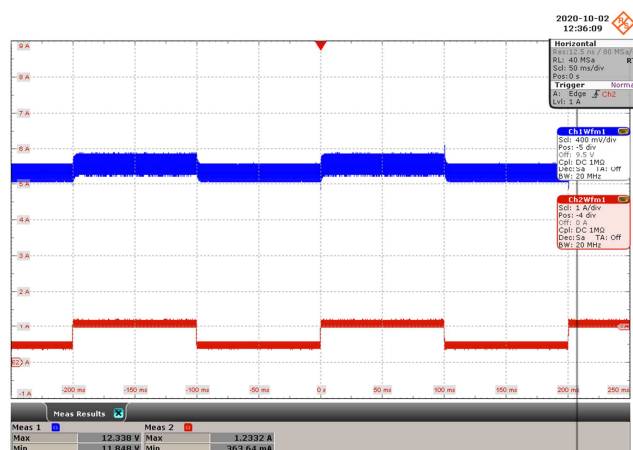


Figure 63 – Output Load Transient, 100% to 50% Load.
 $V_{IN} = 1000$ VDC, $I_{OUT} = 1.25$ A to 0.625 A.
 $V_{OUT(MAX)} = 12.34$ V, $V_{OUT(MIN)} = 11.85$ V.
 Upper: V_{OUT} , 400 mV, 50 ms / div.
 Lower: I_{OUT} , 1 A, 50 ms / div.

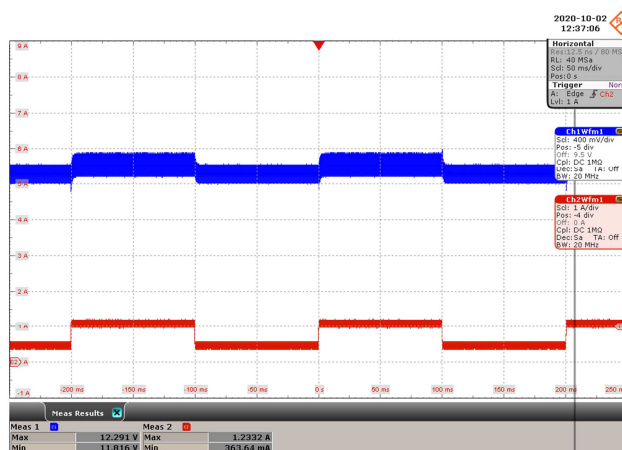


Figure 64 – Output Load Transient, 100 % to 50 % Load.
 $V_{IN} = 1200$ VDC, $I_{OUT} = 1.25$ A to 0.625 A.
 $V_{OUT(MAX)} = 12.29$ V, $V_{OUT(MIN)} = 11.82$ V.
 Upper: V_{OUT} , 400 mV, 50 ms / div.
 Lower: I_{OUT} , 1 A, 50 ms / div.

9.9.2 Output Load Transient, 100% to 0% Load

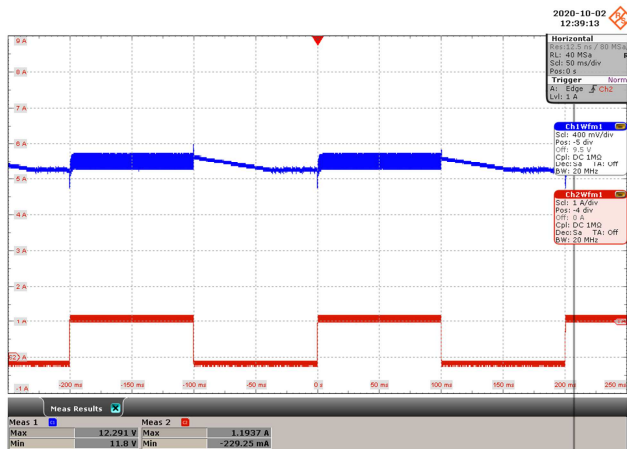


Figure 65 – Output Load Transient, 100% to 0% Load.

$V_{IN} = 400 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A to } 0 \text{ A}$.
 $V_{OUT(MAX)} = 12.29 \text{ V}$, $V_{OUT(MIN)} = 11.8 \text{ V}$.
 Upper: V_{OUT} , 400 mV, 50 ms / div.
 Lower: I_{OUT} , 1 A, 50 ms / div.

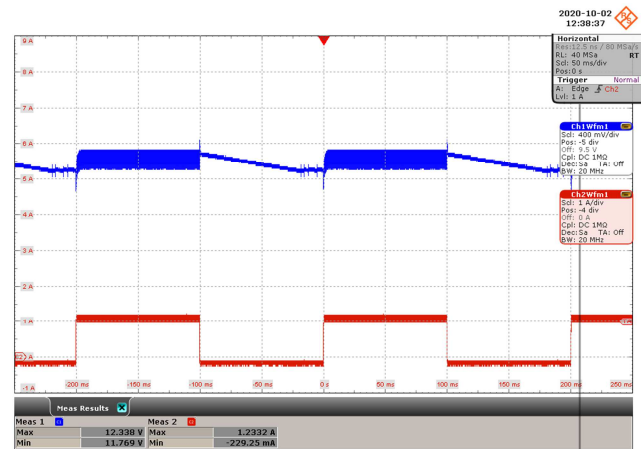


Figure 66 – Output Load Transient, 100 % to 0 % Load.

$V_{IN} = 800 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A to } 0 \text{ A}$.
 $V_{OUT(MAX)} = 12.34 \text{ V}$, $V_{OUT(MIN)} = 11.77 \text{ V}$.
 Upper: V_{OUT} , 400 mV, 50 ms / div.
 Lower: I_{OUT} , 1 A, 50 ms / div.

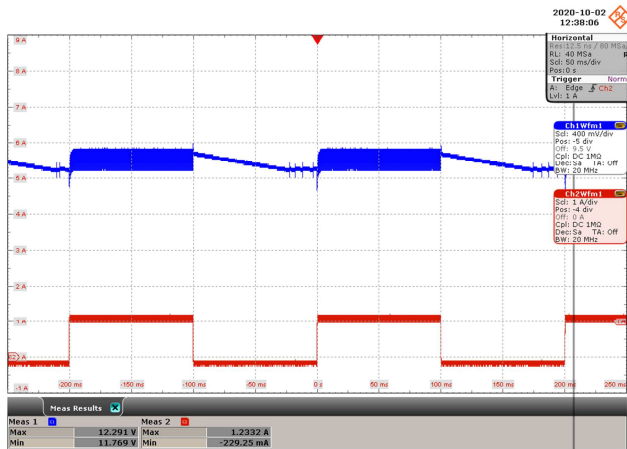


Figure 67 – Output Load Transient, 100% to 0% Load.

$V_{IN} = 1000 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A to } 0 \text{ A}$.
 $V_{OUT(MAX)} = 12.29 \text{ V}$, $V_{OUT(MIN)} = 11.77 \text{ V}$.
 Upper: V_{OUT} , 400 mV, 50 ms / div.
 Lower: I_{OUT} , 1 A, 50 ms / div.

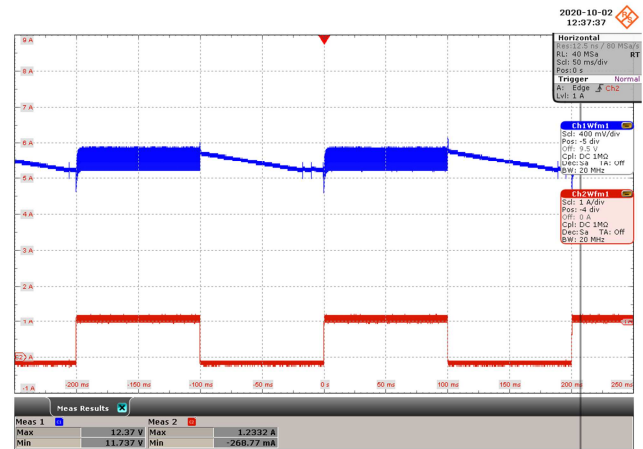


Figure 68 – Output Load Transient, 100 % to 0 % Load.

$V_{IN} = 1200 \text{ VDC}$, $I_{OUT} = 1.25 \text{ A to } 0 \text{ A}$.
 $V_{OUT(MAX)} = 12.37 \text{ V}$, $V_{OUT(MIN)} = 11.74 \text{ V}$.
 Upper: V_{OUT} , 400 mV, 50 ms / div.
 Lower: I_{OUT} , 1 A, 50 ms / div.

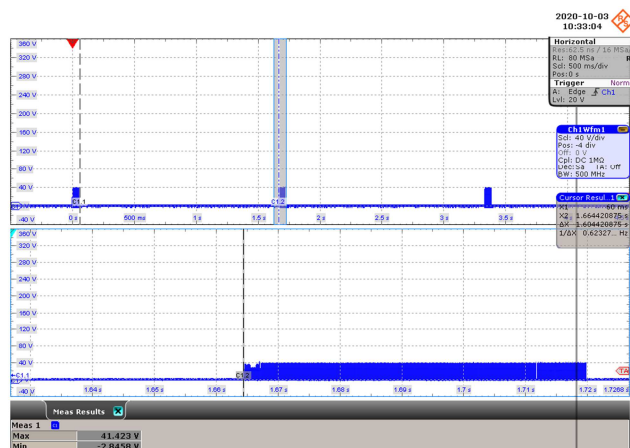
9.10 **FWD Waveforms During Shorted Output**

Figure 69 – FWD Voltage During Shorted Output.
 $V_{IN} = 400 \text{ VDC}$ $V_{FWD(MAX)} = 41 \text{ V}$.
 Upper: V_{FWD} , 40 V, 500 ms / div.
 Lower: Zoom @ 10 μs / div.

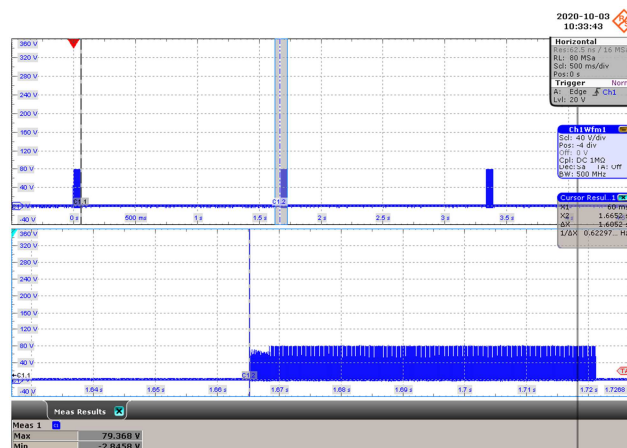


Figure 70 – FWD Voltage During Shorted Output.
 $V_{IN} = 800 \text{ VDC}$ $V_{FWD(MAX)} = 79 \text{ V}$.
 Upper: V_{FWD} , 40 V, 500 ms / div.
 Lower: Zoom @ 10 μs / div.

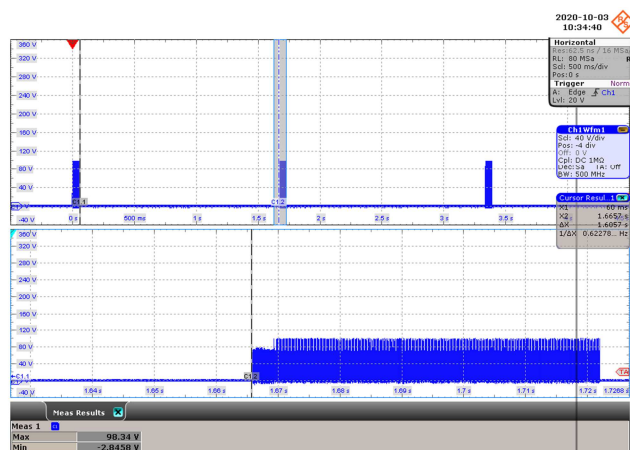


Figure 71 – FWD Voltage During Shorted Output.
 $V_{IN} = 1000 \text{ VDC}$ $V_{FWD(MAX)} = 98 \text{ V}$.
 Upper: V_{FWD} , 40 V, 500 ms / div.
 Lower: Zoom @ 10 μs / div.

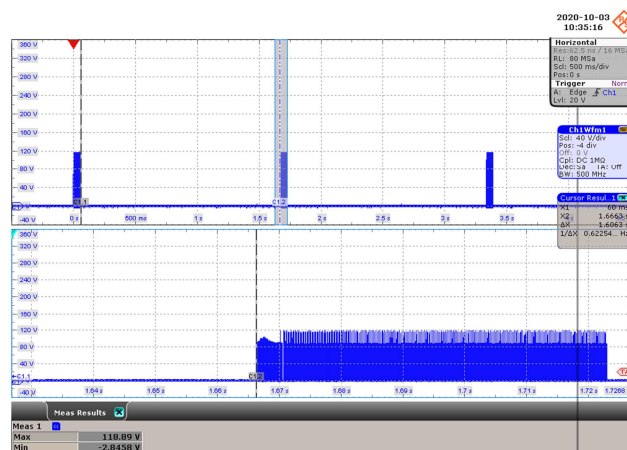


Figure 72 – FWD Voltage During Shorted Output.
 $V_{IN} = 1200 \text{ VDC}$ $V_{FWD(MAX)} = 119 \text{ V}$.
 Upper: V_{FWD} , 40 V, 500 ms / div.
 Lower: Zoom @ 10 μs / div.

10 Thermal Performance

All measurements have been done at room ambient temperature after 1 hour of continuous operation.

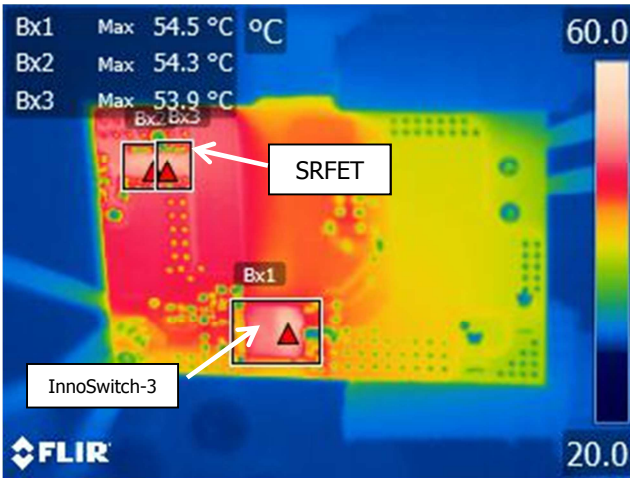


Figure 73 – 400 VDC 1.25 A Full Load.
 Temperature of INN3996CQ: 54.5 °C.
 Temperature of SR FET1(Q2): 54.3 °C.
 Temperature of SR FET2(Q3): 53.9 °C.
 Ambient Temperature: 28.5 °C.

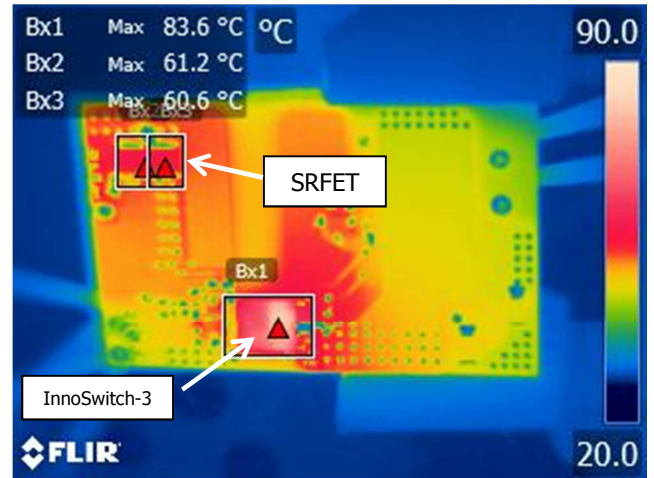


Figure 74 – 800 VDC 1.25 A Full Load.
 Temperature of INN3996CQ: 83.6 °C.
 Temperature of SR FET1(Q2): 61.2 °C.
 Temperature of SR FET2(Q3): 60.6 °C.
 Ambient Temperature: 29 °C.

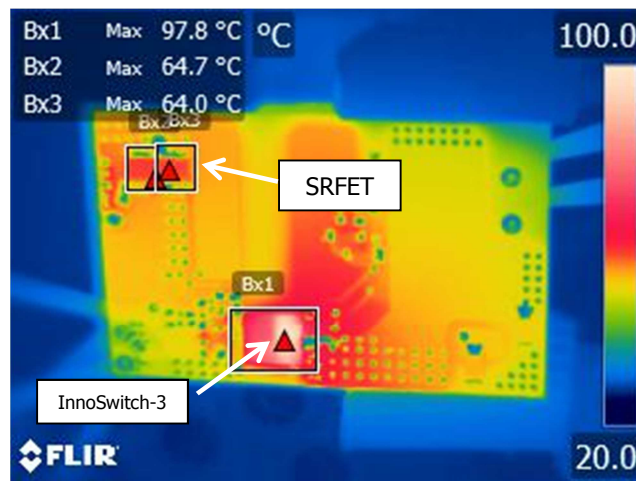


Figure 75 – 1000 VDC 1.25 A Full Load.
 Temperature of INN3996CQ: 97.8 °C.
 Temperature of SR FET1(Q2): 64.7 °C.
 Temperature of SR FET2(Q3): 64.0 °C.
 Ambient Temperature: 29.3 °C.

10.1 **Temperature vs. Output Power**

400 VDC					
P_{OUT} (W)	INN3977CQ (°C)	SR FET (°C)	TVS (°C)	STACKFET (°C)	AMB (°C)
15.07	54.5	54.3	41.1	41.7	28.5
11.31	49.9	47.6	38.2	39.9	28.3
7.53	49.6	42.8	37.5	38.9	28.3
3.74	43.6	36.3	34.7	35.4	27.8

800 VDC					
P_{OUT} (W)	INN3977CQ (°C)	SR FET (°C)	TVS (°C)	STACKFET (°C)	AMB (°C)
15.05	83.6	61.2	52.4	52.5	29.3
11.31	78.9	54.4	49.6	50.7	27.9
7.51	71.6	48	46.2	47.1	27.9
3.74	59.3	40.2	41	42	27.8

1000 VDC					
P_{OUT} (W)	INN3977CQ (°C)	SR FET (°C)	TVS (°C)	STACKFET (°C)	AMB (°C)
15.08	97.8	64.7	59.8	61.7	29.3
11.30	90.3	58.1	56.1	59.2	27.7
7.51	83.8	53.5	54.4	55.2	30.1
3.75	64.5	43.6	46.6	47.2	29.7

10.2 *Maximum Output Power vs. Ambient Temperature*

(Based on 125 °C junction temperature of INN3996CQ)

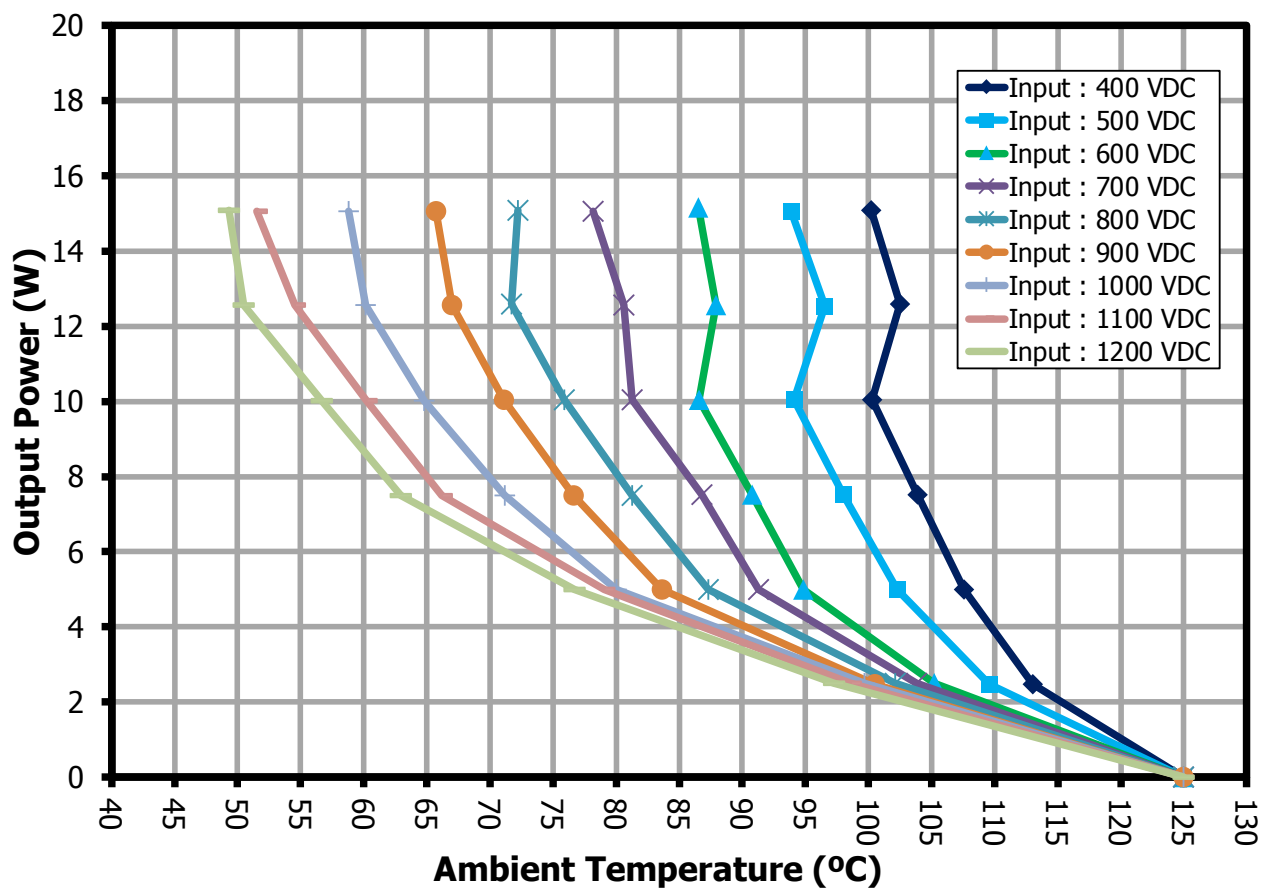


Figure 76 – Maximum Output Power vs. Ambient Temperature.

11 Revision History

Date	Author	Revision	Description & Changes	Reviewed
08-Dec-20	MA	1.0	Initial Release.	Mktg & Apps
09-Apr-21	MA	1.1	Change Minimum Input Voltage from 300 VDC to 40 VDC.	Mktg & Apps
20-Apr-21	MA	1.2	Change Minimum Input Voltage from 40 VDC to 30 VDC.	Mktg & Apps

For the latest updates, visit our website: www.power.com

Reference Designs are technical proposals concerning how to use Power Integrations' gate drivers in particular applications and/or with certain power modules. These proposals are "as is" and are not subject to any qualification process. The suitability, implementation and qualification are the sole responsibility of the end user. The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. All parameters, numbers, values and other technical data included in the technical information were calculated and determined to our best knowledge in accordance with the relevant technical norms (if any). They may be based on assumptions or operational conditions that do not necessarily apply in general. We exclude any representation or warranty, express or implied, in relation to the accuracy or completeness of the statements, technical information and recommendations contained herein. No responsibility is accepted for the accuracy or sufficiency of any of the statements, technical information, recommendations or opinions communicated and any liability for any direct, indirect or consequential loss or damage suffered by any person arising therefrom is expressly disclaimed.

Power Integrations reserves the right to make changes to its products at any time to improve reliability or manufacturability. Power Integrations does not assume any liability arising from the use of any device or circuit described herein. POWER INTEGRATIONS MAKES NO WARRANTY HEREIN AND SPECIFICALLY DISCLAIMS ALL WARRANTIES INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY RIGHTS.

Patent Information

The products and applications illustrated herein (including transformer construction and circuits' external to the products) may be covered by one or more U.S. and foreign patents, or potentially by pending U.S. and foreign patent applications assigned to Power Integrations. A complete list of Power Integrations' patents may be found at www.power.com. Power Integrations grants its customers a license under certain patent rights as set forth at <http://www.power.com/ip.htm>.

Power Integrations, the Power Integrations logo, CAPZero, ChiPhy, CHY, DPA-Switch, EcoSmart, E-Shield, eSIP, eSOP, HiperPLC, HiperPFS, HiperTFS, InnoSwitch, Innovation in Power Conversion, InSOP, LinkSwitch, LinkZero, LYTSwitch, SENZero, TinySwitch, TOPSwitch, PI, PI Expert, PowiGaN, SCALE, SCALE-1, SCALE-2, SCALE-3 and SCALE-iDriver, are trademarks of Power Integrations, Inc. Other trademarks are property of their respective companies. ©2019, Power Integrations, Inc.

Power Integrations Worldwide Sales Support Locations

WORLD HEADQUARTERS

5245 Hellyer Avenue
San Jose, CA 95138, USA.
Main: +1-408-414-9200
Customer Service:
Worldwide: +1-65-635-64480
Americas: +1-408-414-9621
e-mail: usasales@power.com

CHINA (SHANGHAI)

Rm 2410, Charity Plaza, No. 88,
North Caoxi Road,
Shanghai, PRC 200030
Phone: +86-21-6354-6323
e-mail: chinasales@power.com

CHINA (SHENZHEN)

17/F, Hivac Building, No. 2, Keji
Nan 8th Road, Nanshan District,
Shenzhen, China, 518057
Phone: +86-755-8672-8689
e-mail: chinasales@power.com

GERMANY (AC-DC/LED Sales)

Einsteinring 24
85609 Dornach/Aschheim
Germany
Tel: +49-89-5527-39100
e-mail: eurosales@power.com

GERMANY (Gate Driver Sales)

HellwegForum 1
59469 Ense
Germany
Tel: +49-2938-64-39990
e-mail: igbt-driver.sales@power.com

INDIA

#1, 14th Main Road
Vasanthanagar
Bangalore-560052
India
Phone: +91-80-4113-8020
e-mail: indiasales@power.com

ITALY

Via Milanese 20, 3rd Fl.
20099 Sesto San Giovanni (MI) Italy
Phone: +39-024-550-8701
e-mail: eurosales@power.com

JAPAN

Yusen Shin-Yokohama 1-chome Bldg.
1-7-9, Shin-Yokohama, Kohoku-ku
Yokohama-shi,
Kanagawa 222-0033 Japan
Phone: +81-45-471-1021
e-mail: japansales@power.com

KOREA

RM 602, 6FL
Korea City Air Terminal B/D,
159-6
Samsung-Dong, Kangnam-Gu,
Seoul, 135-728 Korea
Phone: +82-2-2016-6610
e-mail: koreasales@power.com

SINGAPORE

51 Newton Road,
#19-01/05 Goldhill Plaza
Singapore, 308900
Phone: +65-6358-2160
e-mail: singaporesales@power.com

TAIWAN

5F, No. 318, Nei Hu Rd.,
Sec. 1
Nei Hu District
Taipei 11493, Taiwan R.O.C.
Phone: +886-2-2659-4570
e-mail: taiwansales@power.com

UK

Building 5, Suite 21
The Westbrook Centre
Milton Road
Cambridge
CB4 1YG
Phone: +44 (0) 7823-557484
e-mail: eurosales@power.com

