


QQ: 2366453934

使用美芯晟科技的 MT 7830 外驱 MOS 效率>0.9 PF>0.9

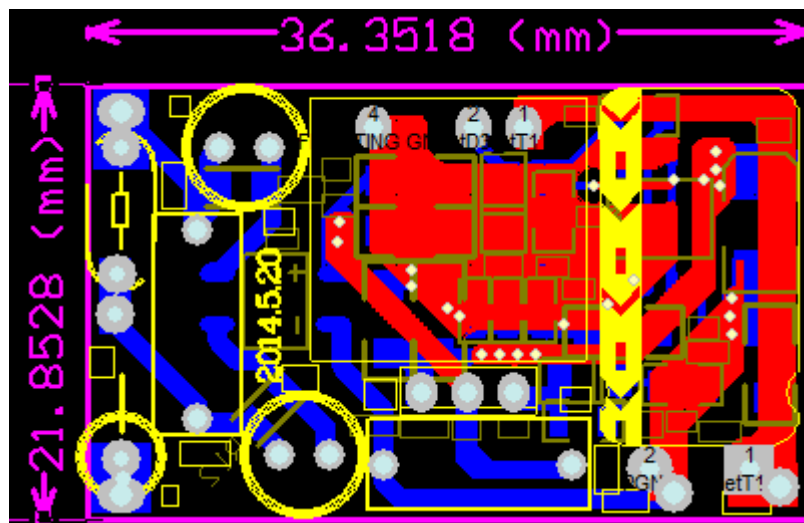


最大功率可做

25W

N 线


测试项目:	RE	日期:	2014/07/10
温度/湿度(%RH):	25℃	时间:	16/17/14
被测设备:	MT7830	测试员:	W
型号:	MT7830-75V-240MA		
备注:	N		

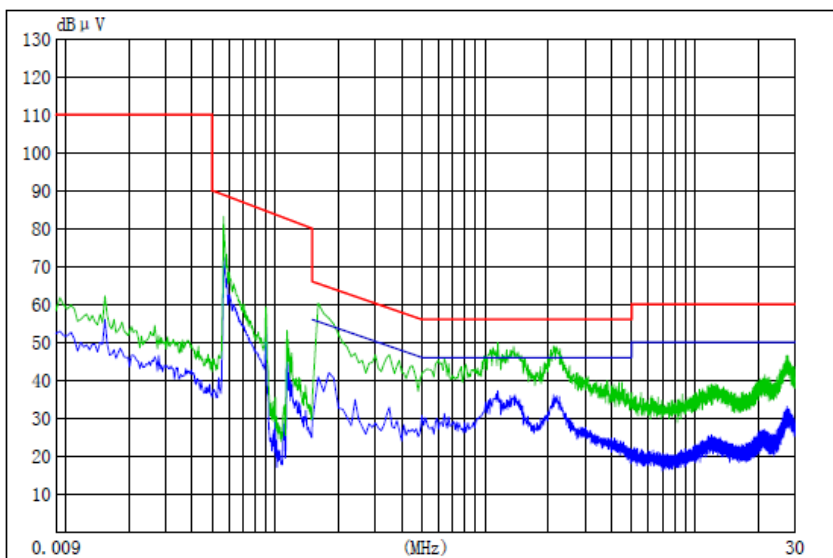

QQ: 2366453934

L 线


备注: L

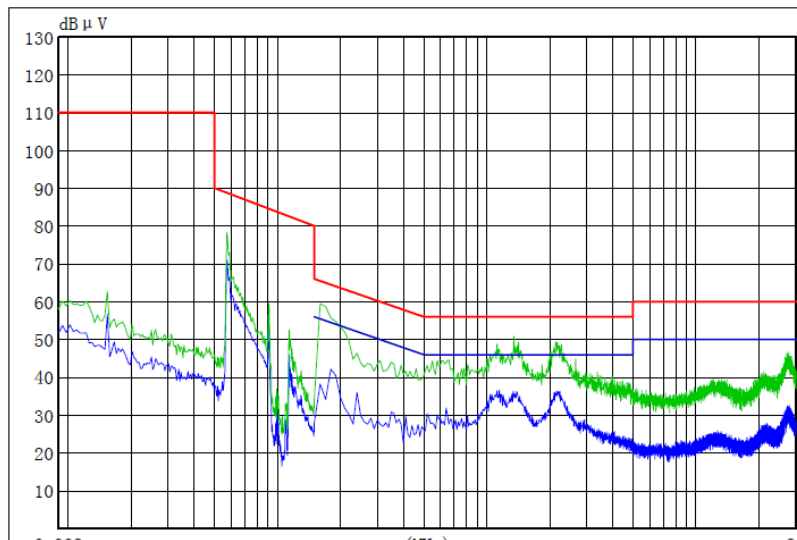

CDN


型号: MT7830-75V-240MA

备注: CDN

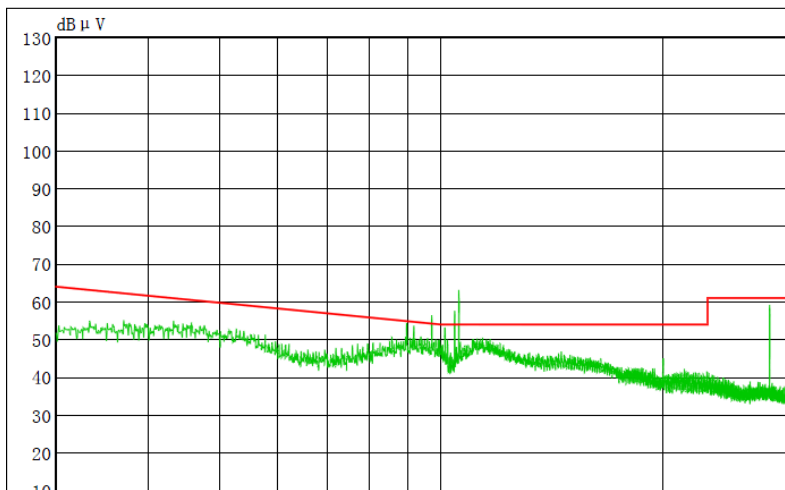


QQ: 2366453934

使用美芯晟科技的 MT 7813 内置 MOS 效率>0.9 PF>0.5

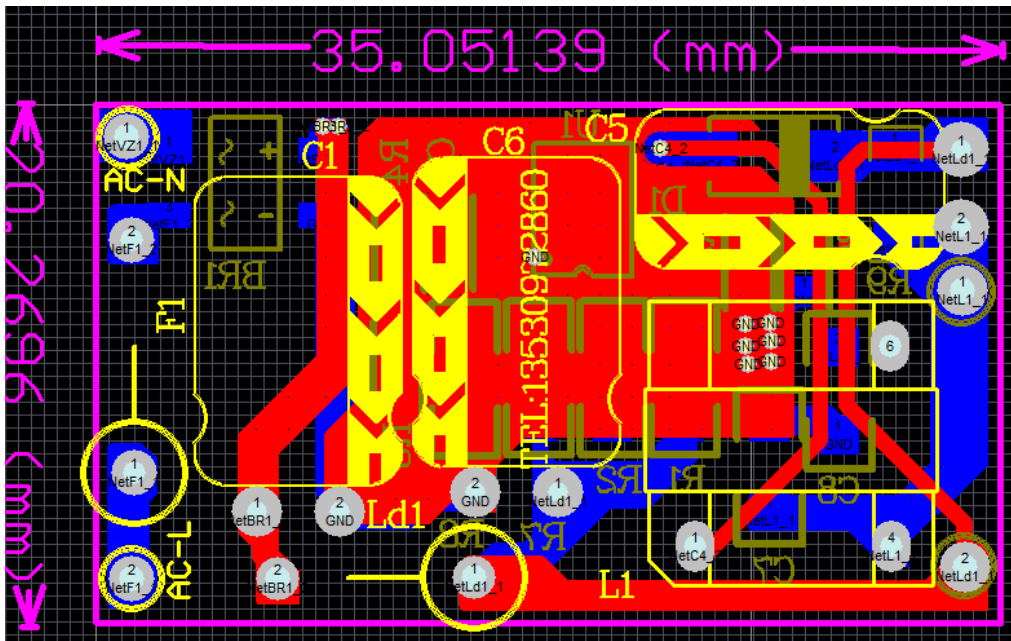


被测设备:	MT7813	测试员:	L
型号:	MT7813-75V200mA		
备注:	N		

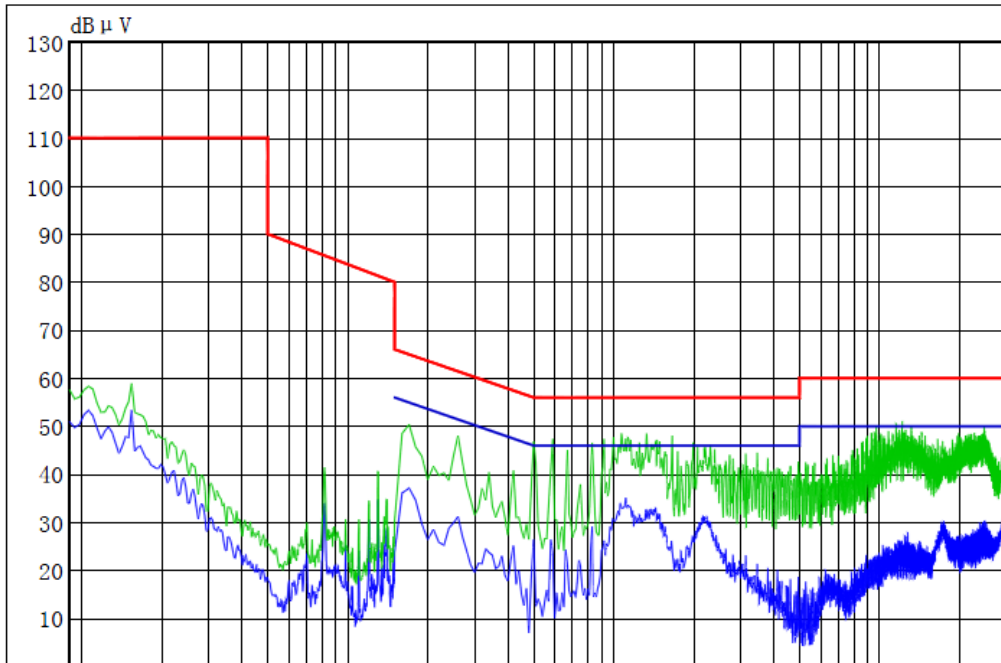

QQ: 2366453934

型号:	MT7813-75V200mA
备注:	L

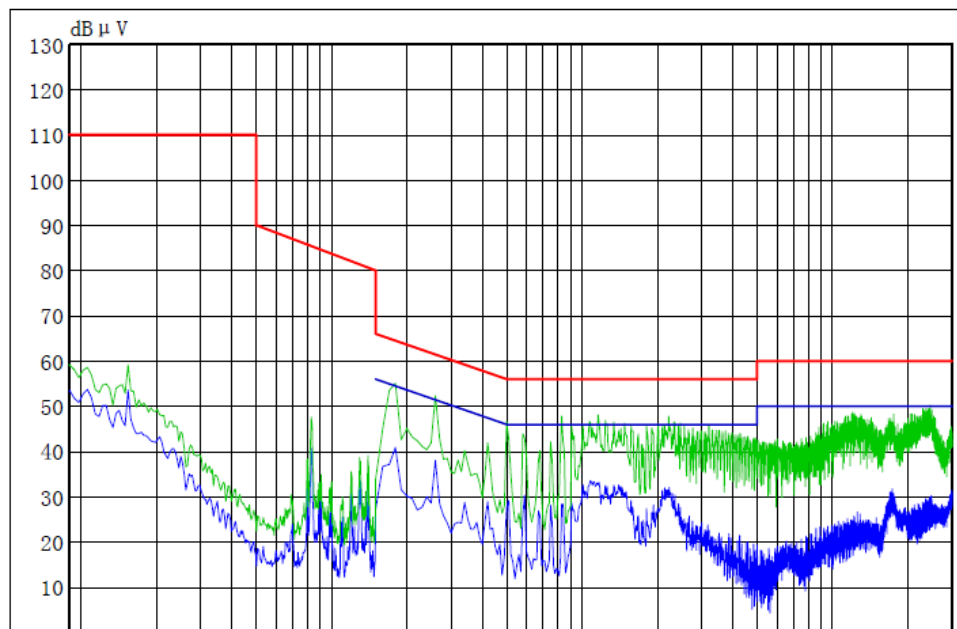

测试标准:	EN55015 CDN-M2	电源:	AC230
测试项目:	CE	日期:	2014/06/06
温度/湿度(%RH):	25°C	时间:	11/10/57
被测设备:	MT7813	测试员:	L
型号:	MT7813-75V200mA		
备注:	N		

