



特点:


- ◆ 提供外部 MCU 供电接口
- ◆ 可接收 MCU 调光信号
- ◆ 频闪: <8% (Typical)
- ◆ 功率因数: >0.8 (Typical)
- ◆ 功率变化: <10% (电网波动 10%时)
- ◆ 设计功率: $\leq 25W@220Vac$
 $\leq 15W@120Vac$

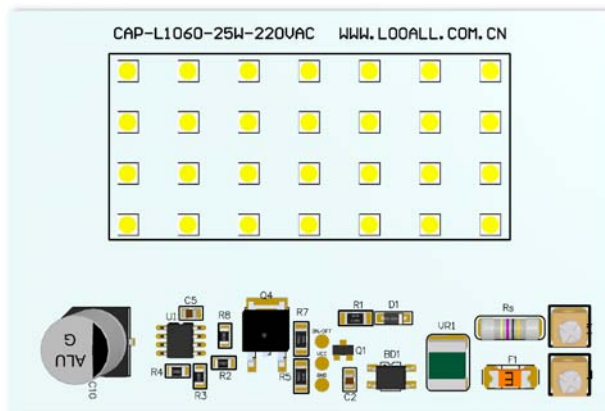


效率 vs 市电

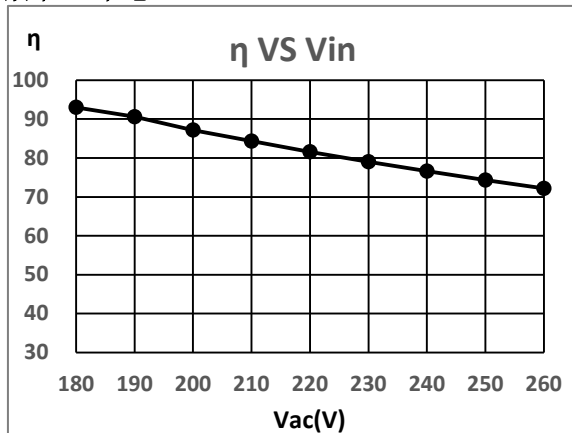

频闪深度 vs 市电

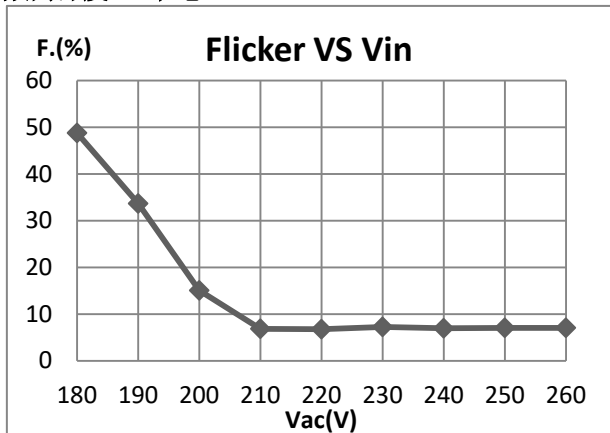

功率 VS 市电

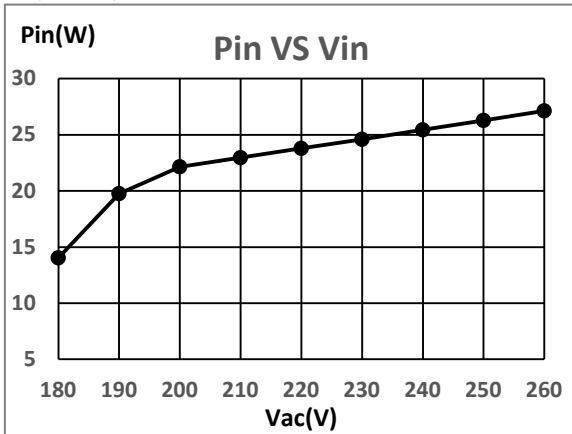

PF vs 市电

