

N-Channel Enhancement Mode MOSFET

TDM3454

DESCRIPTION



The TDM3454 uses advanced trench technology to provide excellent RDS(ON) and low gate charge. This device is suitable for use as a load switch or in PWM applications.

GENERAL FEATURES

- RDS(ON) < 6.2mΩ @ VGS=4.5V
RDS(ON) < 4mΩ @ VGS=10V
- High Power and current handing capability
- Lead free product is acquired
- Surface Mount Package

Application

- PWM applications
- Load switch
- Power management

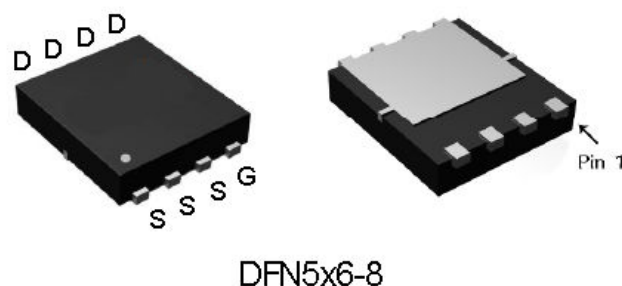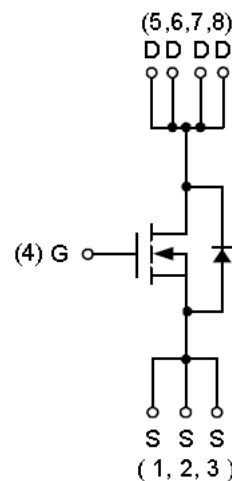

泰德半导体--提供样品, 技术支持 手机13418601901 QQ409545144

ABSOLUTE MAXIMUM RATINGS(TA=25°C unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V _{DS}	30	V
Gate-Source Voltage	V _{GS}	±20	V
Drain Current @ Continuous(Note 1)	I _D (T _C =25°C)	70	A
	I _D (T _C =100°C)	140	A
Drain Current @ Current-Pulsed (Note 2)	I _{DM} (T _C =25°C)	160	A
Maximum Power Dissipation (TA=25°C)	P _D	2.5	W
Maximum Operating Junction Temperature	T _J	150	°C
Storage Temperature Range	T _{STG}	-55 To 150	°C

THERMAL CHARACTERISTICS

Thermal Resistance,Junction-to-Ambient (Note 2)	R _{θJA}	50	°C/W
---	------------------	----	------

N-Channel Enhancement Mode MOSFET

TDM3454

ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250\mu A$	30			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=24V, V_{GS}=0V$			1	μA
Gate-Body Leakage Current	I_{GSS}	$V_{GS}=\pm 20V, V_{DS}=0V$			± 100	nA
ON CHARACTERISTICS (Note 3)						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	1.5	1.8	2.5	V
Drain-Source On-State Resistance	$R_{DS(on)}$	$V_{GS}=4.5V, I_D=15A$		4.6	6.2	m Ω
		$V_{GS}=10V, I_D=20A$		3.3	4	m Ω
DYNAMIC CHARACTERISTICS (Note 4)						
Input Capacitance	C_{iss}	$V_{DS}=15V, V_{GS}=0V, F=1.0MHz$		1350		PF
Output Capacitance	C_{oss}			900		PF
Reverse Transfer Capacitance	C_{rss}			65		PF
SWITCHING CHARACTERISTICS (Note 4)						
Turn-on Delay Time	$t_{d(on)}$	$V_{DS}=12V, R_L=2.1\Omega, V_{GEN}=10V,$ $R_G=2.9\Omega, I_D=5.7A$		14.3		nS
Turn-on Rise Time	t_r			26		nS
Turn-Off Delay Time	$t_{d(off)}$			24		nS
Turn-Off Fall Time	t_f			4.4		nS
Total Gate Charge	Q_g	$V_{DS}=15V, I_D=20A, V_{GS}=4.5V$		9.2		nC
Gate-Source Charge	Q_{gs}			6		nC
Gate-Drain Charge	Q_{gd}			2		nC
Body Diode Reverse Recovery Time	T_{rr}	$I_F=20A, di/dt=100A/\mu s$		21		nS
Body Diode Reverse Recovery Charge	Q_{rr}			6.3		nC
DRAIN-SOURCE DIODE CHARACTERISTICS						
Diode Forward Voltage (Note 3)	V_{SD}	$V_{GS}=0V, I_S=20A$		0.82	1.1	V


NOTES:

1. continue current is limited by bonding wire.
2. Pulse width limited by max. junction temperature.
3. Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$.
4. Guaranteed by design, not subject to production testing


N-Channel Enhancement Mode MOSFET TDM3454

Typical Operating Characteristics


Power Dissipation

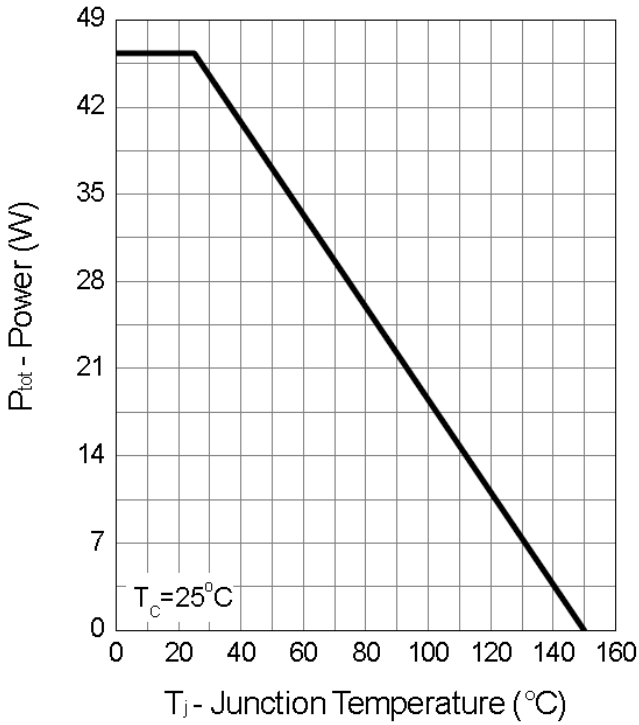


Drain Current

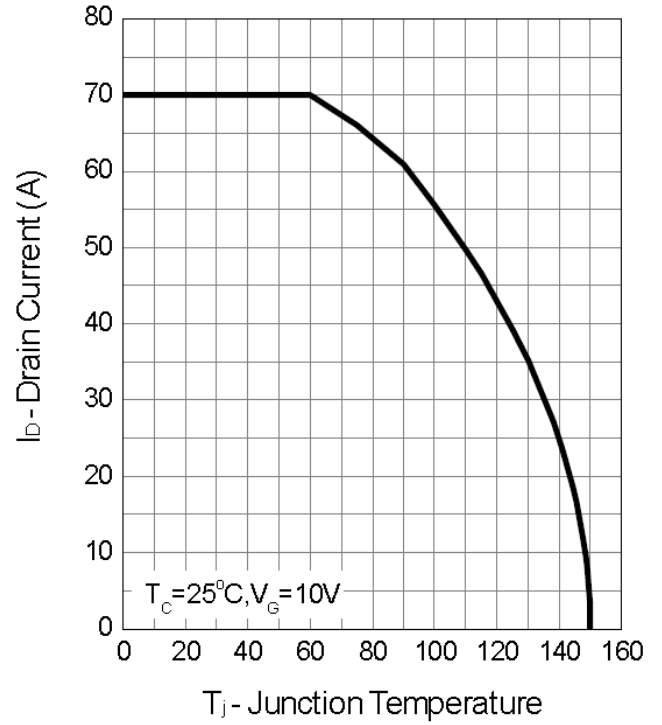

Safe Operation Area

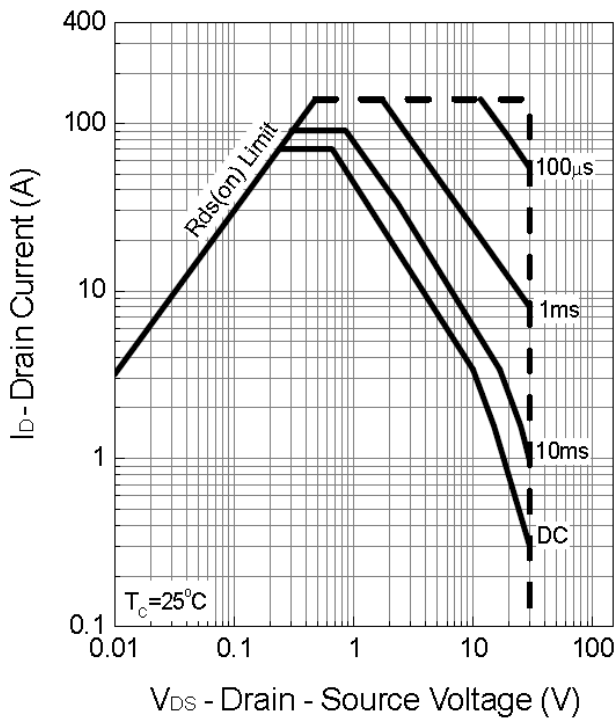


Thermal Transient Impedance

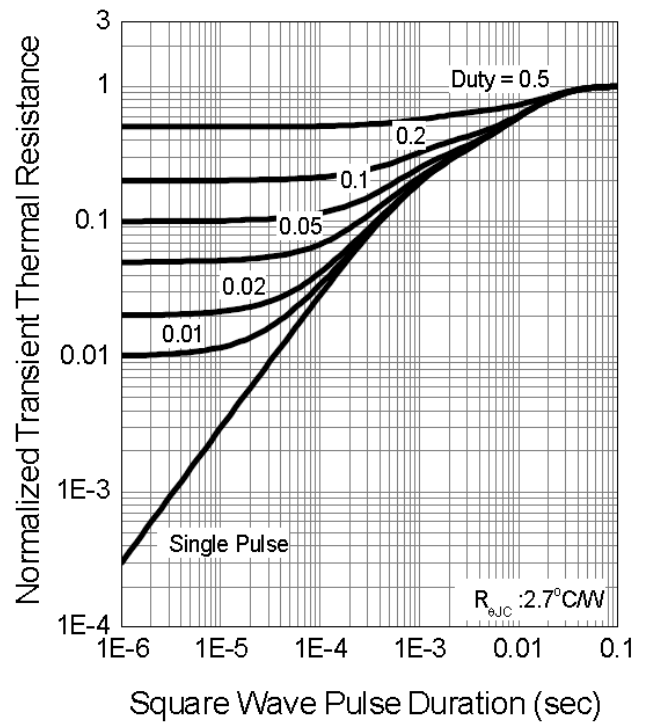


Typical Operating Characteristics(Cont.)


Safe Operation Area

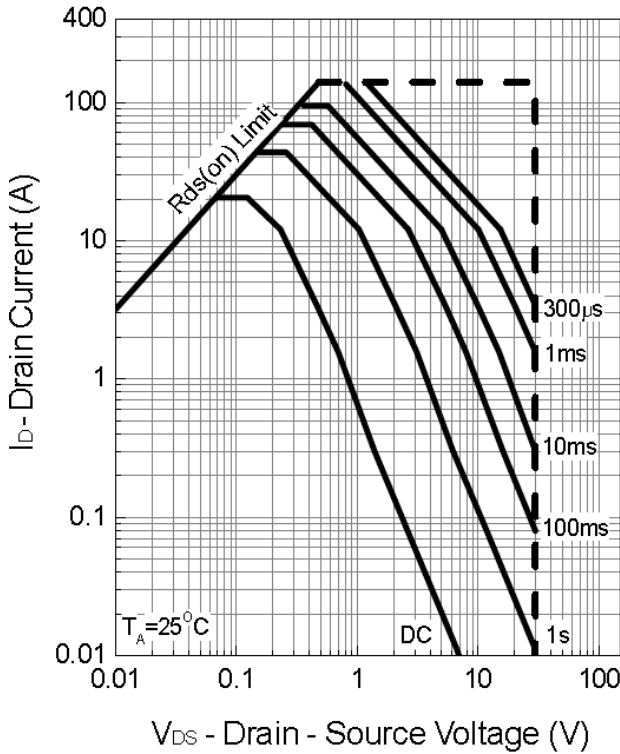


Thermal Transient Impedance

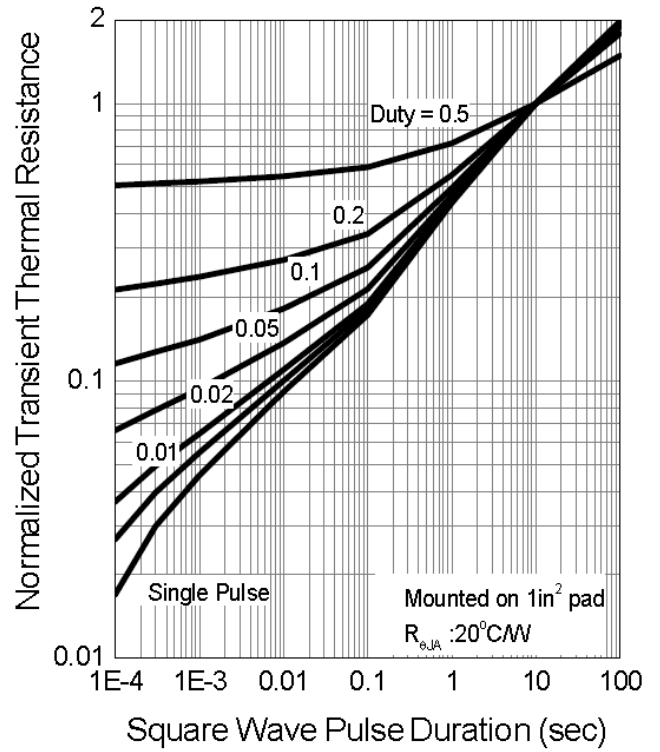

Output Characteristics

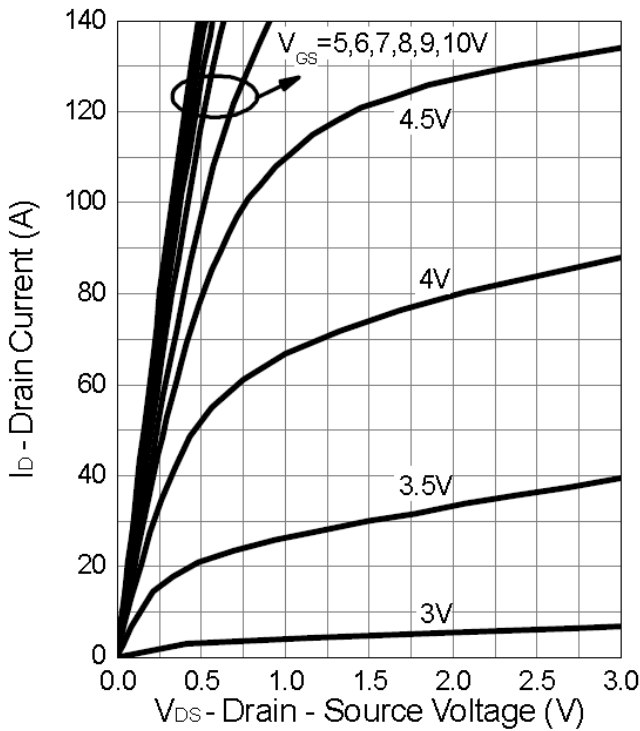


Drain-Source On Resistance

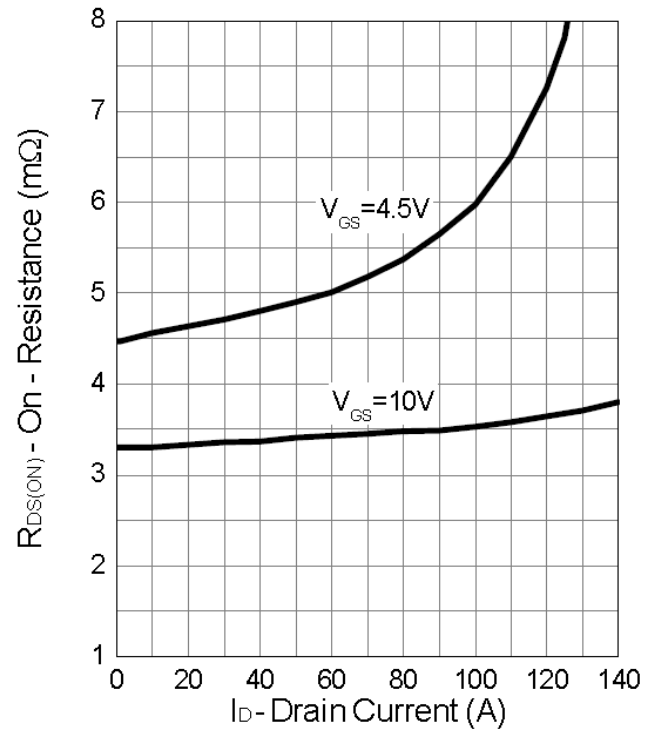


N-Channel Enhancement Mode MOSFET TDM3454

Typical Operating Characteristics (Cont.)


Gate-Source On Resistance

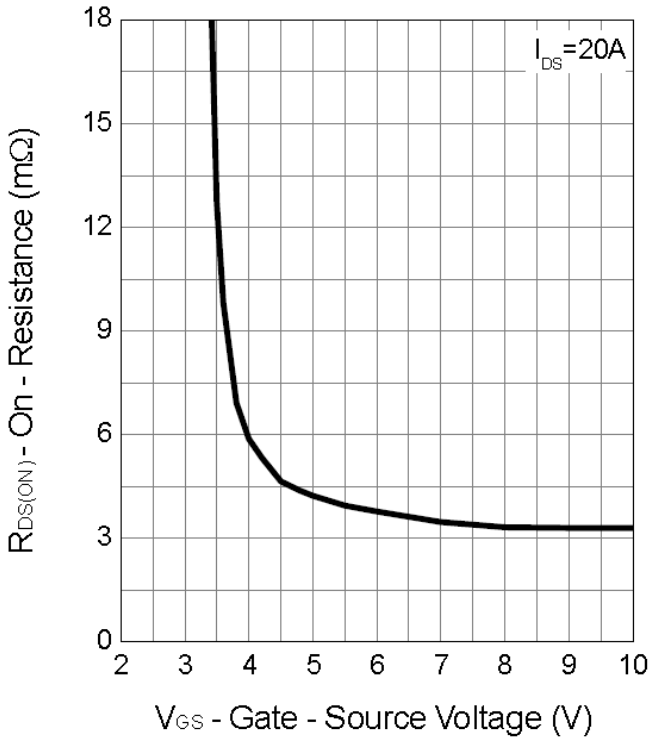


Gate Threshold Voltage

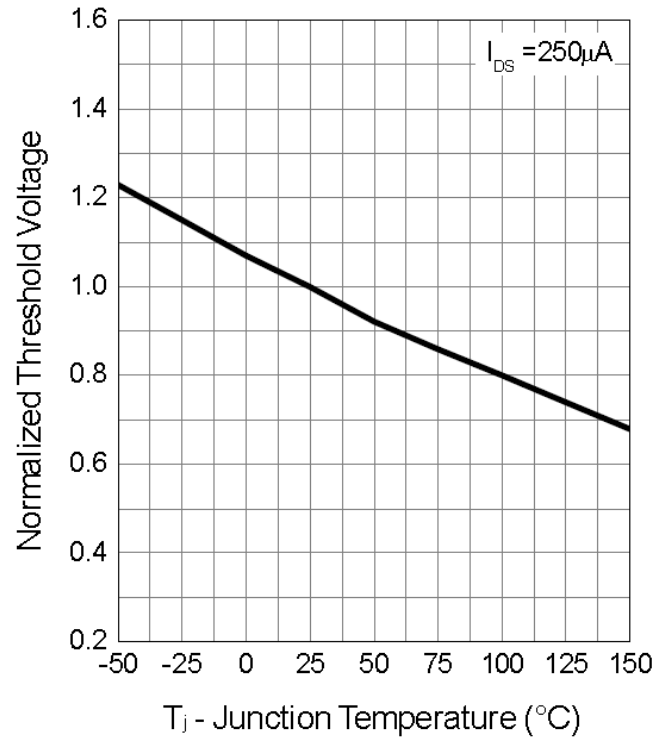

Drain-Source On Resistance

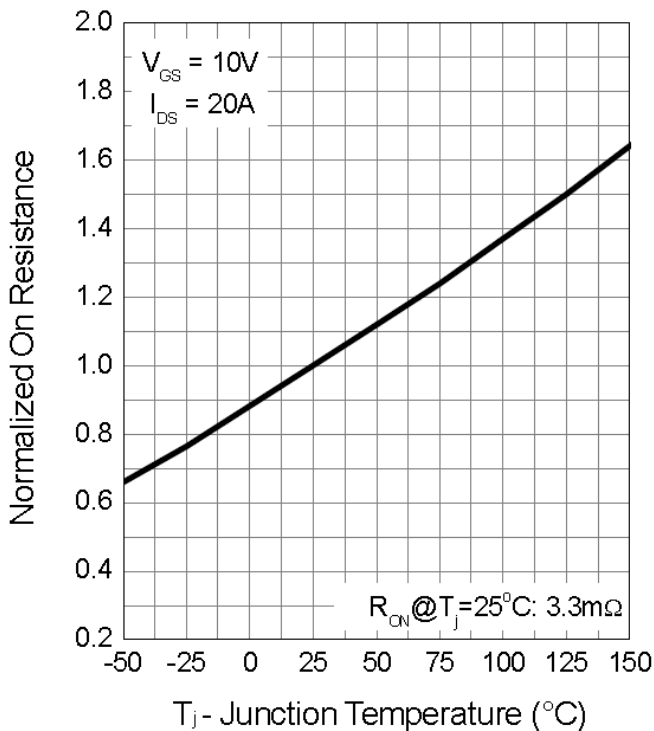


Source-Drain Diode Forward

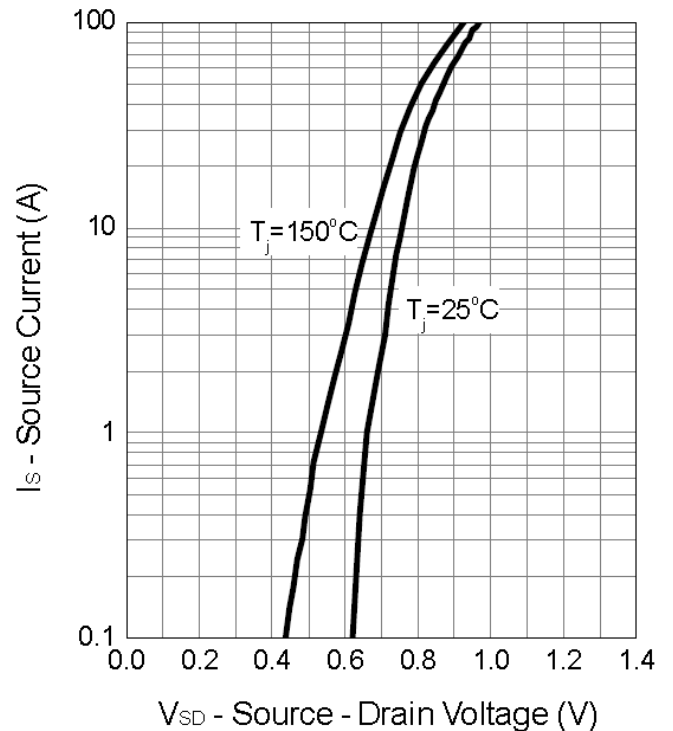


Typical Operating Characteristics (Cont.)


Capacitance

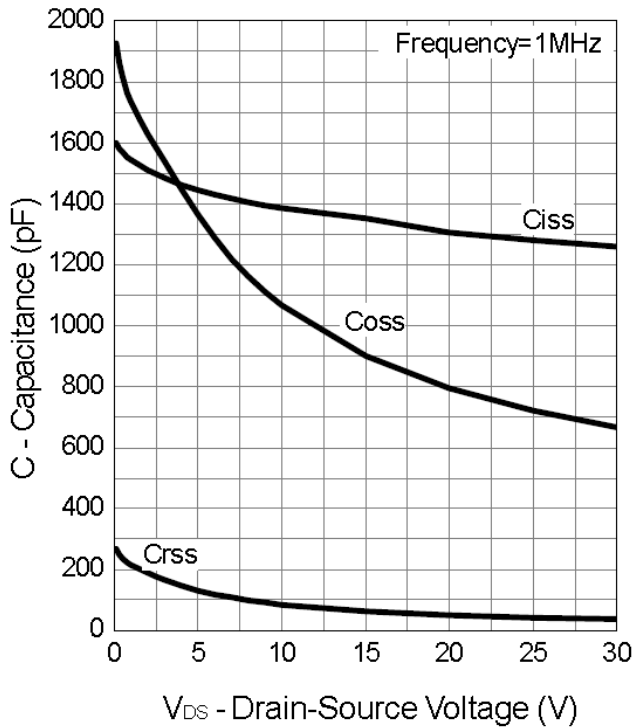

Gate Charge

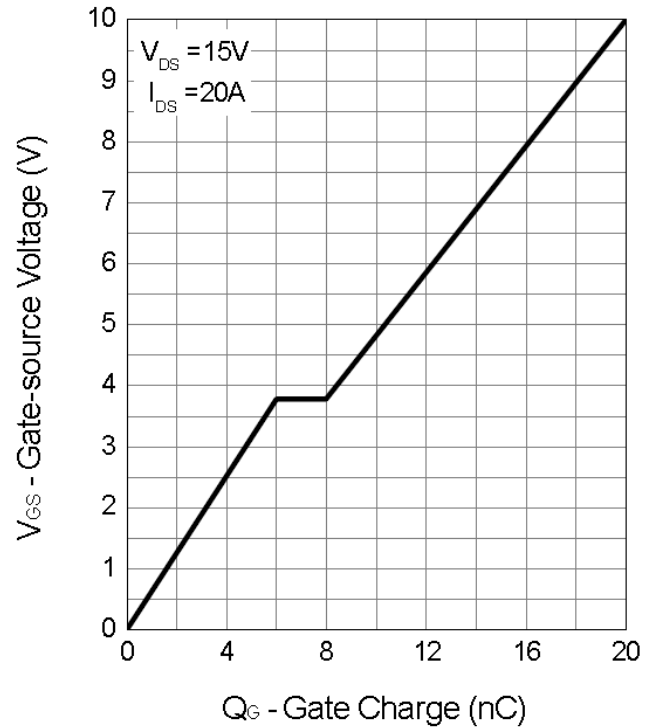


Transfer Characteristics

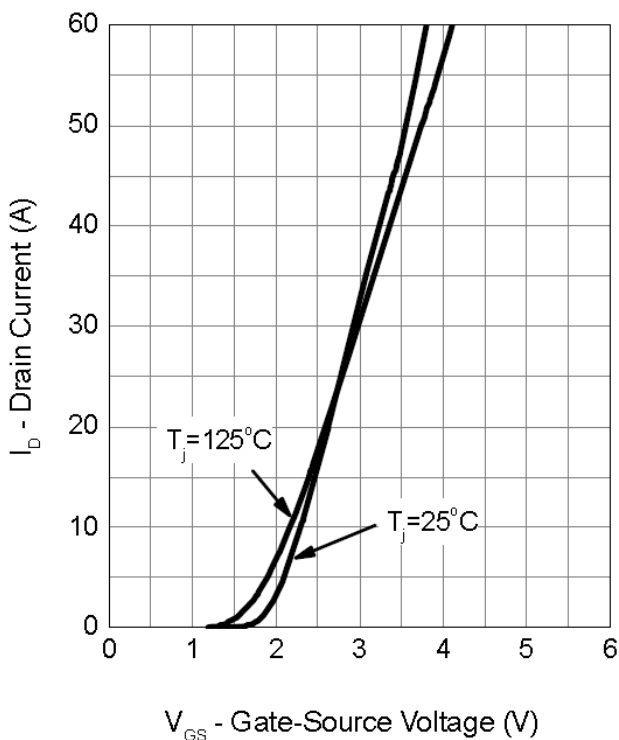


Package Information

DFN5*6-8 Package

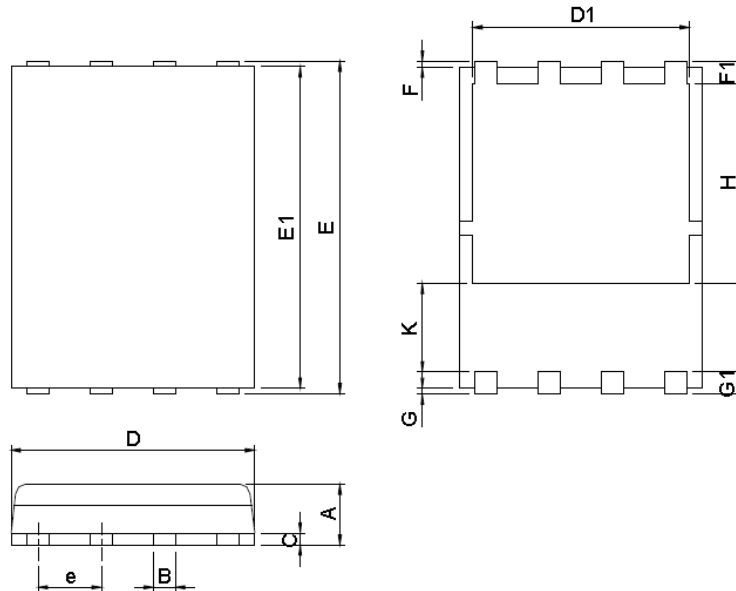

DIMENSIONS	DFN5x6-8			
	MILLIMETERS		INCHES	
	MIN.	MAX.	MIN.	MAX.
A	0.90	1.20	0.035	0.047
B	0.3	0.51	0.012	0.020
C	0.19	0.25	0.007	0.010
D	4.80	5.30	0.189	0.209
D1	4.00	4.40	0.157	0.173
E	5.90	6.20	0.232	0.244
E1	5.50	5.80	0.217	0.228
e	1.27 BSC		0.050 BSC	
F	0.05	0.30	0.002	0.012
F1	0.35	0.75	0.014	0.030
G	0.05	0.30	0.002	0.012
G1	0.35	0.75	0.014	0.030
H	3.34	3.9	0.131	0.154
K	0.762	-	0.03	-

RECOMMENDED LAND PATTERN

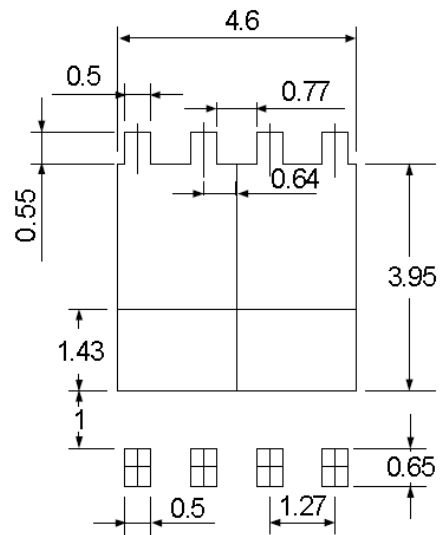

UNIT: mm

Note : 1.Dimension D, D1,D2 and E1 do not include mold flash or protrusions.
Mold flash or protrusions shall not exceed 10 mil.

Design Notes