



RJ45-----以太网接口保护（浪涌 / 静电）

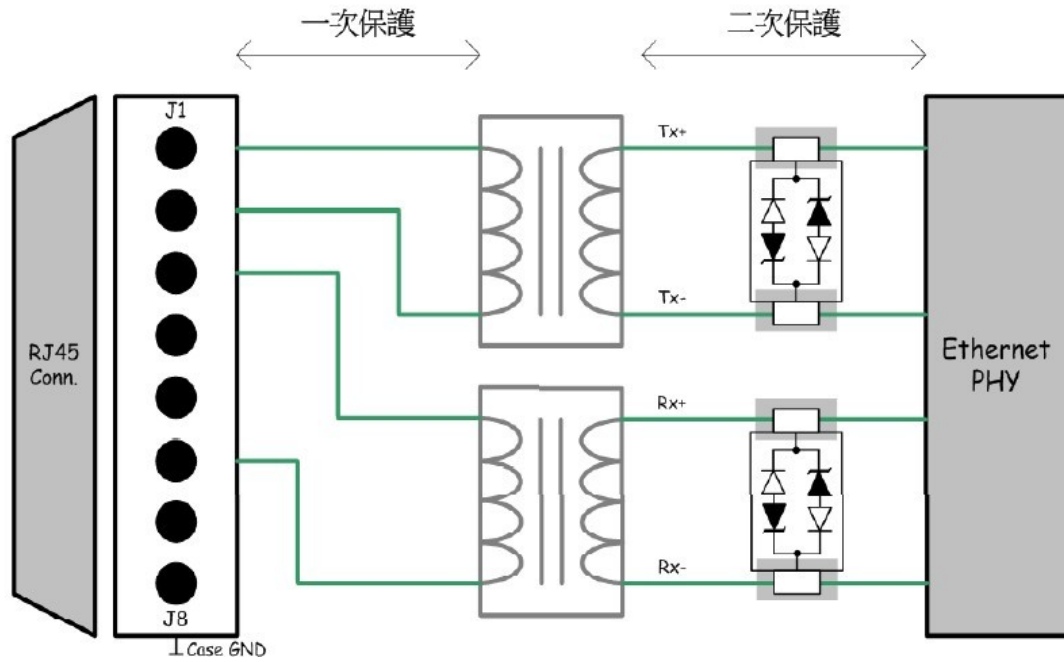

LT-BV05C 可以抵抗 ESD (±8KV/1000 次)


雷击: IEC61000-4-5, 15A (tp=8/20 μs), ESD: IEC61000-4-2, ±15kV
接触放电

RJ45-----以太网接口保护（静电）

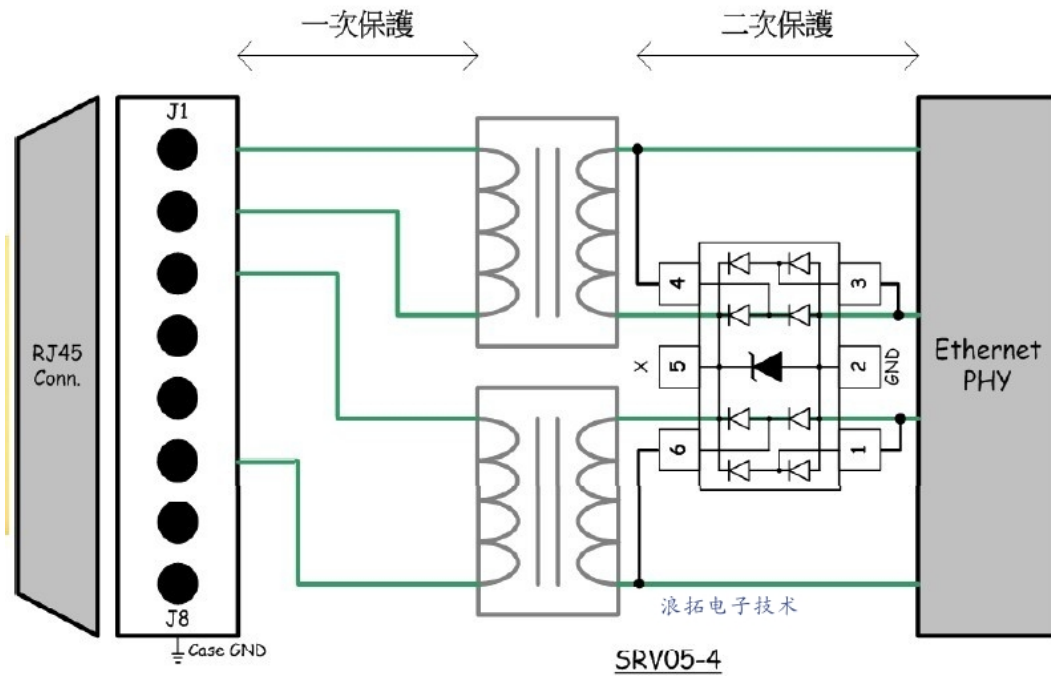

IEC 61000-4-2 (ESD) ± 15 kV (air), ± 8 kV (contact),
IEC 61000-4-4 (EFT) 40 A (5/50 ns),
IEC 61000-4-5 (Lightning) 12 A (8/20 μ s)

RJ45-----以太网接口保护（浪涌 / 静电）

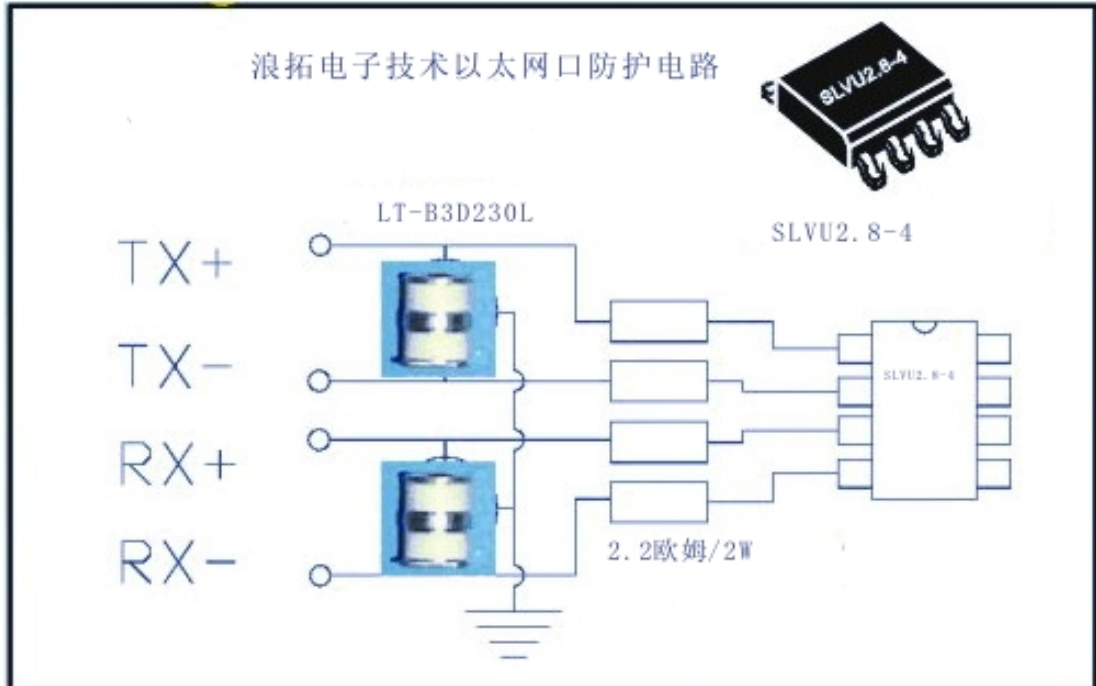

符合 IEC61000-4-5(Level 4)标准

浪涌抗扰性试验（1.2/50 μ s~8/20 μ s）: IEC61000-4-5, Level 3

防雷特性: IEC 61000-4-5 (Surge):24A, 8/20 μ s - Level 2(Line-Gnd) & Level 3(Line-Line)